


FED. SUP CLASS  
1630

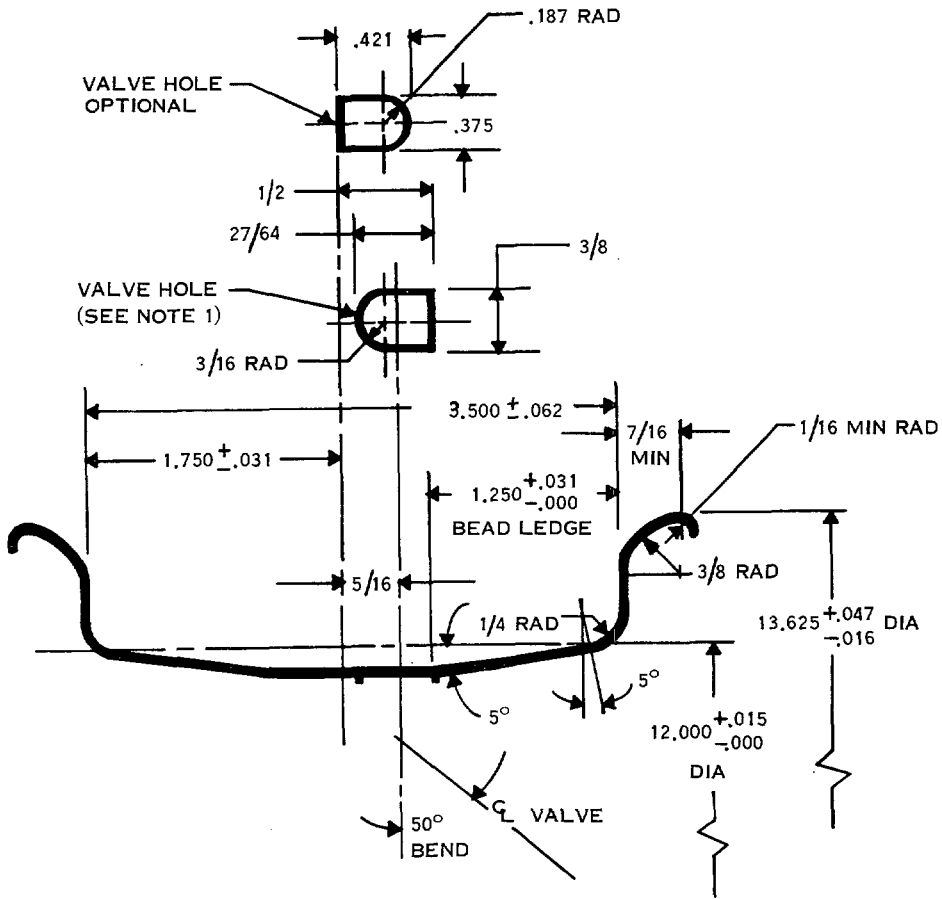

NOTES

- ① VALVE HOLE REQUIRED ON TUBETYPE AND CONVERTIBLE WHEELS ONLY, AND SHALL BE CHAMFERRED PER AND 10593 TUBELESS WHEELS REQUIRE A MACHINED BOSS PER MS33649.
- ② DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS  $\pm 1/64$ , DECIMALS  $\pm .005$ , ANGLES  $\pm 1/2^\circ$ .
- ③ REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

This AND standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User: Navy-MC  
Reviewer: Army-AV Navy-AS

APPROVED 16 SEP 49 REVISED 17 JAN 51 ① 21 SEP 64 ② 17 JUN 1969

P.A. USAF-70	TITLE RIM CONTOUR-20 X 4.4, TYPE VII, EXTRA HIGH PRESSURE, LANDING GEAR WHEEL	AIRFORCE-NAVY AERONAUTICAL DESIGN STANDARD
Other Cust ARMY-AV NAVY-AS		<b>AND 10581</b>
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 1