

MIL-STD-1300A  
22 January 1970

SUPERSEDING

MIL-STD-1300  
21 June 1965

MILITARY STANDARD  
ENGINE, GASOLINE, AIR-COOLED, 6 BHP,  
MILITARY DESIGN, MODEL 4A032,  
INSTALLATION PROCEDURES



FSC 2805

MIL-STD-1300A

DEPARTMENT OF DEFENSE  
Washington, D. C. 20301

Engine, Gasoline, Air-Cooled, 6 BHP, Military Design, Model 4A032,  
Installation Procedures

MIL-STD-1300A

1. This Military Standard is mandatory for use by all Departments and Agencies of the Department of Defense.
2. Recommended corrections, additions, or deletions should be addressed to the U. S. Army Mobility Equipment Command, Directorate of Research, Development and Engineering, Fort Belvoir, Virginia 22060, ATTN: AMSME-RZK-KE.

## MIL-STD-1300A

## CONTENTS

Paragraph		Page
1.	SCOPE . . . . .	1
1.1	Coverage . . . . .	1
1.2	Objective. . . . .	1
2.	REFERENCED DOCUMENTS . . . . .	1
2.1	Governmental . . . . .	1
2.2	Nongovernmental. . . . .	2
3.	DEFINITIONS. . . . .	2
3.1	Definitions. . . . .	2
4.	GENERAL REQUIREMENTS . . . . .	2
4.1	Safety . . . . .	2
4.2	Conditions . . . . .	3
4.3	Design simplicity. . . . .	3
5.	DETAIL REQUIREMENTS. . . . .	3
5.1	Power requirements . . . . .	3
5.2	Operational requirements . . . . .	3
5.3	Maintainability . . . . .	4
5.4	Engine mounting requirements . . . . .	5
5.5	Power transmission requirements. . . . .	9
5.6	Miscellaneous design requirements. . . . .	11

## FIGURES

FIGURE 1.	Model 4A032-II Military Standard Engine Drive End.
2.	Model 4A032-II Military Standard Engine Accessory End. . . . .
3.	Installation Drawing for Military Standard Engine Model 4A032-II . . . . .
4.	Performance Characteristics. . . . .
5.	Maintenance Clearances for Model 4A032 Military Standard Engine. . . . .
6.	Engine Front Mounting Bracket on the 4A032-II Model. . . . .
7.	Engine Rear Mounting Bracket on the 4A032-II Model. . . . .
8.	Beam Mounting Installation for Engine with Direct Mounted Equipment. . . . .
9.	Power Takeoff End Allowable Moment and Load Diagram. . . . .
10.	Power Takeoff End Maximum Distance for Overhung Loads. . . . .

## FIGURES (Cont'd)

11.	Accessory End Allowable Moment and Load Diagram. . . . .
12.	Maximum Spring Force of Vibration Mounts as a Function of Static Deflection . . . . .
13.	Factor $\gamma$ as Function of L and D for Beam Mounting when $H = 0$ . . . . .
14.	Maximum Permissible Spring Force (per Spring) for Beam Mounting when $H = 0$ . . . . .
15.	Natural Frequency and Total Deflection as a Function of Static Deflection. . . . .
16.	Flywheel Coupling Adapter Shaft. . . . .
17.	Shaft Alinement Method (Flexible Coupling) . . . . .
18.	Torsional Tuning Curves for Direct Coupled End Item (For Engine Speed From 2880 to 4320 R.P.M.). . . . .
19.	Coupling Adapter Shaft Stiffness . . . . .
20.	Maximum Limits for Fuel Tank Locations . . . . .
21.	Cooling Air Capacity . . . . .
22.	Military Standard Generator (5 Ampere, 24 Volt) and Electric Starter Wiring Diagram. . . . .
23.	Typical Mounting for Military Standard Generator. . . . .
24.	Generator Mounting Details. . . . .
25.	Pulley, Generator. . . . .
26.	Manual Throttle Control. . . . .
27.	Typical High Oil Temperature Control Installation and Diagram (Not available as GFE) . . . . .

## TABLES

TABLE I	Operational temperature limits . . . . .	3
II	Engine specifications . . . . .	13
III	Fuel consumption . . . . .	15

## APPENDIX

Paragraph 10.	General description of engine. . . . .	12
10.1	Engine specifications. . . . .	12
10.2	Fuel consumption . . . . .	15
10.3	Moment of inertia of end item. . . . .	15

## 1. SCOPE

1.1 Coverage. This standard covers the recommended installation procedures for the model 4A032, 6-hp military design engine.

1.2 Objective. The objective of this standard is to insure compatibility of the engine and the end item of equipment.

## 2. REFERENCED DOCUMENTS

2.1 Governmental. The issues of the following documents in effect on the date of invitation for bids form a part of this standard to the extent specified herein:

## SPECIFICATIONS

MIL-V-173	- Varnish, Moisture-and-Fungus-Resistant (for the Treatment of Communications, Electronic, and Associated Electrical Equipment).
MIL-L-2104	- Lubricating Oil, Internal Combustion Engine (Heavy Duty).
MIL-G-3056	- Gasoline, Automotive, Combat.
MIL-L-10295	- Lubricating Oil, Internal Combustion Engine, Sub-Zero.
MIL-B-11040	- Belt, V; Engine Accessory Drive.
MIL-I-24092	- Insulating Varnish, Electrical, Impregnating.

## STANDARDS

MIL-STD-461	- Electromagnetic Interference Characteristics Requirements for Equipment.
MS35802	- Filter Elements, Fluid, Pressure-Oil, Full-Flow.
MS35876	- Generator, Engine Accessory, D.C., 28-Volt, 5-Ampere.
MS51009	- Spark Plug, Shielded, 18 MM; 1-1/4-Inch Well (Other than Aircraft).
MS51086	- Filter, Fluid, Pressure and Strainer, Sediment; Automotive, Fuel (10 GPH, Coarse Filtration).
MS53013	- Starter, Engine, Electrical, 24-Volt D.C., 3-Inch Frame Diameter, Solenoid-Actuated, Light-Duty.

## MIL-STD-1300A

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Nongovernmental. The issues of the following documents in effect on the date of invitation for bids form a part of this standard to the extent specified herein:

## SOCIETY OF AUTOMOTIVE ENGINEERS

## SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, Two Pennsylvania Plaza, New York, N. Y. 10001.)

## 3. DEFINITIONS

3.1 Definitions. For the purpose of this standard, the following definitions shall apply.

3.1.1 Military design engine, model 4A032. A horizontally-opposed, 4-cylinder, air-cooled, overhead-valve, 32-cubic-inch-displacement gasoline engine having a rating of 6 net continuous horsepower at 3,600 rpm (see figures 1, 2, 3, and 4).

3.1.2 Maximum net corrected brake horsepower. The maximum net corrected brake horsepower rating is the maximum observed horsepower available from the engine at wide-open-throttle conditions at all engine speeds within the operating range with all accessories (including fan, air cleaner, and exhaust system) corrected to standard atmospheric conditions.

3.1.3 Intermittent net brake horsepower. The intermittent net brake horsepower rating is 90 percent of maximum net corrected brake horsepower and intermittent duty is defined as one hour at intermittent horsepower followed by 15 minutes at rated load or less.

3.1.4 Continuous net brake horsepower. The continuous net brake horsepower rating is 6 observed horsepower at 3,600 rpm.

## 4. GENERAL REQUIREMENTS

4.1 Safety. When installed in the end item, rotating, reciprocating and high-temperature parts so located as to become a hazard to operating personnel and equipment shall be insulated or guarded. Exhaust mufflers and piping shall be located to minimize hazard to operating personnel.

4.2 Use conditions. The installation shall withstand shock load requirements as specified in the end-item specification. The installation shall be such that the engine will not be required to operate in a tilted position of more than 15 degrees from the horizontal in any plane at any time.

4.3 Design simplicity. The design of the end item shall be such that complete removal of the engine from the driven component or the driven component from the engine can be accomplished without the use of special tools.

## 5. DETAIL REQUIREMENTS

5.1 Power requirements. The maximum horsepower required to drive the end-item equipment and power transmission system under the environmental extremes specified for the end item shall not exceed the net continuous horsepower rating of the engine unless intermittent operation is indicated in the end-item specification, at which time the intermittent power requirement shall not be exceeded.

5.2 Operational requirements. The end item design and location of hoods and other external components shall not cause the engine to exceed the operational temperature limits specified in table I under all operating conditions and environmental extremes specified in the end-item specifications.

Table I. Operational Temperature Limits

Location		Maximum temperature, ° F.
Ambient air	In vicinity of engine	120
Cylinder head	Under spark plug	475
Lubricating oil	In oil sump	265
Cooling air*	At cooling air outlet	225
Carburetor inlet air*	Air cleaner inlet	150

\* Not applicable for arctic conditions.

## MIL-STD-1300A

5.3 Maintainability. The engine installation shall permit maximum accessibility for replacement, adjustment, and repair to all parts of the engine with minimum disturbance to adjacent parts of the end item without the use of special tools (see figure 5).

5.3.1 Cooling and starting system. Clearance shall be provided for:

- (a) Winding the starter rope on the pulley with a gloved hand (arctic type glove).
- (b) Operation of the manual throttle control.
- (c) Operation of the choke control.
- (d) Operation of the ignition switch.
- (e) Removal of the electric starter.\*
- (f) Generator belt adjustment.\*

\* When these accessories are required by the end-item specification.

5.3.2 Fuel system. Clearance shall be provided for:

- (a) Carburetor adjustments.
- (b) Removal of the fuel filter.
- (c) Connecting an auxiliary fuel line.

5.3.3 Induction system. Clearance shall be provided for:

- (a) Servicing the air cleaner.
- (b) Operation of the air cleaner winterization selector lever.
- (c) Observation of the air cleaner restriction indicator.

5.3.4 Lubricating system. Clearance shall be provided for:

- (a) Removal and insertion of the oil gage rod and for adding oil with or without a removable spout or funnel (see figure 5).
- (b) Removal and replacement of the oil drain plug and the drainage of oil. The oil shall drain completely and shall not flow over any part of the end item. An extension to the crankcase drain system is permissible.
- (c) Servicing the oil filter.

5.3.5 Governor system. Clearance shall be provided for governor speed and linkage adjustments.

5.3.6 Ignition system. Clearance shall be provided for:

- (a) Removal and replacement of spark plugs, high-tension cables, breaker points, and capacitors, and for adjustment of the breaker points.
- (b) Viewing the ignition timing mark.

5.3.7 Valves. Clearance shall be provided for the removal of rocker-arm covers and setting of valve tappet clearance.

5.4 Engine mounting requirements. The mounting brackets as shown in figures 6 and 7 are furnished with model 4A032-II engines. Mounting brackets for all other model 4A032 engines shall be furnished by the end-item manufacturer. The use of mounting brackets of an alternate design shall utilize all of the engine mounting flanges. The mounting brackets or engine mounting pads or flanges shall not deflect or deform when the engine is operated under any condition specified herein.

5.4.1 Vibration isolation. Suitable vibration isolators shall be used when shock mounting is specified in the end-item specification. The maximum allowable spring force for four vibration isolators equally spaced about the center of gravity of the end item shall be calculated in accordance with 5.4.3. When isolators are not equally spaced about the center of gravity, a complete analysis shall be conducted to determine the maximum permissible spring force for each isolator. The maximum permissible spring force for each isolator shall be limited by the design requirements specified in 5.4.2.

5.4.2 Design requirements for mounting end item. The critical stress point of the engine due to mounting the end item is in the fan housing 0.75 inch from the end-item mounting flange (see figure 8). The maximum resultant moment at this point shall not exceed 500 pound-feet (lb-ft) at any time. Cantilever mounting of the end item to the engine is prohibited. Figures 9, 10, and 11 show the allowable shear and end moment loads that may be applied to the engine bearings by items attached directly to the crankshaft such as belt pulleys, generator rotors, and pump rotors.

5.4.3 Method for calculating maximum allowable spring force. The final spring force of four vibration isolators equally spaced about the center of gravity of the end item shall not apply a G-magnification factor to the weight of the end item that will cause a moment at the critical plane in the fan housing exceeding 500 lb-ft when calculated as shown in figures 8, 12, 13, 14, and 15.

MIL-STD-1300A

5.4.4 Procedure. The following procedure shall be followed in selecting four vibration mounts equally spaced about the center of gravity of the end item to withstand free-fall shock load requirements for a beam-mounted end item (see figure 8):

- (a) Determine weight of the driven equipment, e.g.,  $W_{eq} = 67$  lb.
- (b) Select a vibration isolator, e.g.,  $k = 1,000$  lb/inch (obtain spring constant from manufacturer).
- (c) Calculate the static deflection using the following equation:

$$\delta_o = \frac{W_e + W_{eq}}{4k}$$

Where  $\delta_o$  = static deflection in inches  
 $k$  = spring constant in lb/inch  
 $W_e$  = weight of engine = 80 lb  
 $W_{eq}$  = weight of equipment in pounds

Therefore,  $\delta_o = 0.0368$  inch

- (d) From design chart (figure 12), determine the maximum spring force for an 18-inch free-fall shock load.

$$F_s = 1,187 \text{ lb/spring}$$

- (e) If the spring force  $F_s'$  is desired for a free fall other than 18 inches, then read the ratio  $F_s'/F_s$  from the extra plot given in figure 12.

EXAMPLE: For a 24-inch free fall,  $F_s'/F_s = 1.145$   
 Therefore,  $F_s' = 1,187 \times 1.145 = 1,360$  lb/spring

- (f) Determine the maximum spring force permitted by the 500 lb-ft critical moment using the following equation (see figure 8):

$$F_{s(\max)} = 1,500 \left( 1 + \frac{80}{W_{eq}} \right) \left( \frac{C+D}{C(D-L) + \frac{80(D)}{W_{eq}} (H)} \right) \text{ lb/spring}$$

$$1,500 = \frac{(500 \text{ lb-ft}) (12 \text{ in./ft})}{4 \text{ springs}}$$

Where  $F_{s(max)}$  = maximum permissible spring force in lb/spring

$W_{eq}$  = weight of equipment in pounds.

$C$  = distance in inches between reaction force  $R_1$  and the limiting moment plane located 0.75 inch inward and parallel to the fan housing mounting face.

$D$  = distance in inches between reaction force  $R_2$  and the limiting moment plane.

$H$  = distance in inches between engine C. G. and reaction force  $R_1$  ( $H$  is negative when  $R_1$  is between engine C. G. and limiting moment plane).

$L$  = distance in inches between equipment C. G. and the limiting moment plane.

EXAMPLE: Equipment C. G. to mounting face distance = 4.80 inches

$$L = 4.80 + 0.75 = 5.55 \text{ inches}$$

Equipment mounting leg  $R_2$  to mounting face  
Distance = 3.25 inches.

$$D = 3.25 + 0.75 = 4 \text{ inches.}$$

$H = +1$  inch (engine mounting leg,  $R_1$ , is located to the right side of engine C. G., see figure 8).

Engine C. G. to mounting face distance = 8.45 inches  
(see figure 3).

$$C = 8.45 - 0.75 + 1 = 8.7 \text{ inches}$$

$$W_{eq} = 67 \text{ lb.}$$

$$F_{s(max)} = 1,500 \left( 1 + \frac{80}{67} \right) \left( \frac{8.7 + 4}{8.7(4-5.55) + \frac{80(4)(1)}{67}} \right)$$

$$= -4,800 \text{ lb/spring.}$$

Note: Only the numerical value of  $F_{s(max)}$  is required and the minus sign can be ignored when it occurs; consider  $F_{s(max)} = 4,800$  lb/spring.

Determination of the maximum permissible spring force  $F_{s(max)}$  can be simplified by placing the rigid engine support  $R_1$  in line with the engine C. G.; i.e., make  $H = 0$ .

MIL-STD-1300A

Therefore,  $C = 8.45 - 0.75 = 7.7$  inches and the equation for the maximum permissible spring force reduces to

$$F_{s(\max)} = 195 \left( 1 + \frac{80}{W_{eq}} \right)^\gamma$$

Where  $\gamma = (7.7 + D)/(D-L)$

$\gamma$  is plotted in figure 13 for various values of D and L.

$F_s$  is plotted in figure 14 for various values of  $\gamma$  and  $W_{eq}$ .

**EXAMPLE:** Determining  $F_{s(\max)}$  by use of figures 13 and 14 where engine support  $R_1$  is in the same vertical plane as the engine C.G.,

$$H = 0$$

$$D = 4 \text{ inches}$$

$$L = 5.55 \text{ inches}$$

$$\gamma = -7.55 \text{ (figure 13)}$$

$$W_{eq} = 67 \text{ lb}$$

$$F_{s(\max)} = 3,240 \text{ lb/spring (figure 14)}$$

**Note:** The maximum spring force  $F_s'$  of 1,360 lb/spring for a 24 inch free fall is less than the permissible spring forces  $F_{s(\max)}$  of 4,800 lb/spring when  $H = 1$  and 3,240 lb/spring when  $H = 0$ .

Therefore, four vibration isolators with spring constants of 1,000 pounds per inch will be suitable for either design providing the natural frequency and total deflection are within the design specification.

(g) Determine natural frequency and total deflection (see figure 15). For an 18-inch free fall:

$$\text{Static deflection } \delta_o = 0.0368 \text{ inch}$$

$$\text{Natural frequency } F_o = 979 \text{ CPM}$$

$$\text{Total deflection } \delta_t = 1.19 \text{ inches}$$

To find the total deflection  $\delta_t'$  for a free fall from a height other than 18 inches, read the ratio  $\delta_t' / \delta_t$  from the extra plot in figure 15.

EXAMPLE: For a 24-inch free fall,  $\delta_t' / \delta_t = 1.152$

Therefore,  $\delta_t' = 1.152 \times 1.19 = 1.37$  inches

The natural frequency F shall not be greater than 70 percent of the engine governed speed.

5.4.5 Maximum axial thrust. The maximum axial thrust that can be safely applied to the flywheel end of the crankshaft without damage to the crankcase is 400 pounds.

5.5 Power transmission requirements. The driven unit shall be connected to the engine by one of the following methods. Torsional vibration determinations shall be made as specified in 5.5.5.

5.5.1 Rigid coupling. When a rigid coupling is used, the driven equipment shaft shall be in accordance with figure 16 and the overhung moment shall not exceed the limits shown in figures 9 and 10. The taper on the coupling adapter shaft shall have not less than 80 percent contact with the driven shaft.

5.5.2 Flexible coupling. When a flexible coupling is used between the engine and end item, the coupling shall provide the correct torsional flexibility and a sufficient degree of dampening to insure that the maximum vibration torque does not exceed 658 lb-in. (see 5.5.5.2).

5.5.2.1 Shaft misalignment. The misalignment of the engine shaft and driven equipment shaft shall not exceed the limits shown in figure 17 when a flexible coupling is used between the engine and end item.

5.5.2.2 Coupling installation. The flexible coupling flange or coupling adapter shaft shall be fastened to the engine flywheel by a piloted 4-bolt connection (see figure 16).

5.5.3 Belt drive. V-belts shall conform to MIL-B-11040. The belt load shall not exceed the limits shown in figures 9, 10, and 11.

5.5.3.1 Pulley alinement. The alinement of the pulleys shall insure belt life and power transmission.

5.5.3.2 Pulley installation. The pulley shall be positively located on the engine flywheel by a flywheel coupling adapter shaft (see figure 16).

5.5.4 Gear drive. When an independent reduction gear drive is used, it shall be coupled to the engine through a suitable flexible coupling (see 5.5.2).

## MIL-STD-1300A

5.5.5 Method for calculating torsional vibration stresses. Safe torsional vibration natural frequencies for the engine are above 12,000 vibrations per minute (vpm). Natural frequencies below 12,000 vpm can cause shaft breakage and equipment failure. The procedure in 5.5.5.1 shall be used to match the polar moment of inertia of the end-item rotating mass and the coupling adapter shaft stiffness to the engine. If the design of the end item dictates that the natural frequency be below 12,000 vpm, a complete torsional analysis is mandatory.

5.5.5.1 Procedure for directly connected end item.

- (a) Obtain the polar moment of inertia of the end-item rotating mass or use the procedure of 10.4 to calculate the inertia.
- (b) Determine the stiffness of the shaft between the flywheel and the inertia mass (see figure 19). Use the minimum shaft diameter in the span between the flywheel and the attached inertia mass. The minimum diameter should be at least 10 percent of the span length.
- (c) Determine the torsional natural frequency of the system from the curves as shown in figure 18. Use the natural frequency corresponding to an attached inertia mass of 1.4 lb-in.-sec<sup>2</sup> for all inertia values over 1.4 lb-in.-sec<sup>2</sup>.
- (d) Example:

$$\begin{aligned} \text{End item inertia } WR^2 &= 182 \text{ lb-in.}^2 \\ J_m &= 0.471 \text{ lb-in.-sec}^2 \end{aligned}$$

Shaft length from flywheel to attached inertia mass = 12 inches

Minimum shaft diameter = 1.00 in.

Shaft stiffness =  $0.99 \times 10^5$  lb-in./rad (figure 19)

System natural frequency = 7,500 vpm (figure 18)

The natural frequency is in the high torsional stress zone (below 12,000 vpm and the selected shaft cannot be used.

Therefore, increase the minimum shaft diameter to 1.25 inches.

Shaft stiffness =  $2.43 \times 10^5$  lb-in./rad (figure 19)

System natural frequency = 12,000 vpm (figure 18)

The natural frequency is above 12,000 vpm and within the safe torsional zone.

MIL-STD-1300A

5.5.5.2 Procedure for flexible coupling connected load. The curves as shown in figures 18 and 19 are applicable only when the load is connected to the engine with a rigid coupling. When a flexible coupling is used, a complete torsional analysis shall be conducted utilizing the stiffness of the flexible coupling. The maximum vibration torque shall not exceed 658 lb-in.

5.6 Miscellaneous design requirements.

5.6.1 Alteration. The engine shall not be altered in any manner by the end-item manufacturer for assembly or installation purposes.

5.6.2 Fuel tank. The capacity of the fuel tank for the end item may be determined from table III. The location of the fuel tank and maximum allowable length of fuel supply line shall not exceed the limits specified in figure 20.

5.6.3 Cooling-air outlet. Adequate clearance shall be provided for the outlet of cooling air (see figures 5 and 21).

5.6.4 Exhaust system. The back pressure of the exhaust system, including mufflers, shall be measured 2 inches behind the manifold outlet (in the exhaust pipe or muffler inlet pipe applied to the engine) and shall not exceed 8 inches of water at 6 hp load, 3,600 rpm.

5.6.5 Air cleaner inlet. The air cleaner inlet shall be free from obstructions.

Custodians:

Army - ME  
Navy - MC  
Air Force - 82

Preparing activity:

Army - ME  
Project No. 2805-0448

User interest:

Army - AT, EL  
Navy - YD

MIL-STD-1300A

## APPENDIX

10. General description of engine. The model 4A032 military design engine is a horizontally-opposed-4-cylinder, overhead valve, air-cooled, spark-ignition, 4-cycle, gasoline engine. Performance characteristics of the engine are shown in figure 4. Figures 1 and 2 are photographs of the model 4A032-II military design engine illustrating the major components on the drive and accessory ends, respectively. The installation drawings in figure 3 illustrate the overall dimensions of the engine, the location of the major components, and the detailed dimensions of the engine mounting flanges, equipment mounting flange, and power takeoff flange.

10.1 Engine specifications. The engine specifications are presented in table II. In addition, the following paragraphs describe certain features and components in more detail.

10.1.1 Fuel pump. The fuel pump is a single acting, diaphragm-type pump rated for a static pressure range between 1.5 psi minimum to 5.00 psi maximum, measured at a point 16 inches above fuel pump outlet with pump operating at 1,800 strokes per minute. The flow pressure head is between 1.75 psi and 3.00 psi with a normal head pressure of 2 psi. The rated capacity of the pump at 3,600 rpm engine speed is 5 gallons per hour.

10.1.2 Exhaust system. The engine contains single exhaust manifolds on each side. Self-supported mufflers and exhaust pipes may be attached to either end of the exhaust manifolds (see figure 3).

10.1.3 Cooling system. A centrifugal fan draws cooling air past the cylinder heads, cylinder barrels, and oil pan and discharges the heated air out of the engine fan housing. A thermostatically controlled door on the winterization shroud regulates the engine operating temperatures under all environmental conditions. The cooling airflow is 970 cfm at 3,600 rpm (see figure 21).

10.1.4 Starting system. The engine is furnished with a rope starting system. A 24-volt electric starter (MS53013-1) is available as optional equipment. Figure 22 shows the wiring diagram for the electric starting system.

10.1.5 Generator. A 24-volt, 5-ampere military standard generator and cut-out regulator (MS35876-1) is available as optional equipment. The generator mounts on top of the engine as illustrated in figure 23.

## MIL-STD-1300A

Figure 22 shows the wiring diagram for the generator. Figure 24 contains the details necessary for fabricating the generator mounting brackets. Figure 25 shows the details necessary to fabricate the proper size generator pulley.

**10.1.6 Manual throttle control.** The manual throttle control permits operation below governed engine speed. The engine speed can be controlled remotely by attaching a control cable to the manual throttle control as illustrated in figure 26.

**10.1.7 High-oil-temperature control.** The engine is not furnished with a high-oil-temperature control device. However, one of the two drain plugs can be replaced with a high-oil-temperature control switch as illustrated in figure 27.

**10.1.8 Low-oil-pressure-control.** The engine is not furnished with a low-oil-pressure-control device, or oil pressure gage. However, a low-oil-pressure cut-off switch or a pressure gage may be connected by inserting a pipe tee in the governor lubrication supply pipe. The normal minimum lubricating oil pressure is 20 psi at 3,600 rpm.

Table II. Engine Specifications

Military design engine, model 4A032:

**A. Engine:**

Number of cylinders.....	4	
Bore, inches.....	2.25	
Stroke, inches.....	2.00	
Total displacement, cubic inches.....	32	
Rated horsepower at 3,600 rpm.....	6.0	BHP
Maximum horsepower at 3,600 rpm (as shipped).....	9.0	BHP
Maximum horsepower at 3,600 rpm (after break-in).....	10.1	BHP
Maximum torque at 2,000 rpm, lb-ft.....	18.9	
Compression ratio.....	6.2:1	
Speed range, rpm (for continuous operation).....	2,000 - 4,000	

**B. Fuel system:**

Fuel pump.....	diaphragm
Fuel filter.....	MS51086
Fuel consumption at rated load and speed, lb/bhp/hr.....	0.95
Fuels.....	MIL-G-3056

MIL-STD-1300A

Table II. Engine Specifications (cont'd)

<b>C. Lubrication system:</b>	
Lubrication system.....	forced feed and splash
Oil sump capacity without filter, quarts.....	1-5/8
Oil filter capacity, quarts.....	1/2
Oil consumption, maximum at rated load and speed, lb/bhp/hr.....	0.005 average for 1,500 hours
Oil filter element.....	MS35802-1
Lubricants.....	MIL-L-2104 and MIL-L-10295
<b>D. Ignition:</b>	
Ignition system.....	magneto
Spark plug.....	18-mm (MS51009-1)
Radio-interference suppression.....	MIL-STD-461 (table A-1)*
<b>E. Governor characteristics:</b>	
Speed regulation, percent.....	3
Rated load speed, rpm.....	3,600
No load speed, rpm.....	3,708 (max)
Engine speed stability (at constant value of load), percent.....	+ 1/2 of 1
Maximum speed surging characteristics:	
Rated load to no load, seconds.....	6
No load to rated load, seconds.....	4
Maximum speed change during surging period, percent.....	5
Rated load to no load, rpm.....	180
No load to rated load, rpm.....	180
<b>F. Engine and accessories:</b>	
Air cleaner.....	dry type cleanable element
Cranking system.....	rope
Main bearings.....	end - steel-backed copper-lead, center - tin-plated aluminum
Crankshaft rotation, viewed from drive end.....	counterclockwise
Dry weight, pounds.....	75
Life between major overhaul or rebuild, hours.....	1,500

\* Engines covered by this standard have been designed to meet the electronic compatibility requirements of MIL-E-55301(EL).

MIL-STD-1300A

Table II. Engine Specifications (conc'd)

G. Overall dimensions:	
Height, inches.....	14-1/2
Length, inches.....	19-1/16
Width, inches.....	20-1/8
H. Environmental extremes:	
Engine operation.....	+120° to -25° F.
Engine storage.....	+150° to -80° F.
Engine starting capacity without preheat.....	+120° to -25° F.
Starting with preheat.....	-25° to -50° F.
Fungusproofing.....	MIL-V-173 and MIL-I-24092
Humidity extreme, percent relative humidity.....	85% at 85° F.
Tilt operation, degrees in any plane (max).....	15
Maximum elevation for rated power, feet.....	8,000

10.2 Fuel consumption. The fuel consumption characteristics of the 6 bhp military design engine at 3,600 rpm are presented in table III. The effect of altitude is insignificant.

Table III. Fuel Consumption

Brake horsepower	1.5	3.0	4.5	6.0	7.5	9.0	10.5
Fuel consumption, gal/hour	0.5	0.74	0.88	0.95	1.04	1.16	1.35

10.3 Moment of inertia of end item. Determine the polar moment of inertia of a balanced pivoted mass which is not easy to remove or handle, such as the rotor of an electric generator, as follows:


- (a) Support the rotating mass in a horizontal plane on antifriction bearings or on knife edges.
- (b) Attach a known weight,  $W$ , to the mass at a distance,  $L$ , from the axis of rotation. (When the mass is not accessible and the shaft rotates with it, attach the weight to the shaft with a light rigid rod of length  $L$ .)

## MIL-STD-1300A

- (c) Set the system in oscillation at amplitudes of 10 degrees or less and measure the period T.
- (d) Determine the moment of inertia using the following formula:

$$J = WL \left\{ \left( \frac{T}{2\pi} \right)^2 - \frac{L}{G} \right\}$$


Where J = moment of inertia, lb-in.-sec<sup>2</sup>  
W = weight of mass, lb  
L = length of rod, inches  
T = second/period  
G = acceleration of gravity = 386 in./sec<sup>2</sup>

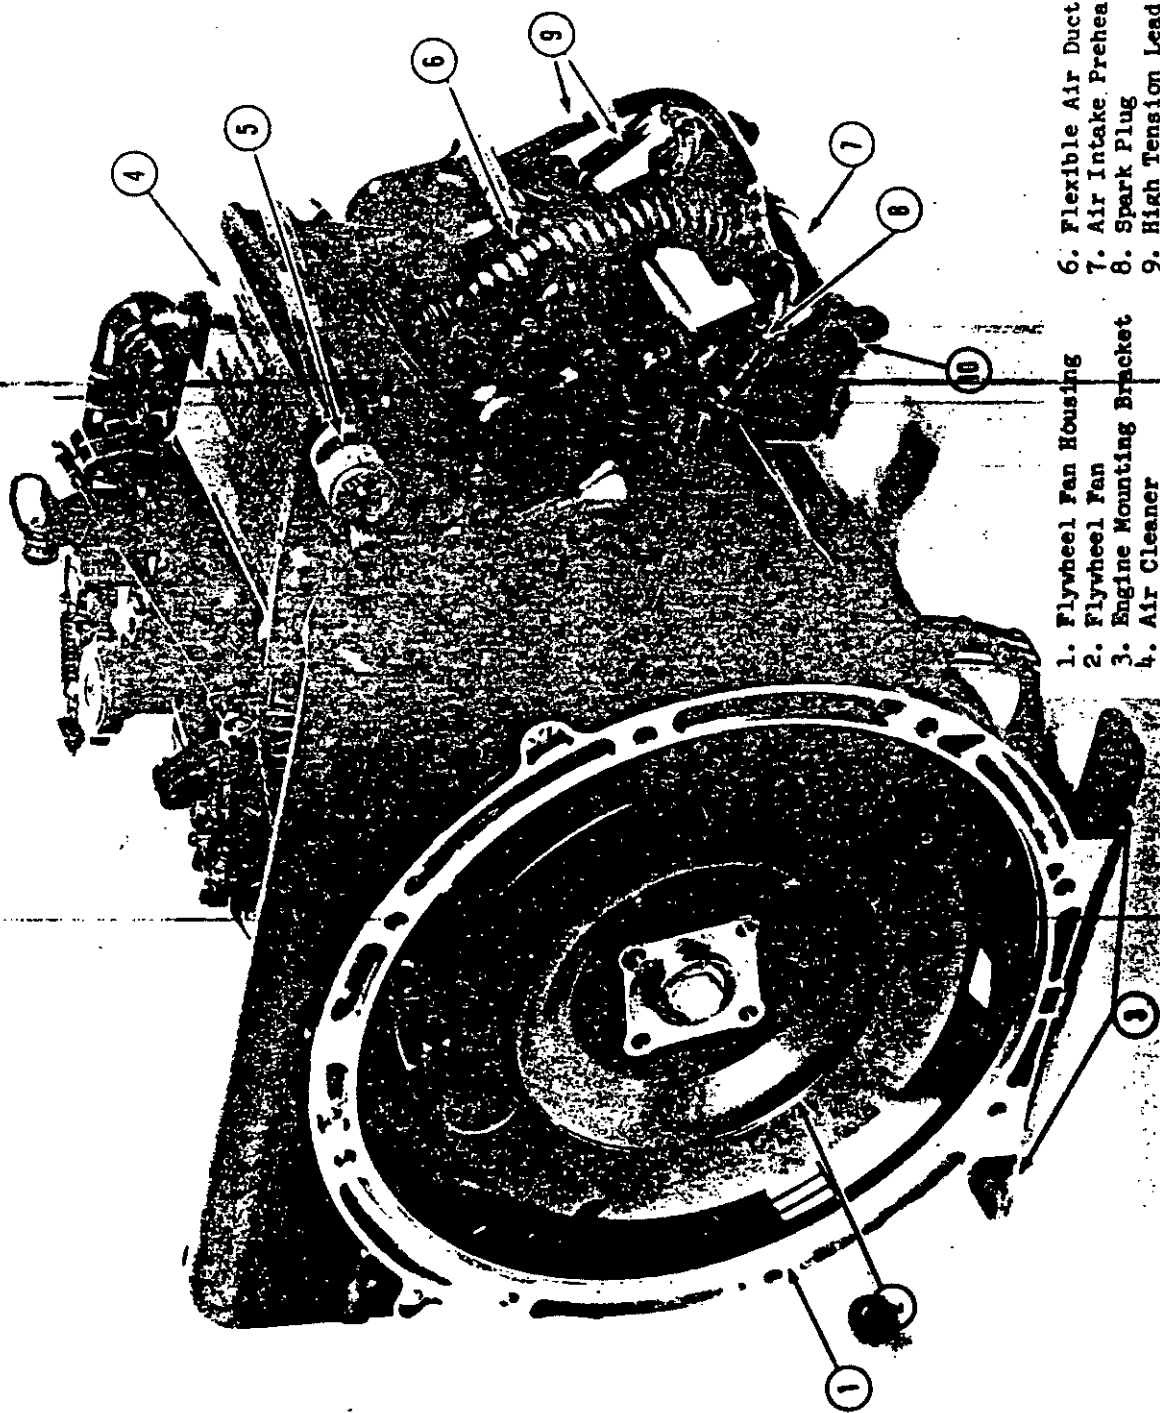

- 1. Flywheel Fan Housing
- 2. Flywheel Fan
- 3. Engine Mounting Bracket
- 4. Air Cleaner
- 5. Air Cleaner Restriction Indicator
- 6. Flexible Air Duct
- 7. Air Intake Preheater
- 8. Spark Plug
- 9. High Tension Lead
- 10. Exhaust Manifold


FIGURE 1. MODEL 4A032-II MILITARY STANDARD ENGINE DRIVE END

X-1746

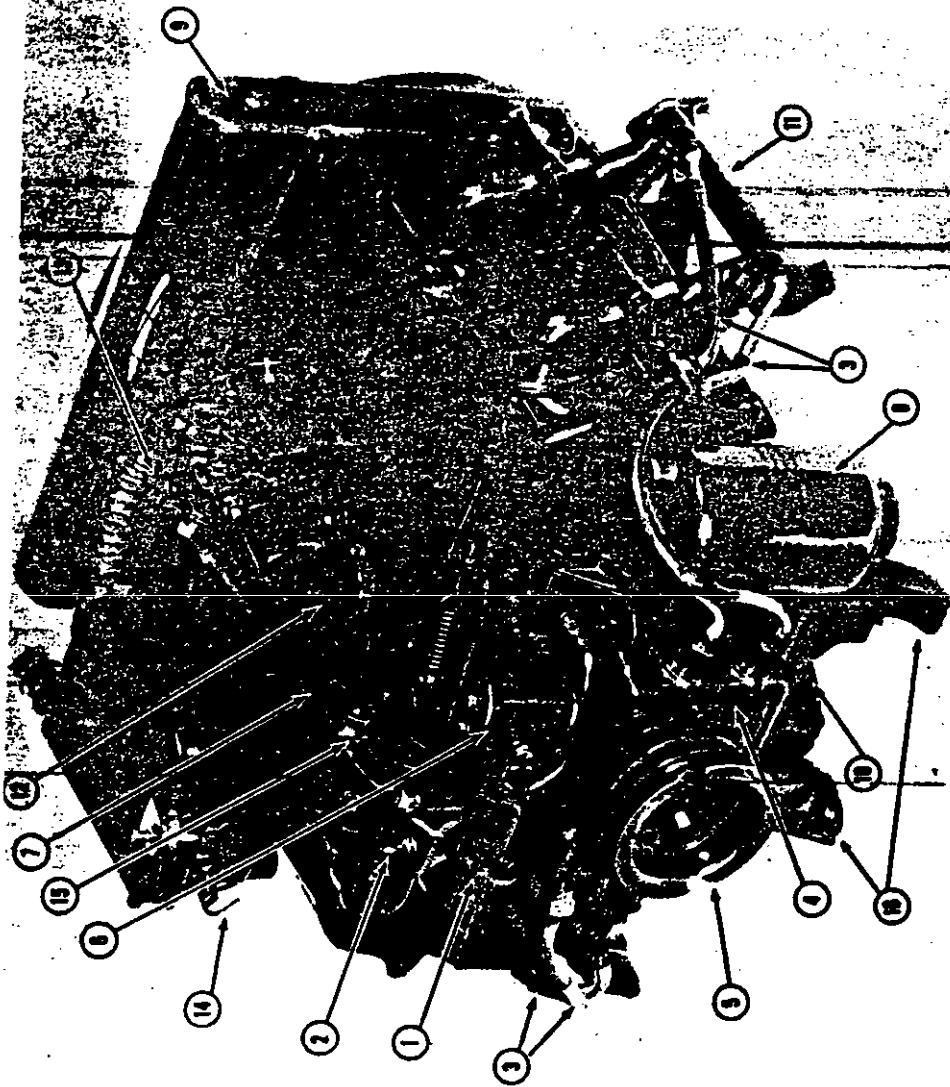

- |                           |                                     |
|---------------------------|-------------------------------------|
| 1. Breaker Points Housing | 9. Winterisation Air Control Barrod |
| 2. Ignition Switch        | 10. Drain Plug                      |
| 3. High Tension Leads     | 11. Exhaust Manifold                |
| 4. Coil Cover             | 12. Oil Fill Tube and Dip Stick     |
| 5. Rope Starter Pulley    | 13. Choke Lever                     |
| 6. Governor               | 14. Air Cleaner Selector Lever      |
| 7. Governor Control Rod   | 15. Manual Throttle Control         |
| 8. Oil Filter             | 16. Mounting Brackets               |

FIGURE 2. MODEL 4A032-11 MILITARY STANDARD ENGINE ACCESSORY END

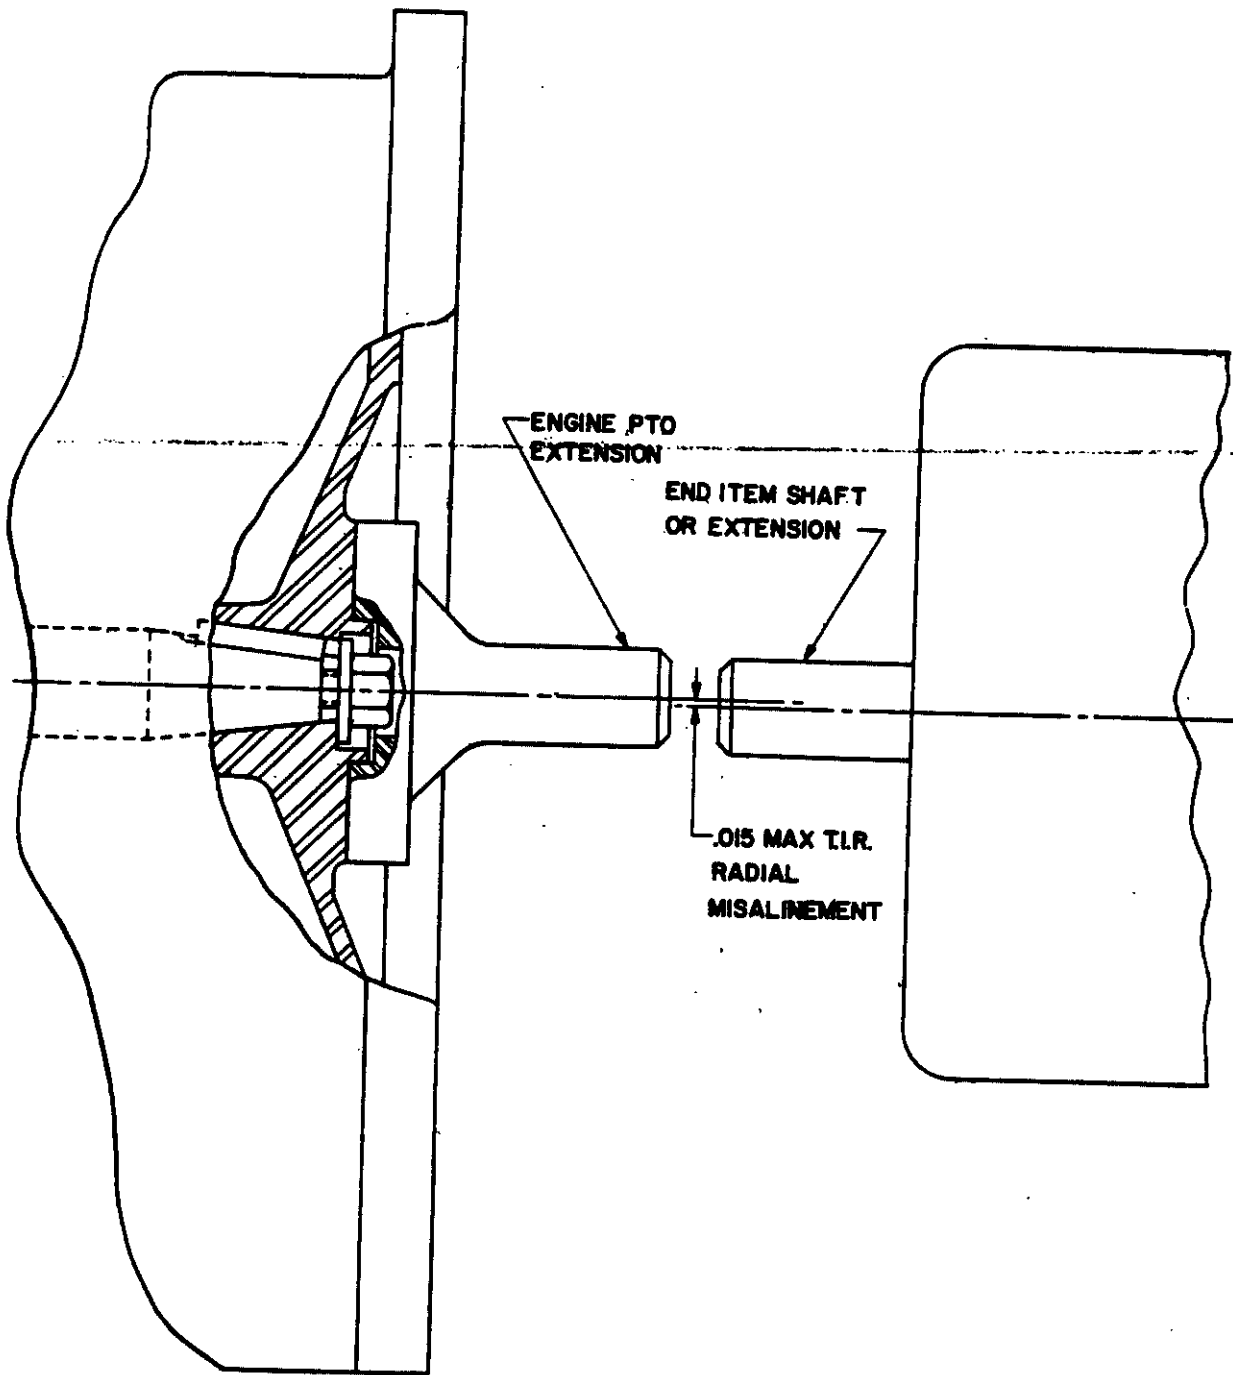

**FIGURE 17**  
**SHAFT ALIGNMENT METHOD**  
**(FLEXIBLE COUPLING)**

**X-1748**

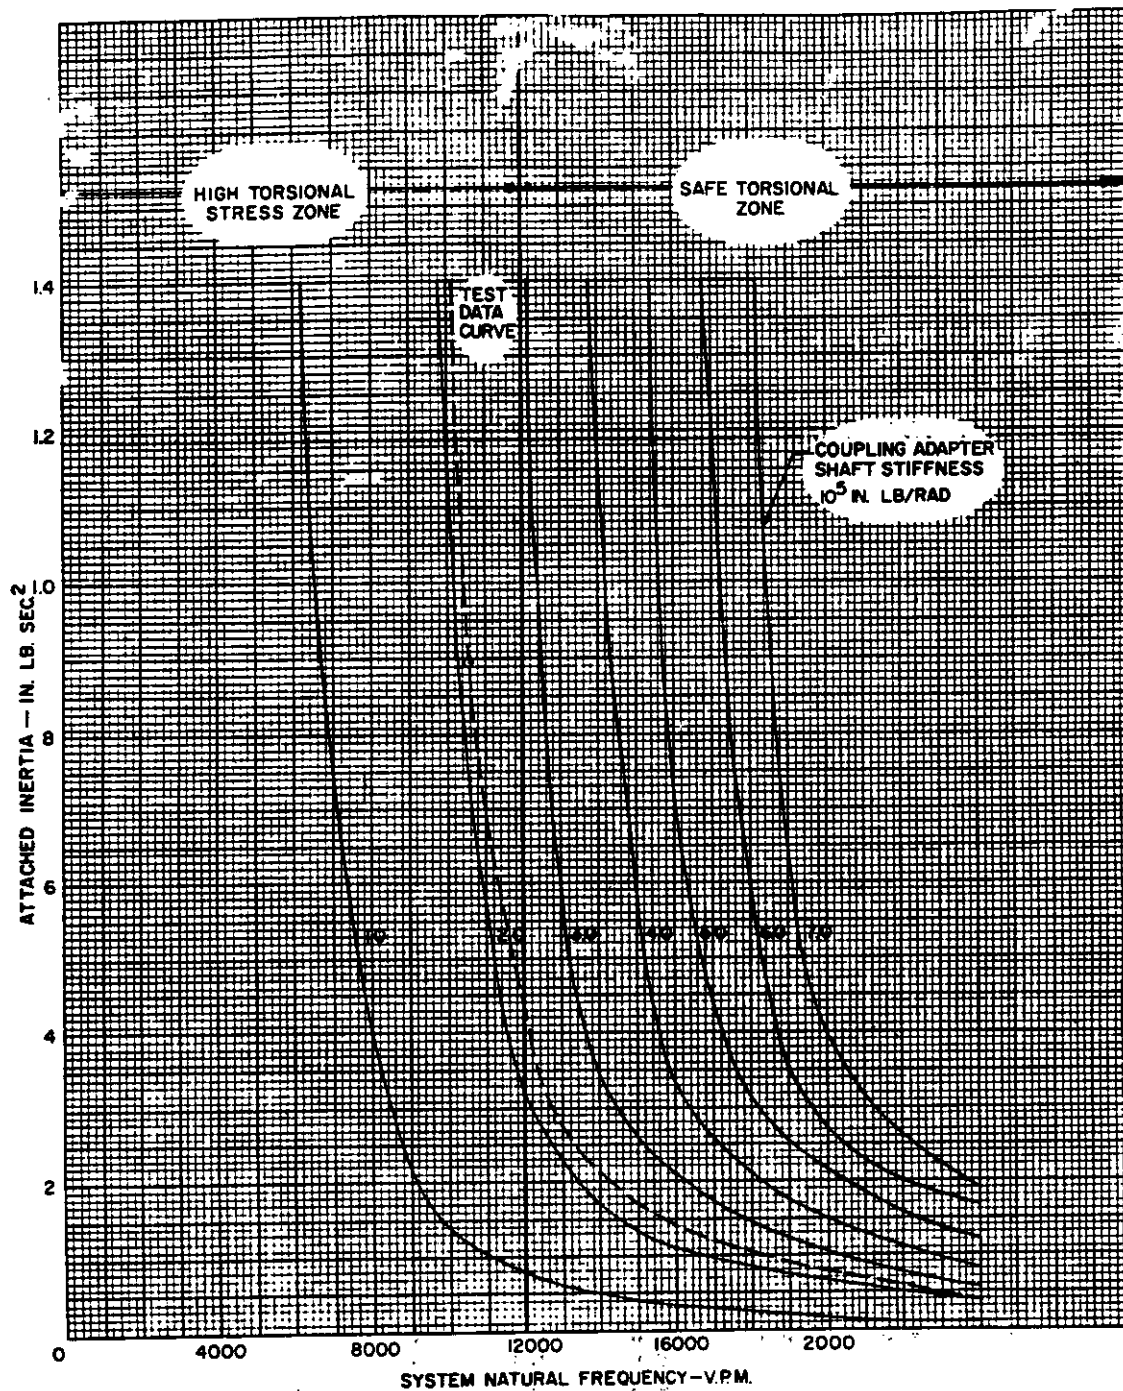


FIG. 18  
TORSIONAL TUNING CURVES FOR DIRECT COUPLED END ITEM  
(FOR ENGINE SPEED FROM 2880 TO 4320 R.P.M.)

X-1848

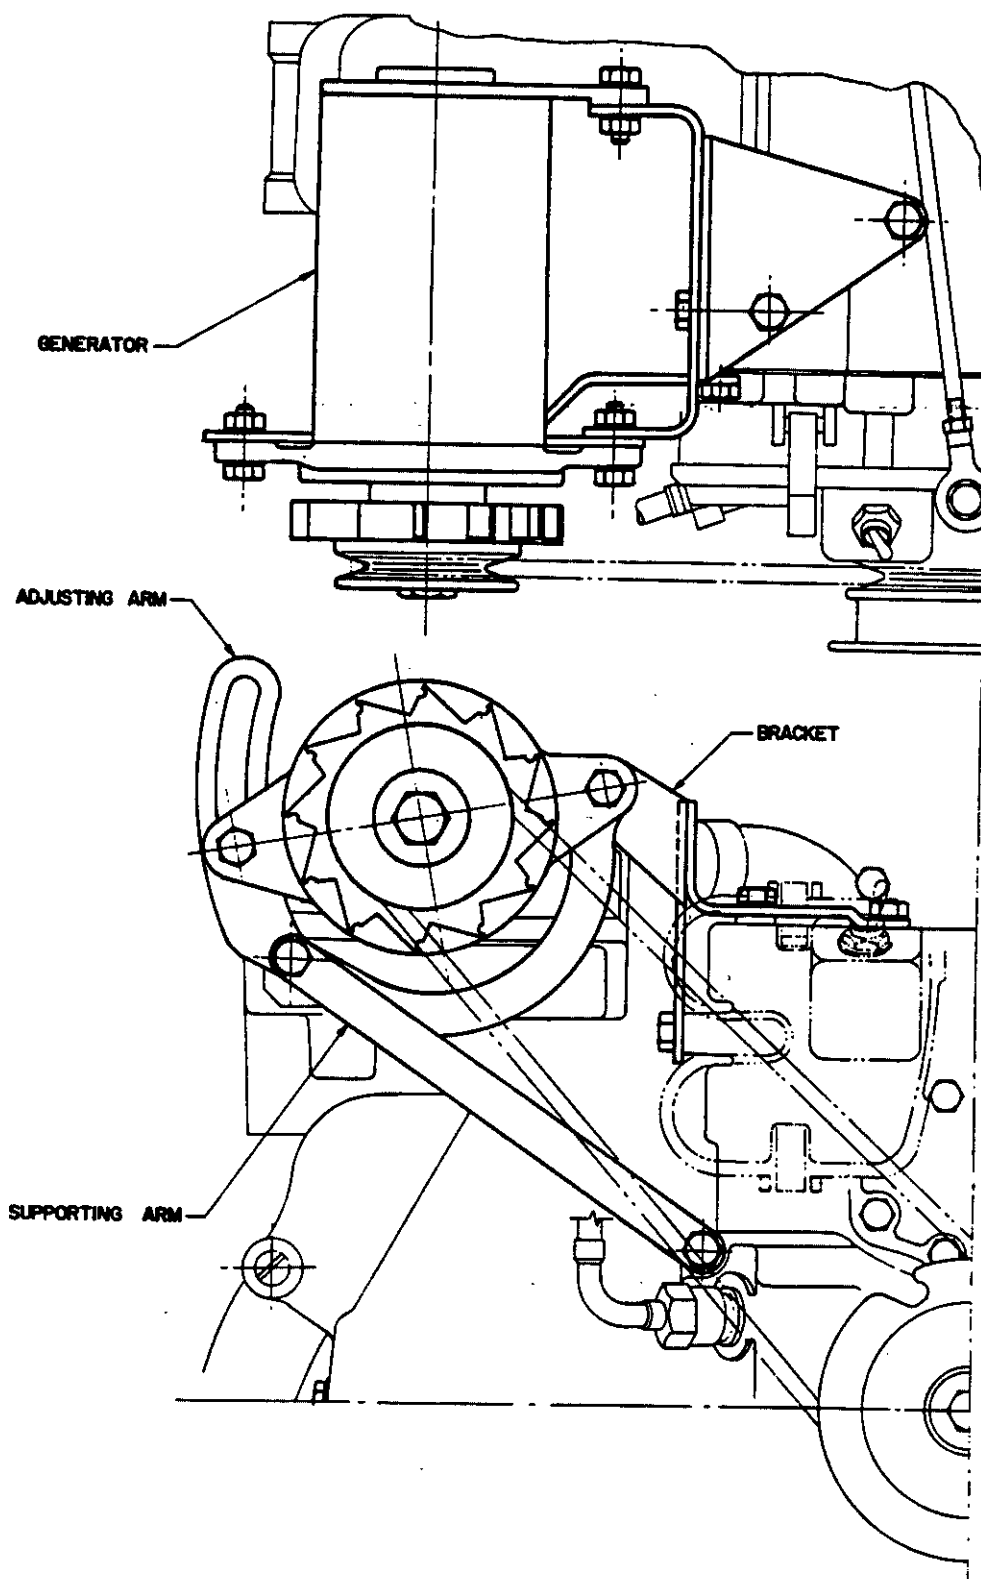


FIGURE 23  
TYPICAL MOUNTING FOR MILITARY STANDARD GENERATOR

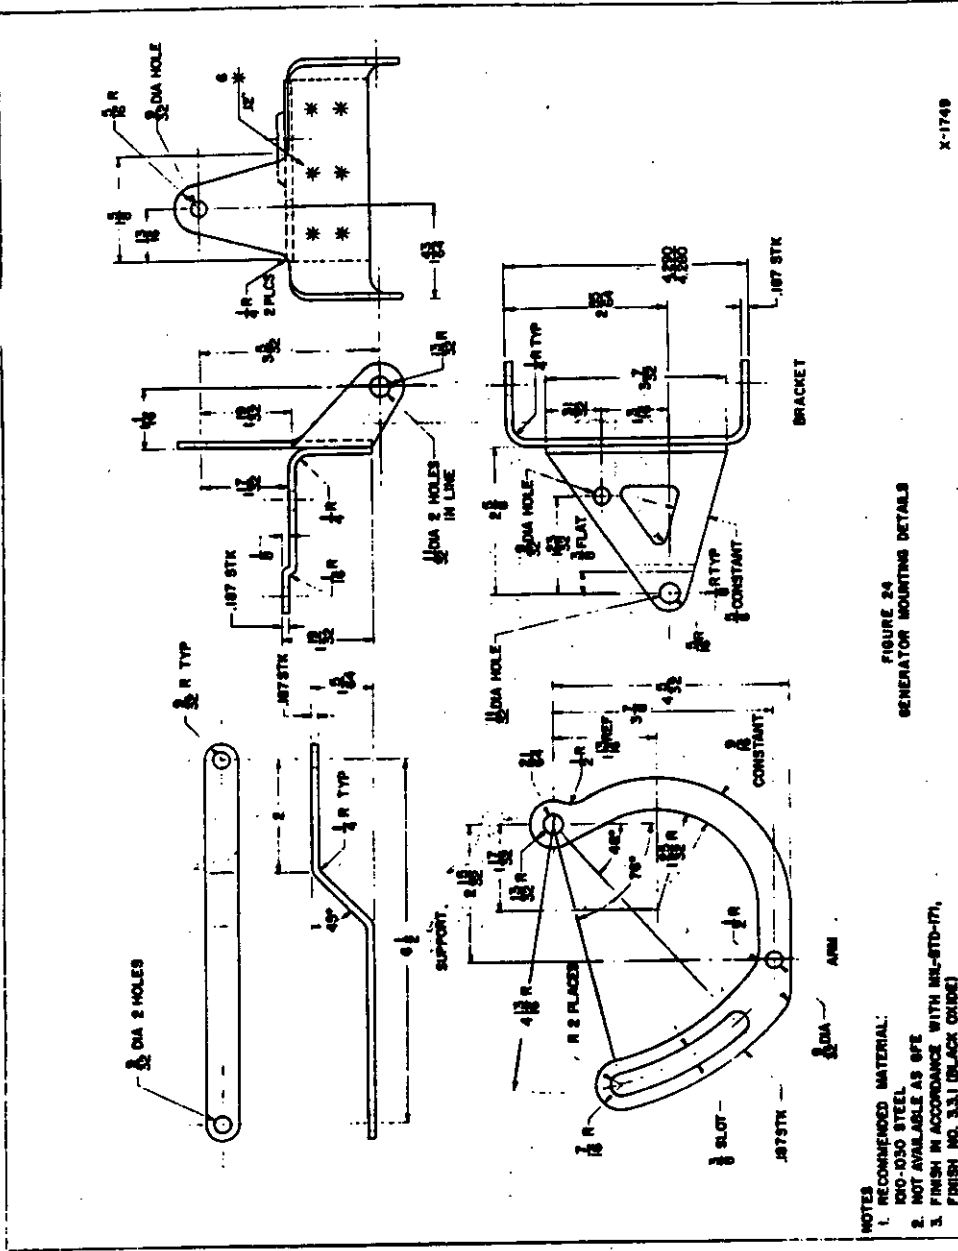


FIGURE 24  
GENERATOR MOUNTING DETAILS

- NOTES
1. RECOMMENDED MATERIAL: 100-1050 STEEL
  2. NOT AVAILABLE AS 87E
  3. FINISH IN ACCORDANCE WITH MIL-STD-17, FINISH NO. 3.3.1 (BLACK ORIDE)

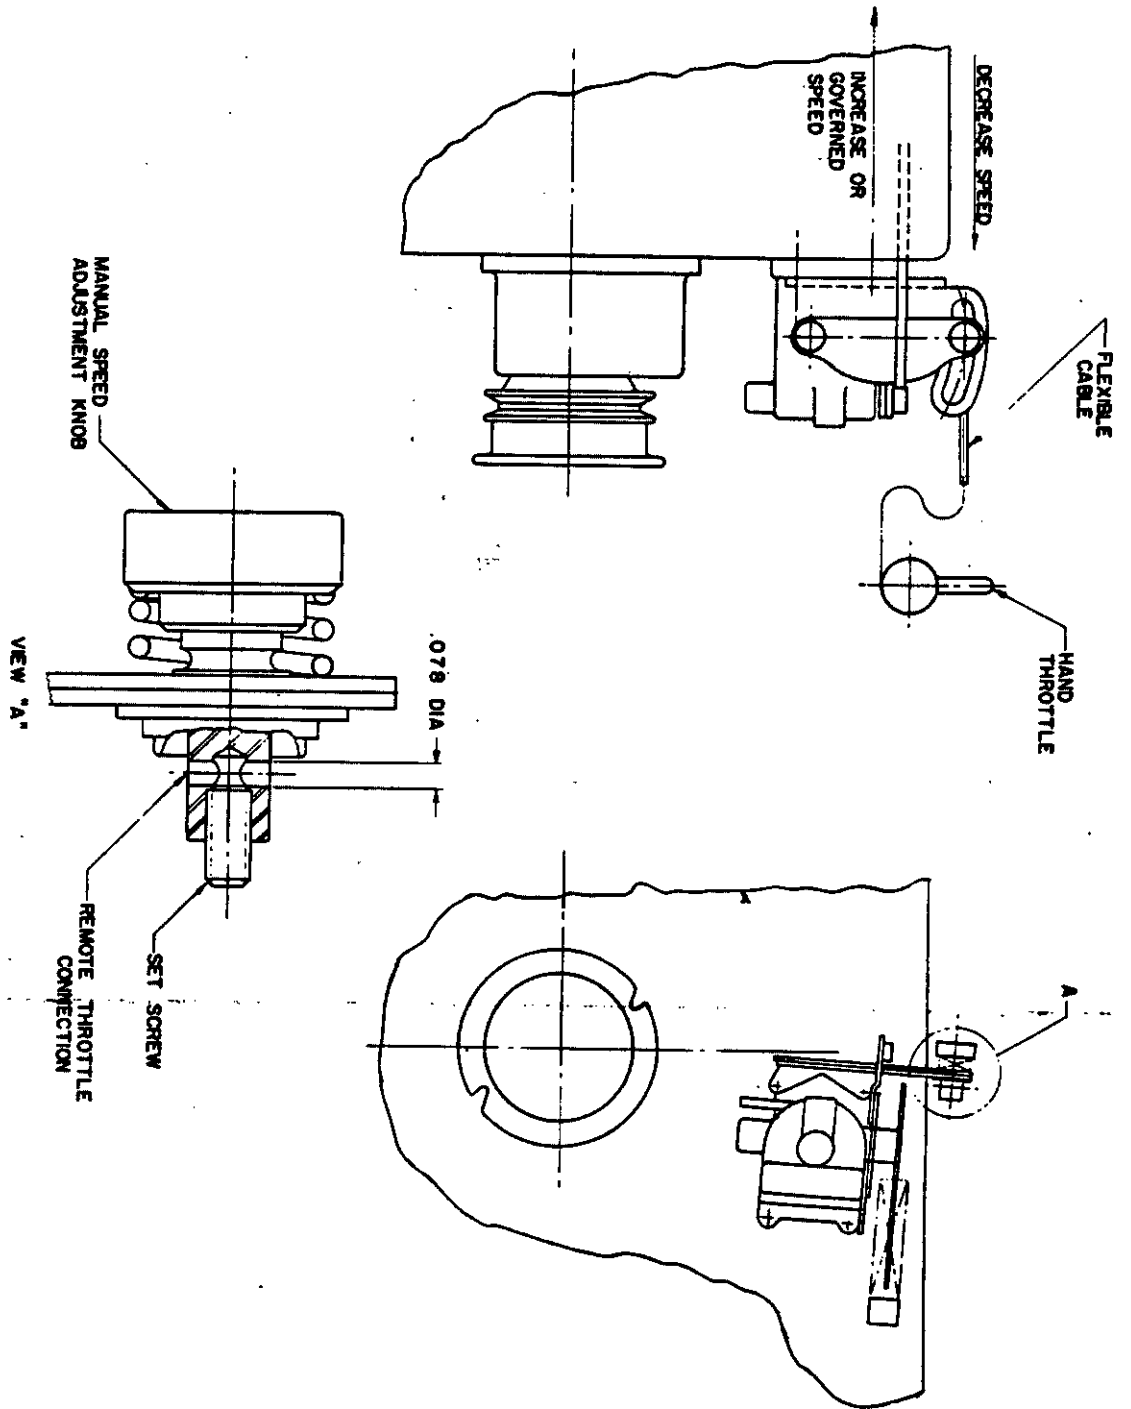


FIGURE 26  
MANUAL THROTTLE CONTROL

X-11750

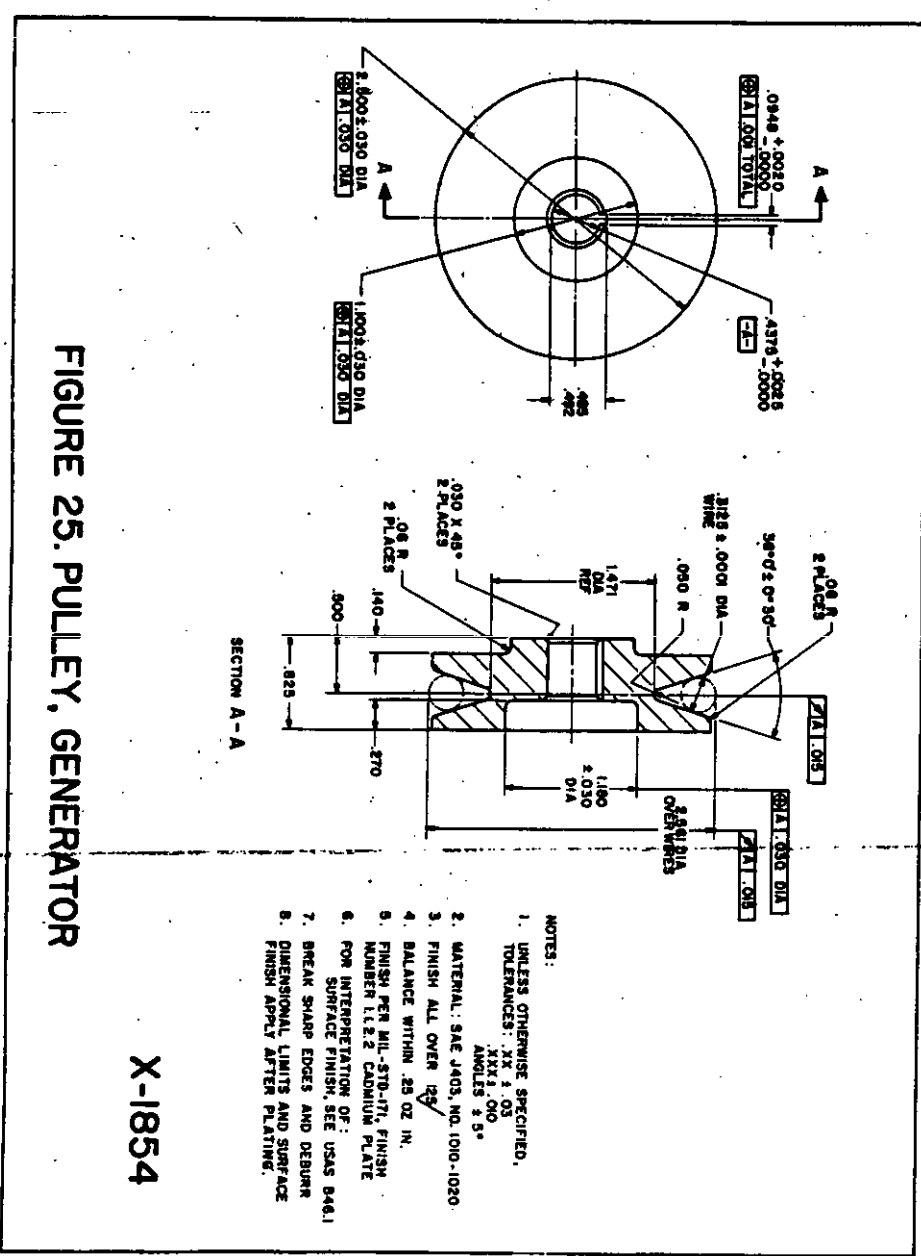


FIGURE 25. PULLEY, GENERATOR

X-1854

- NOTES:
1. UNLESS OTHERWISE SPECIFIED, TOLERANCES: XX ± .03, XXX ± .00
  2. MATERIAL: SAE J403, NO. 1010-1020
  3. FINISH ALL OVER 125
  4. BALANCE WITHIN .25 OZ IN.
  5. FINISH PER MIL-STD-171, FINISH NUMBER 1.R.2 CADMIUM PLATE
  6. FOR INTERPRETATION OF SURFACE FINISH SEE USAS B46.1
  7. BREAK SHARP EDGES AND DEBURR
  8. DIMENSIONAL LIMITS AND SURFACE FINISH APPLY AFTER PLATING.



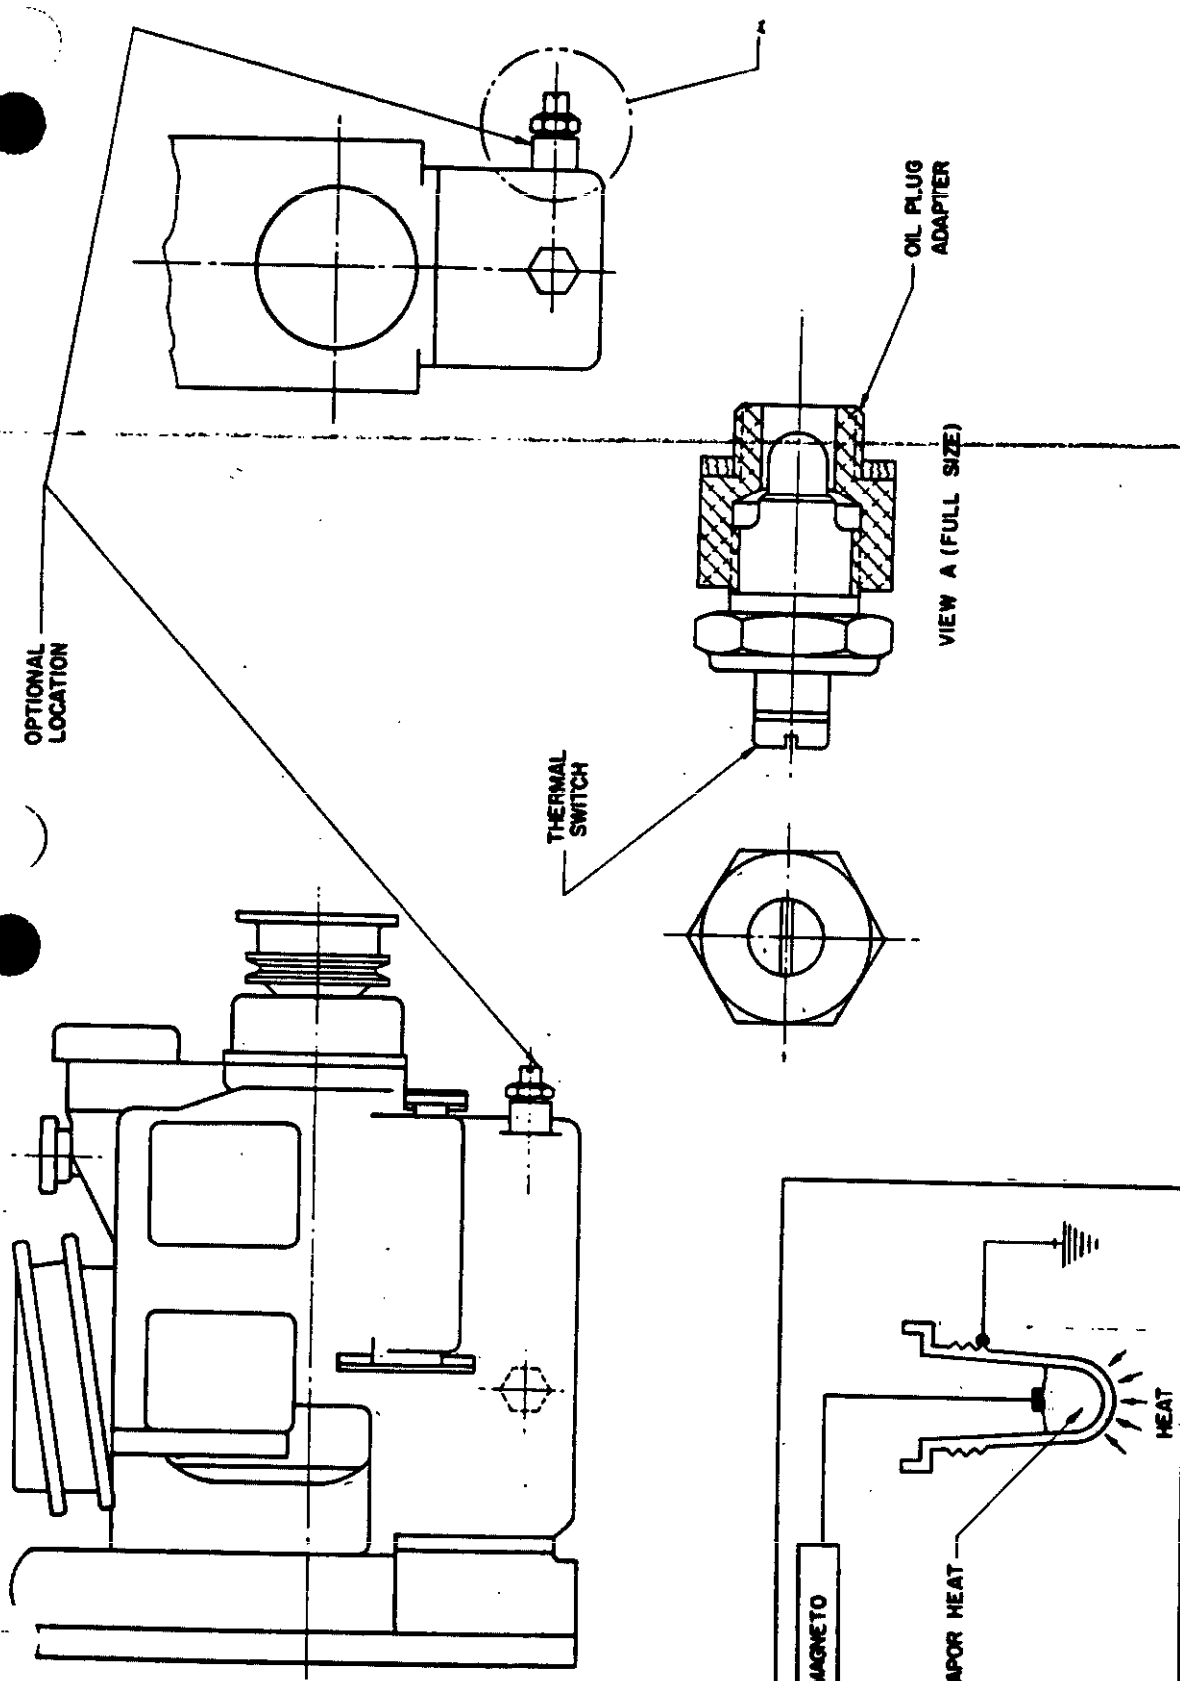


FIGURE 27  
TYPICAL HIGH OIL TEMPERATURE CONTROL INSTALLATION AND DIAGRAM  
(NOT AVAILABLE AS GME)

X-1751

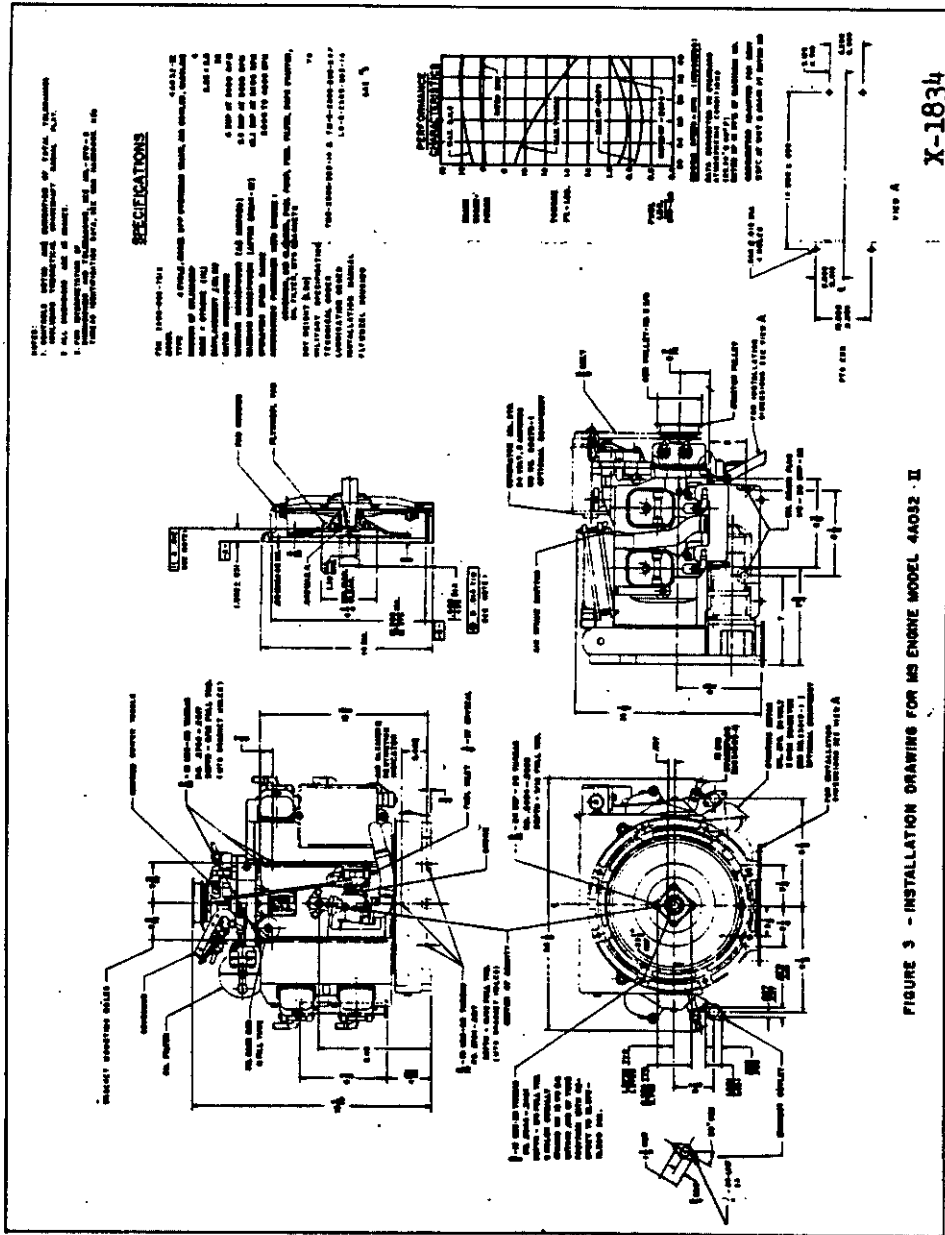

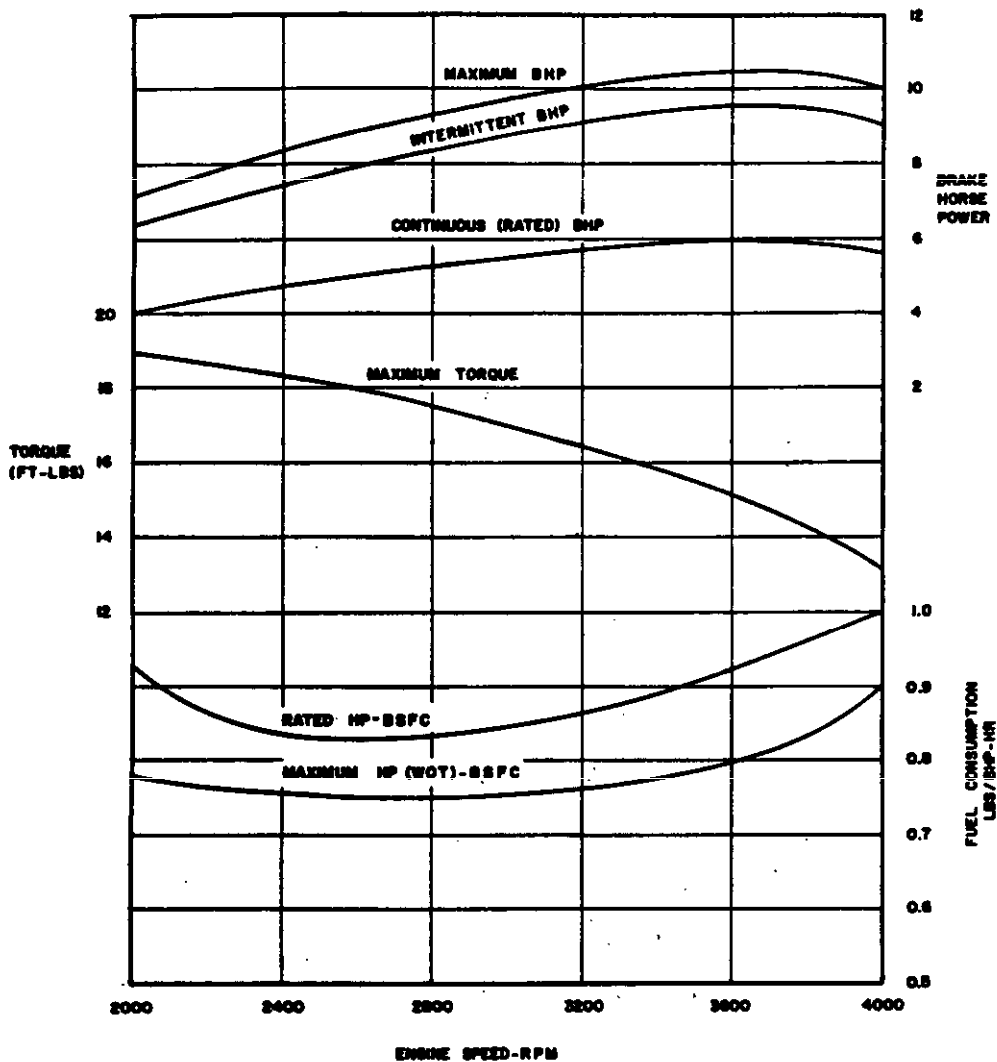

MAXIMUM BHP CURVE DEVELOPED BY LABORATORY TEST ENGINES. PRODUCTION ENGINES DEVELOP NOT LESS THAN 80% MAXIMUM BHP WHEN SHIPPED, AND NOT LESS THAN 90% MAXIMUM BHP AFTER RUN-IN TO REDUCE FRICTION.

INTERMITTENT HORSEPOWER RATINGS OF EACH ENGINE IS APPROXIMATELY 80% OF MAXIMUM HORSEPOWER WHICH THE ENGINE WILL PRODUCE FOR SHORT PERIODS OF CONTINUOUS OPERATION.

CONTINUOUS HORSEPOWER RATINGS OF EACH ENGINE IS APPROXIMATELY 67% OF MAXIMUM HORSEPOWER RATINGS AT ANY GIVEN SPEED IN OPERATING SPEED RANGE. THIS POWER RESERVE PROVIDES AGAINST LOSSES RESULTING FROM ALTITUDE AND HIGH TEMPERATURE OPERATION, NORMAL WEAR AND MANUFACTURING TOLERANCES.

DATA CORRECTED TO STANDARD ATMOSPHERIC CONDITIONS (29.92" HG & 80° F)

FIGURE 4  
PERFORMANCE CHARACTERISTICS

X-1835

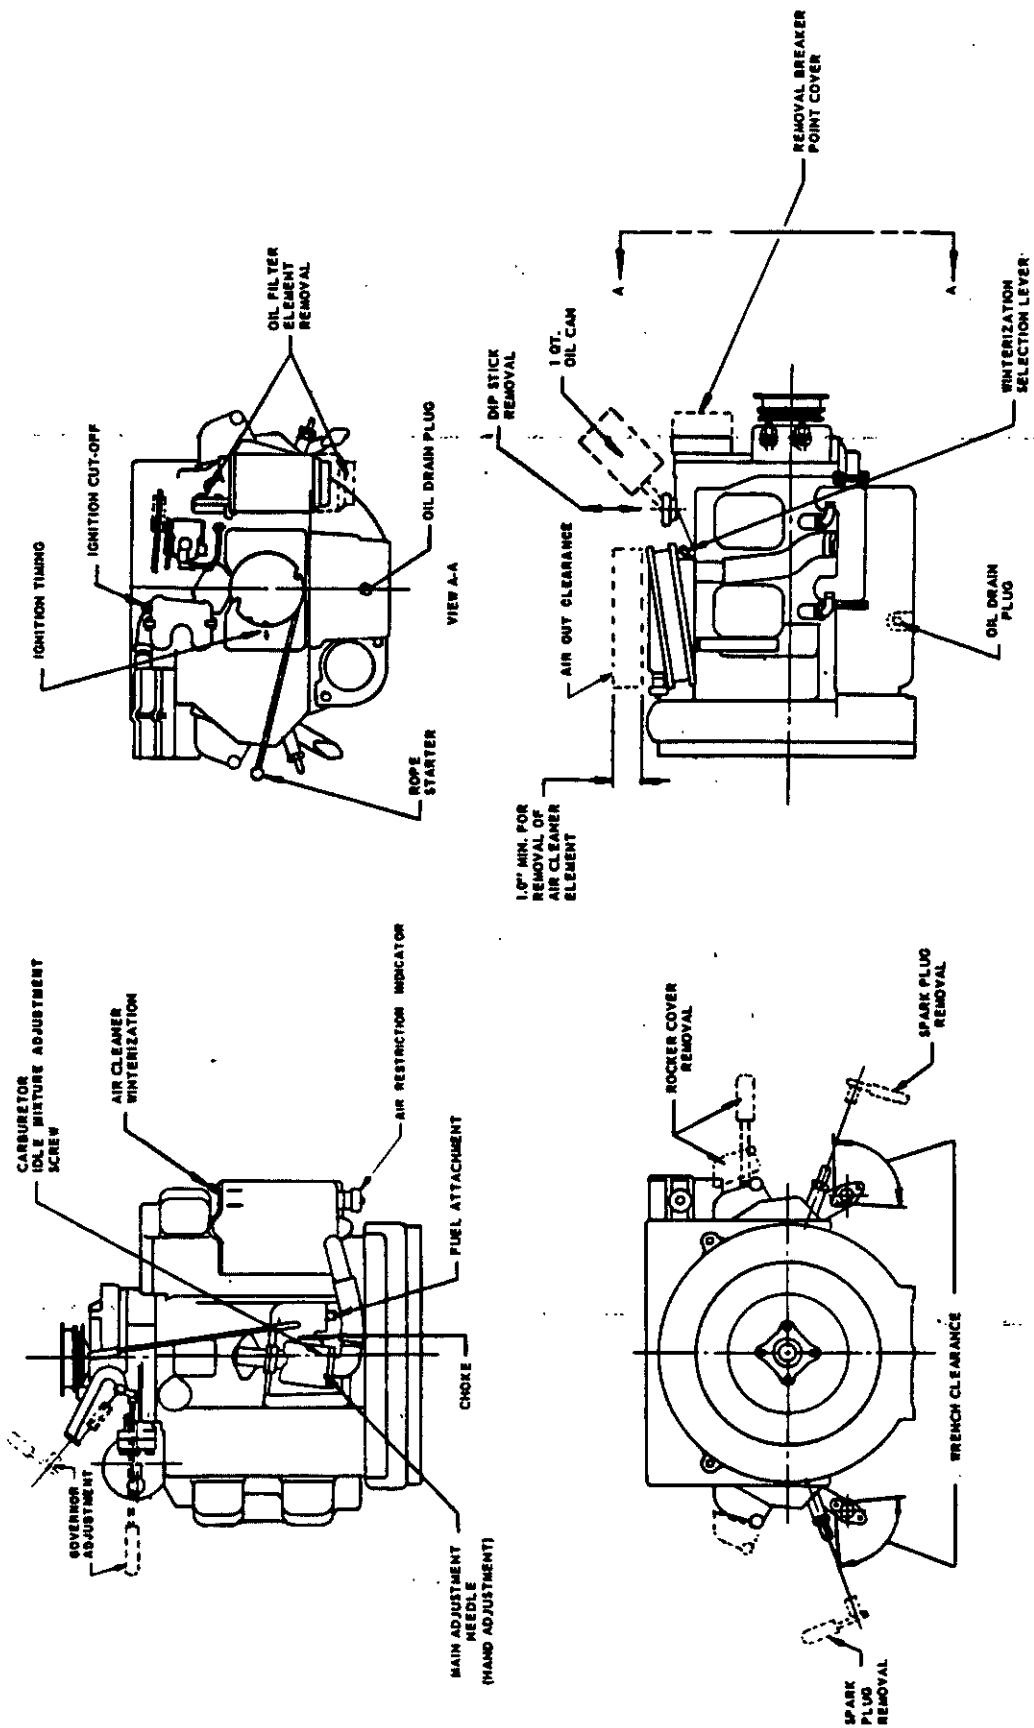


FIGURE 5. Maintenance Clearances for Model 4A032 Military Standard Engine

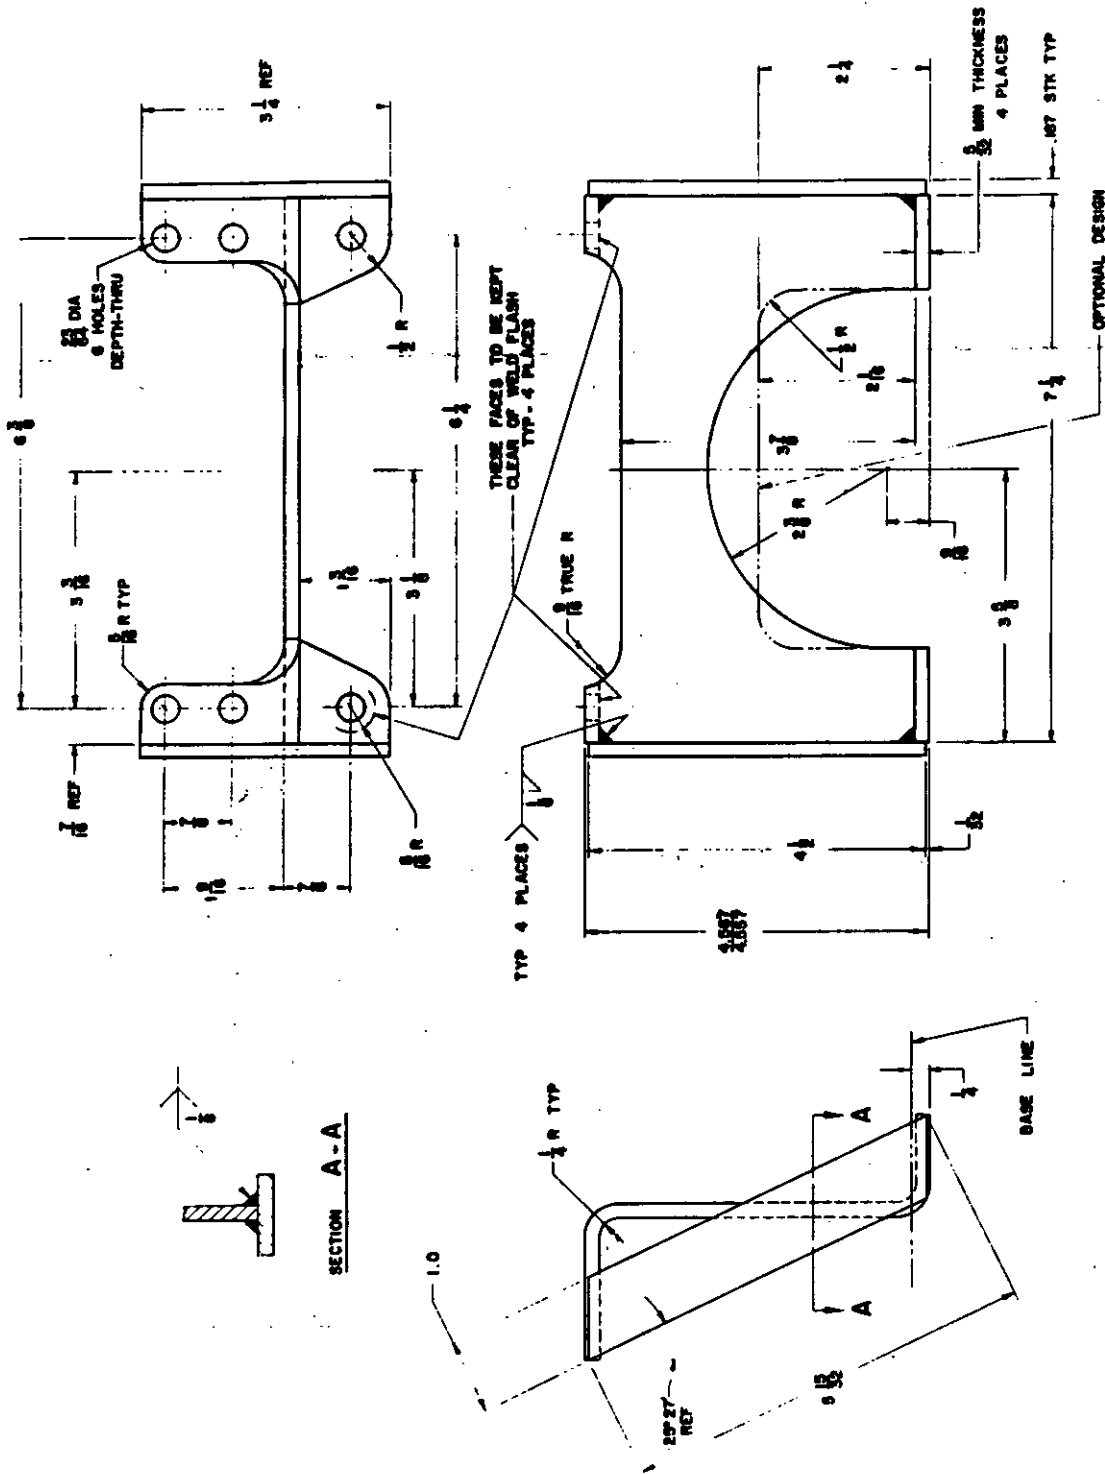


FIGURE 6  
ENGINE FRONT MOUNTING BRACKET  
ON THE 4A032-II MODEL

X-1837

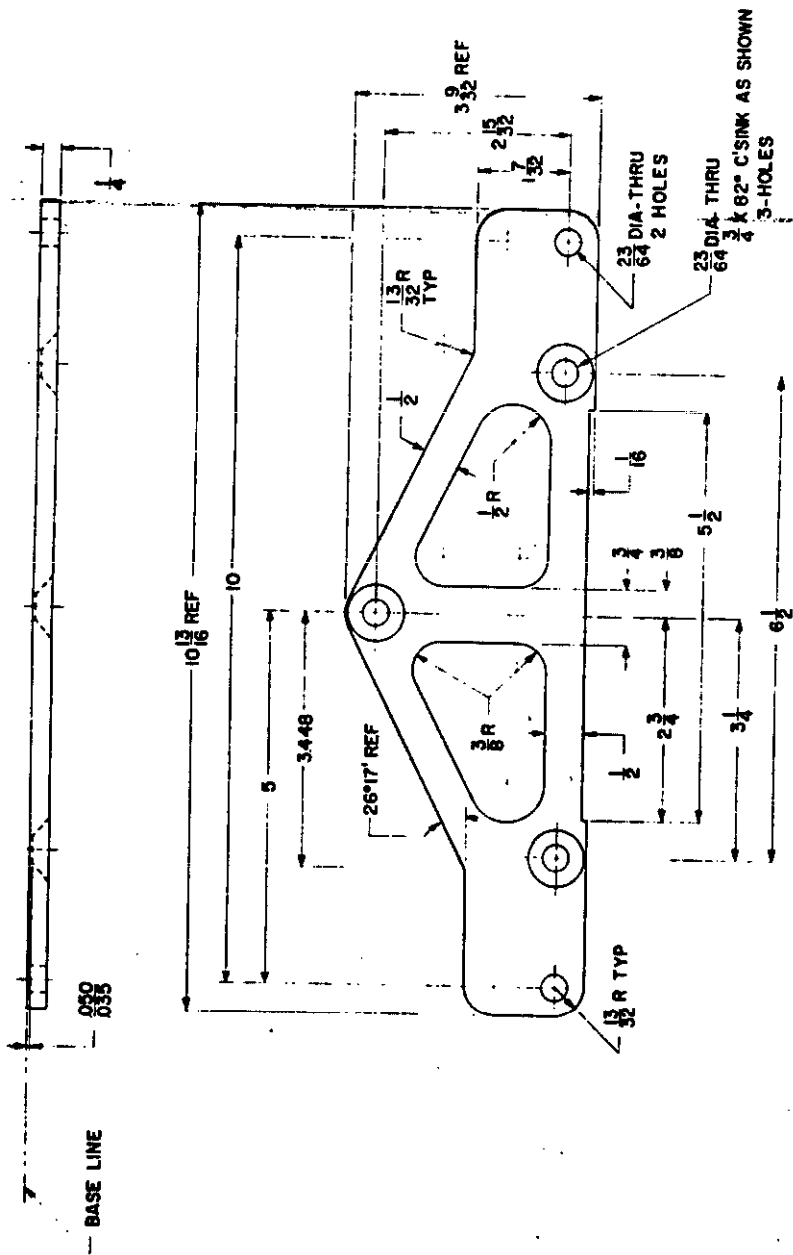


FIGURE 7  
ENGINE REAR MOUNTING BRACKET  
ON THE 4A032-II MODEL

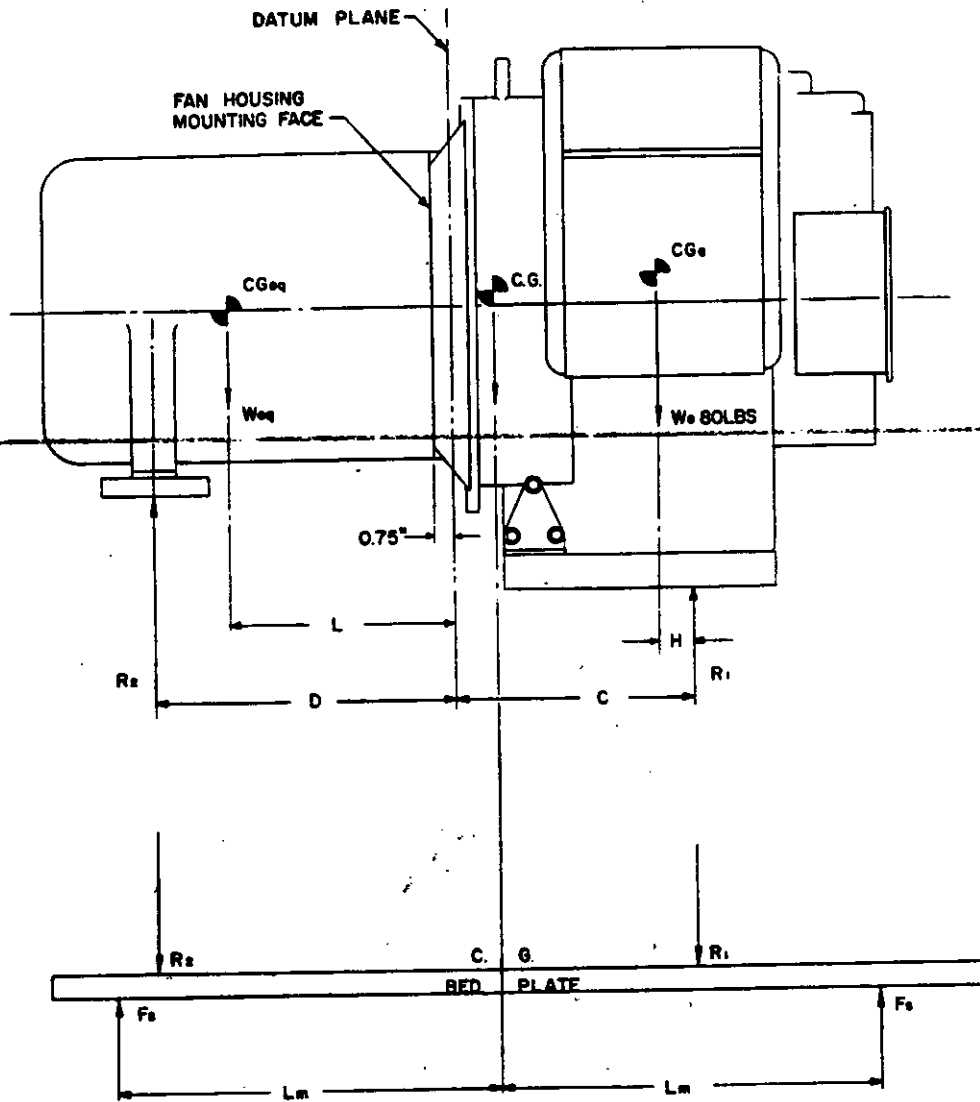


FIGURE 8  
BEAM MOUNTING INSTALLATION FOR ENGINE  
WITH DIRECT MOUNTED EQUIPMENT

X-1839

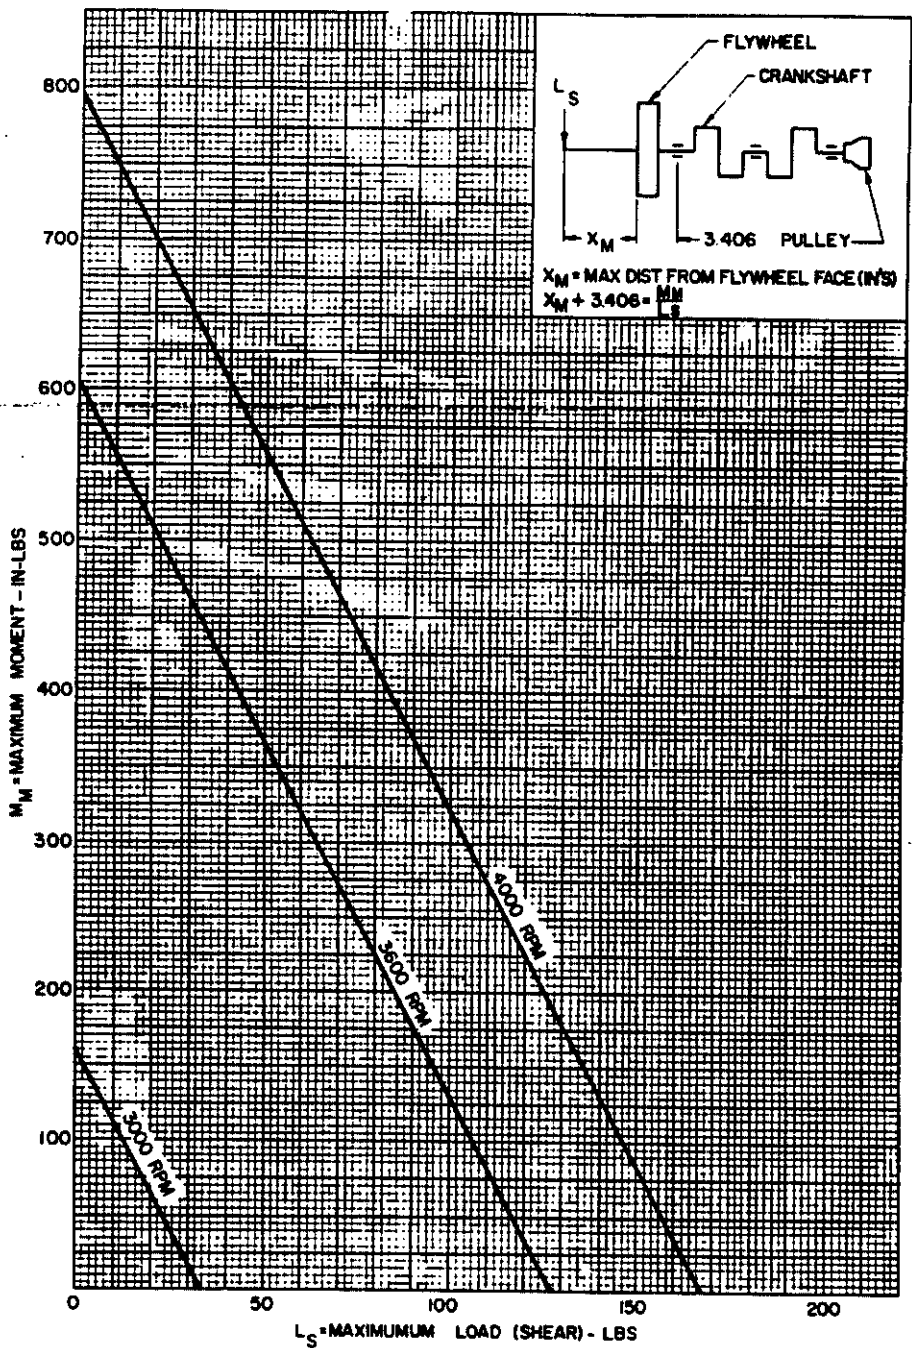


FIGURE 9  
POWER TAKE OFF END  
ALLOWABLE MOMENT & LOAD DIAGRAM

X-1840

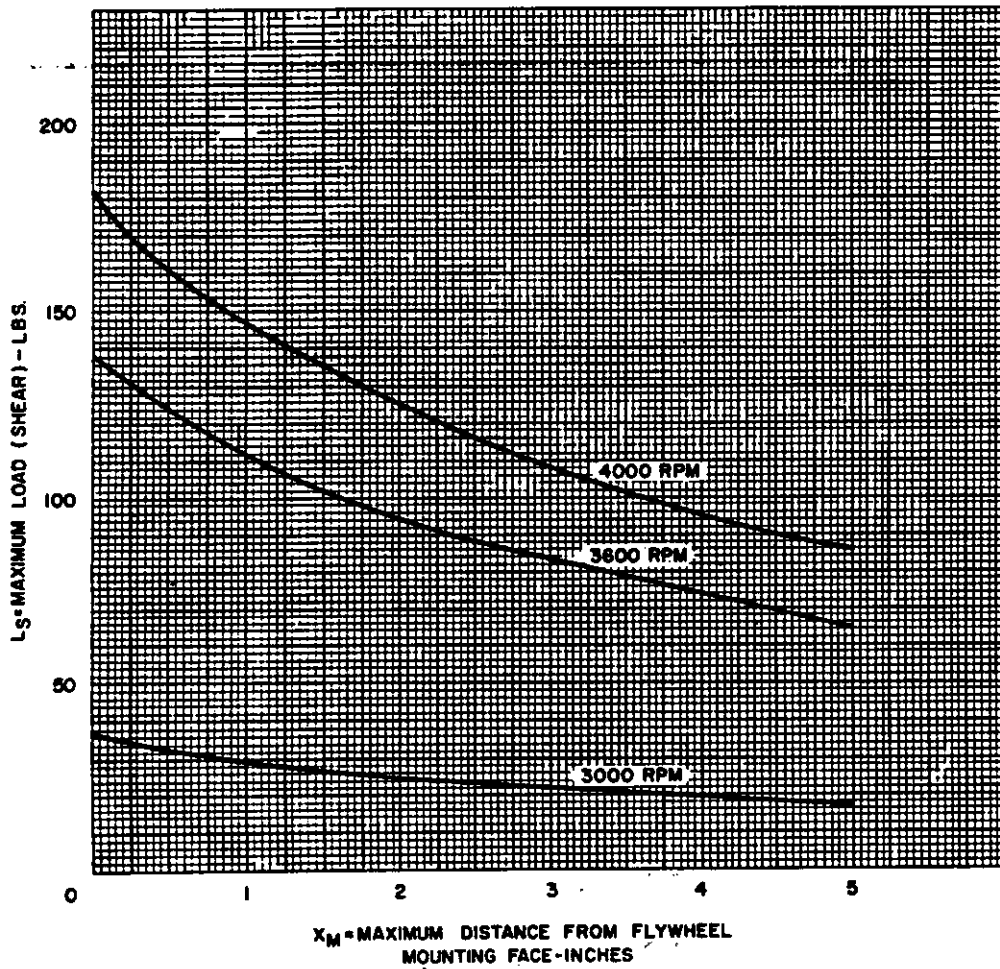


FIGURE 10  
POWER TAKE OFF END  
MAXIMUM DISTANCE FOR OVERHUNG LOADS

X-1841

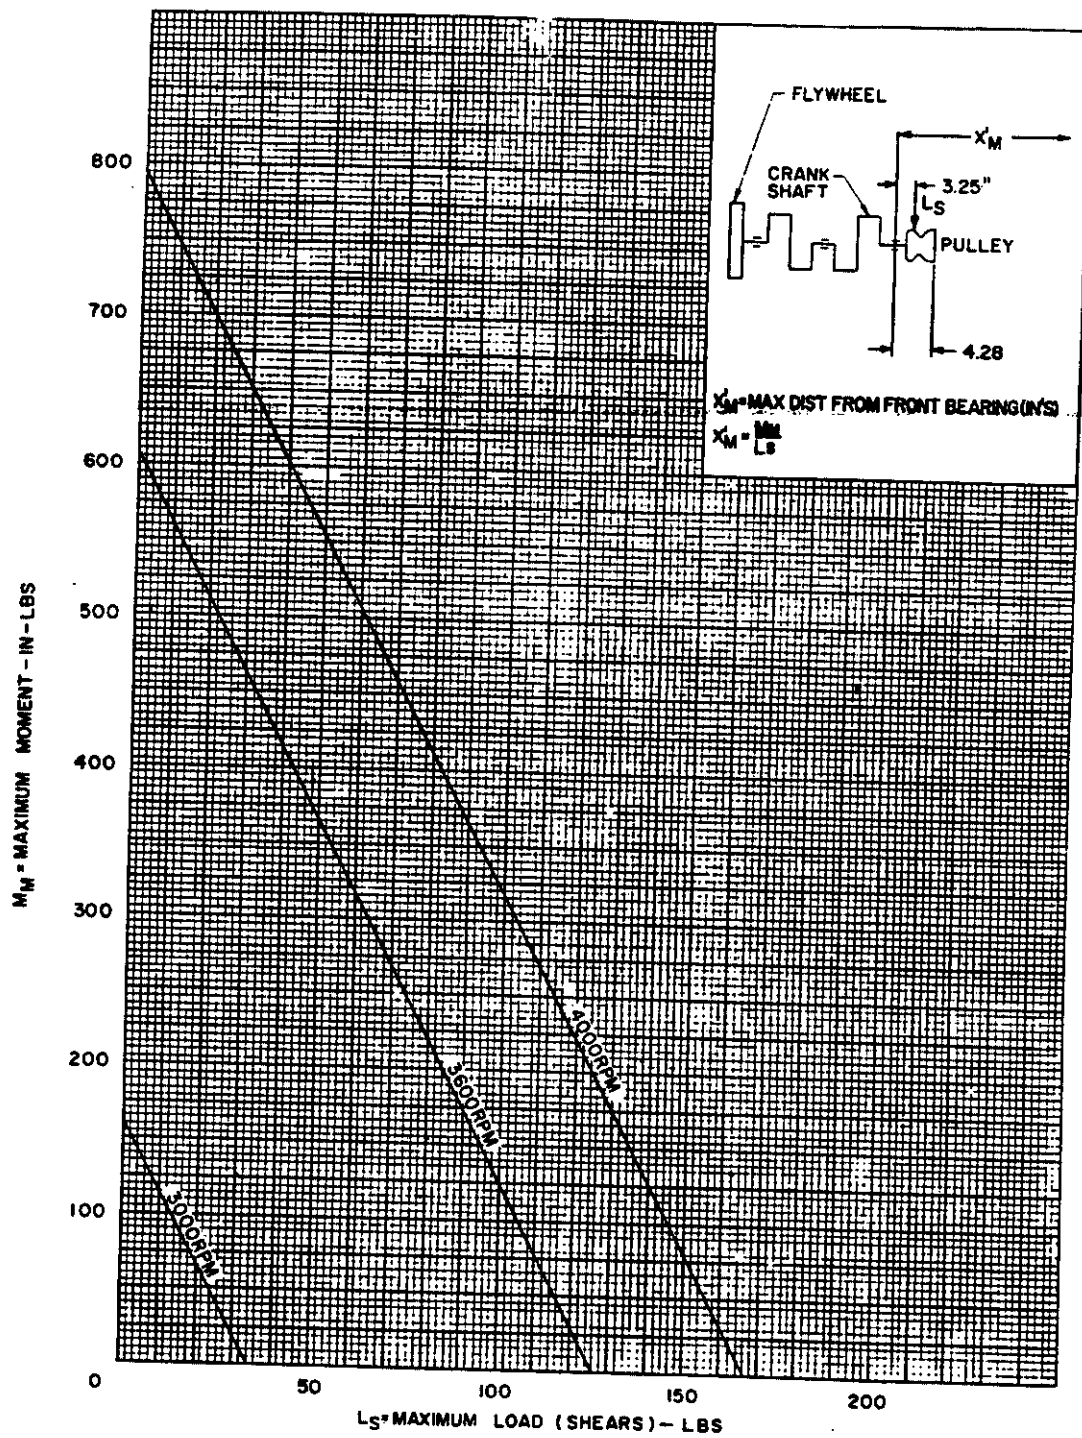


FIGURE 11  
ACCESSORY END  
ALLOWABLE MOMENT & LOAD DIAGRAM

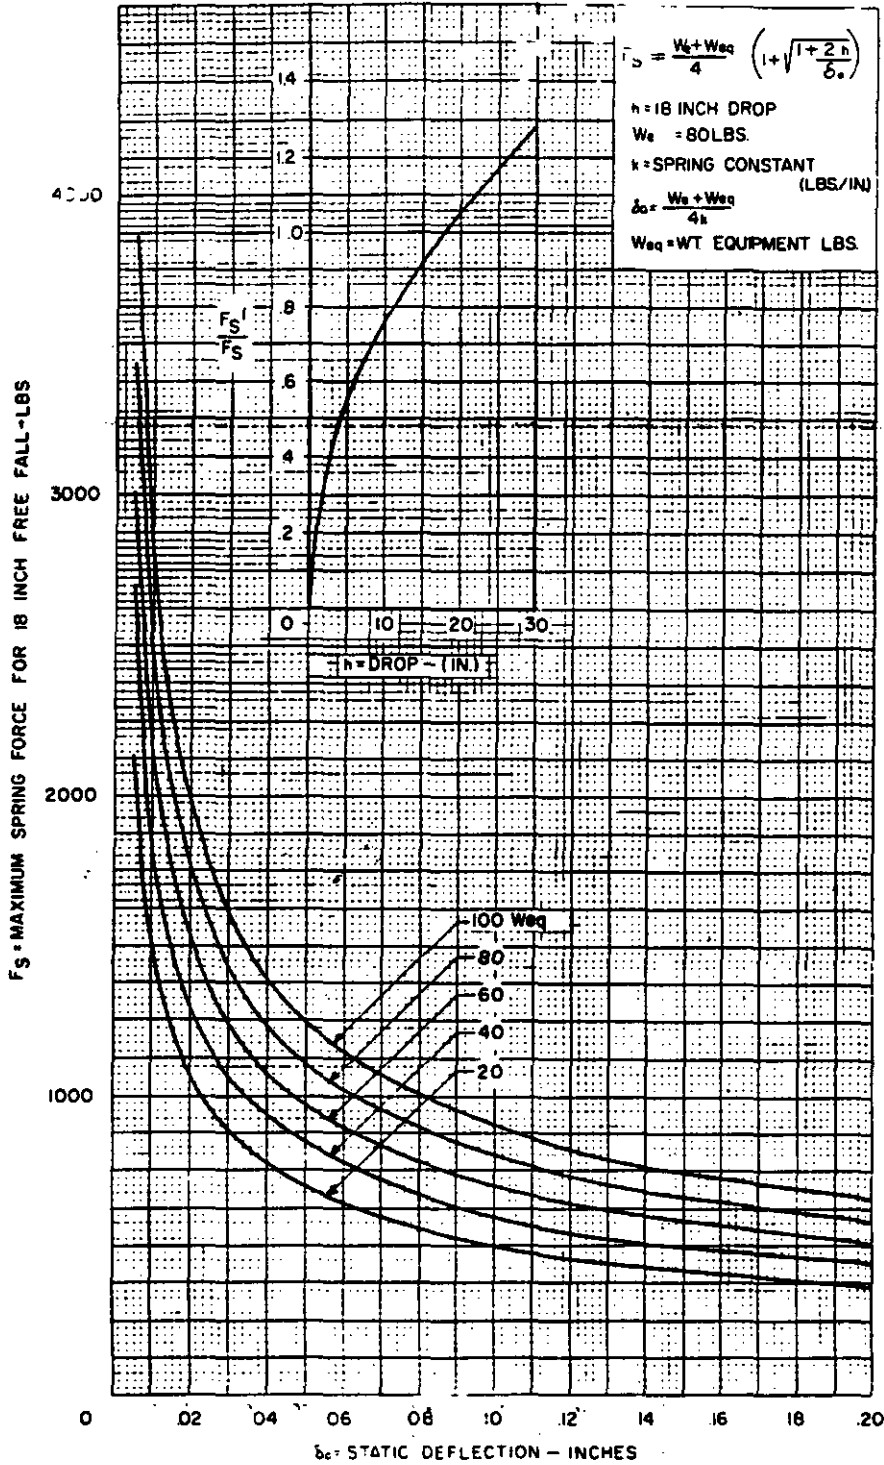


FIGURE 12  
 MAXIMUM SPRING FORCE OF VIBRATION MOUNTS  
 AS A FUNCTION OF STATIC DEFLECTION

X-1843

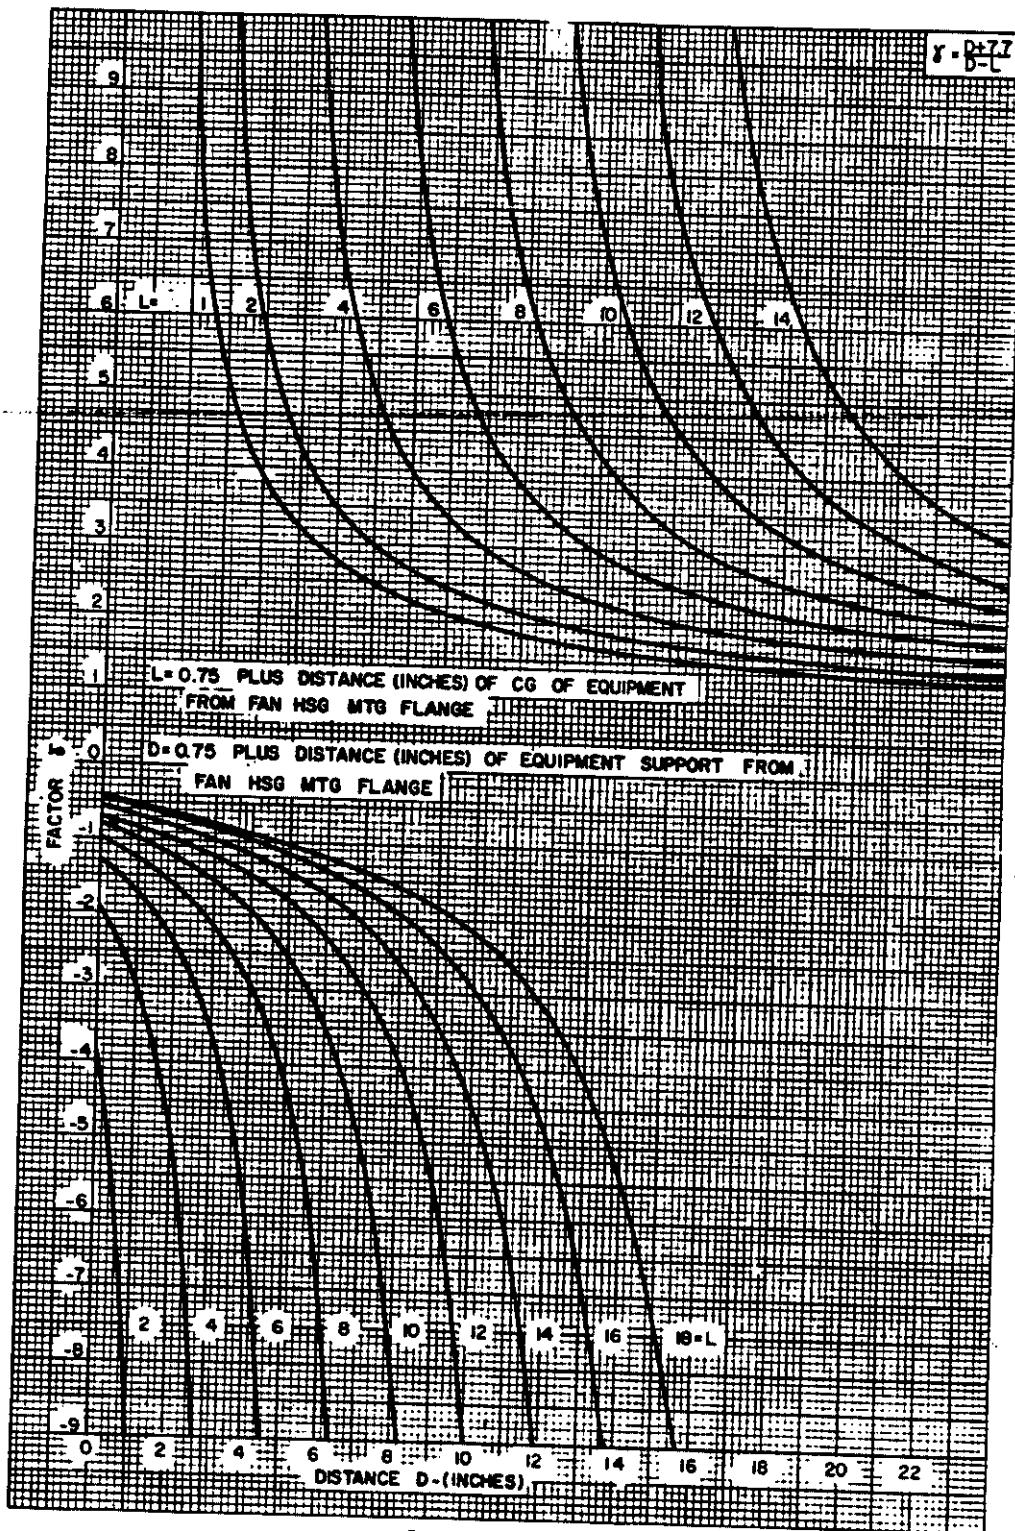


FIGURE 13  
 FACTOR I AS FUNCTION OF L AND D FOR BEAM MOUNTING WHEN H=0

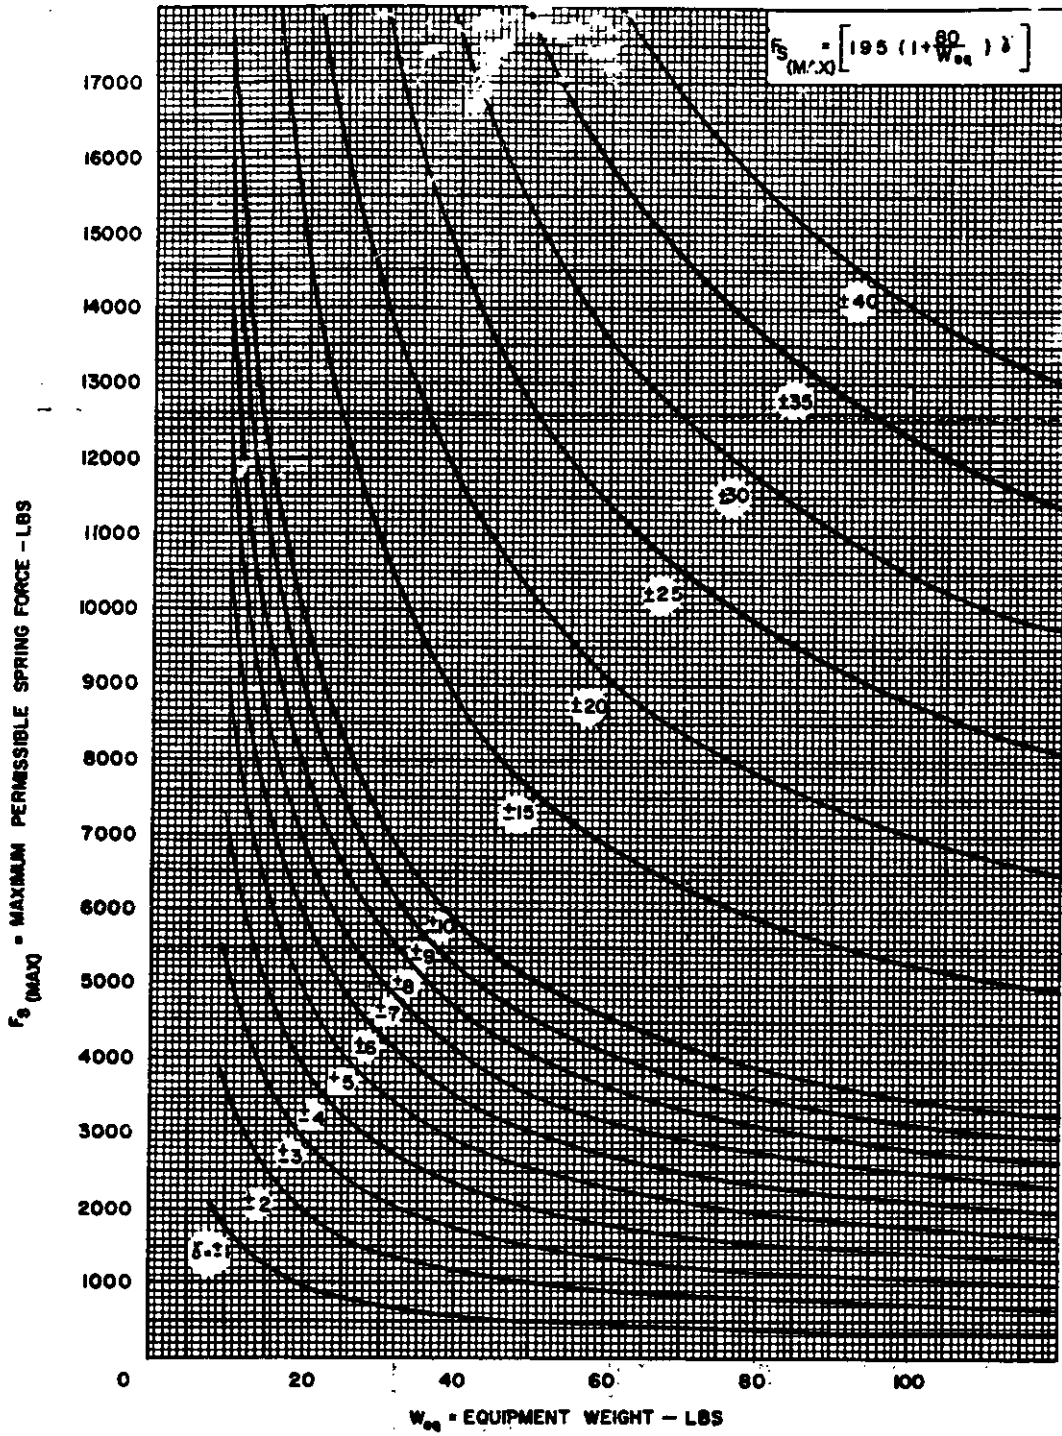


FIGURE 14  
MAXIMUM PERMISSIBLE SPRING FORCE  
(PER SPRING) FOR BEAM MOUNTING WHEN H=0


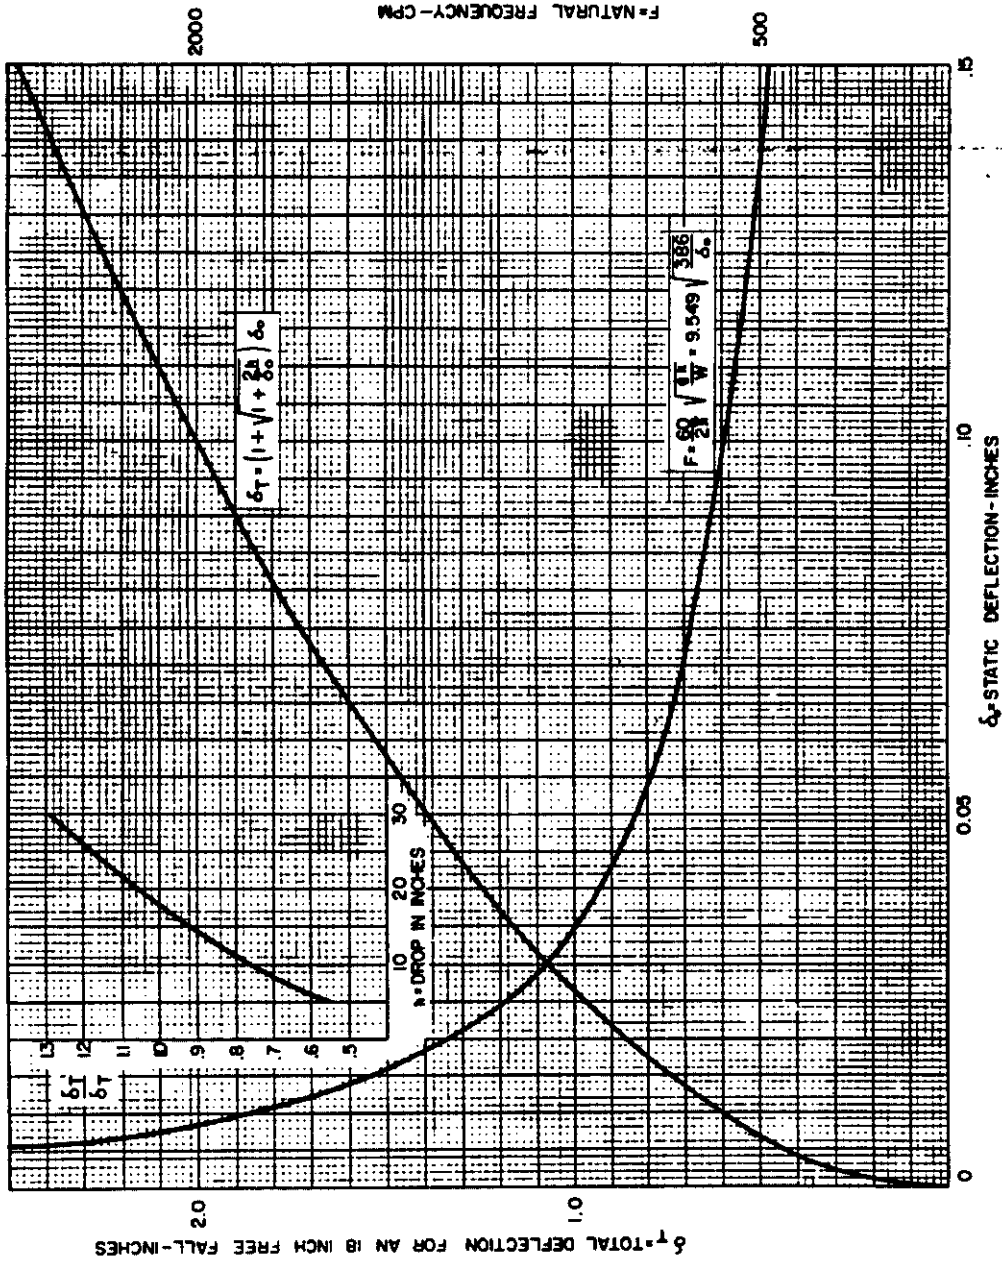


FIGURE 15  
NATURAL FREQUENCY AND TOTAL DEFLECTION  
AS A FUNCTION OF STATIC DEFLECTION

X-1846

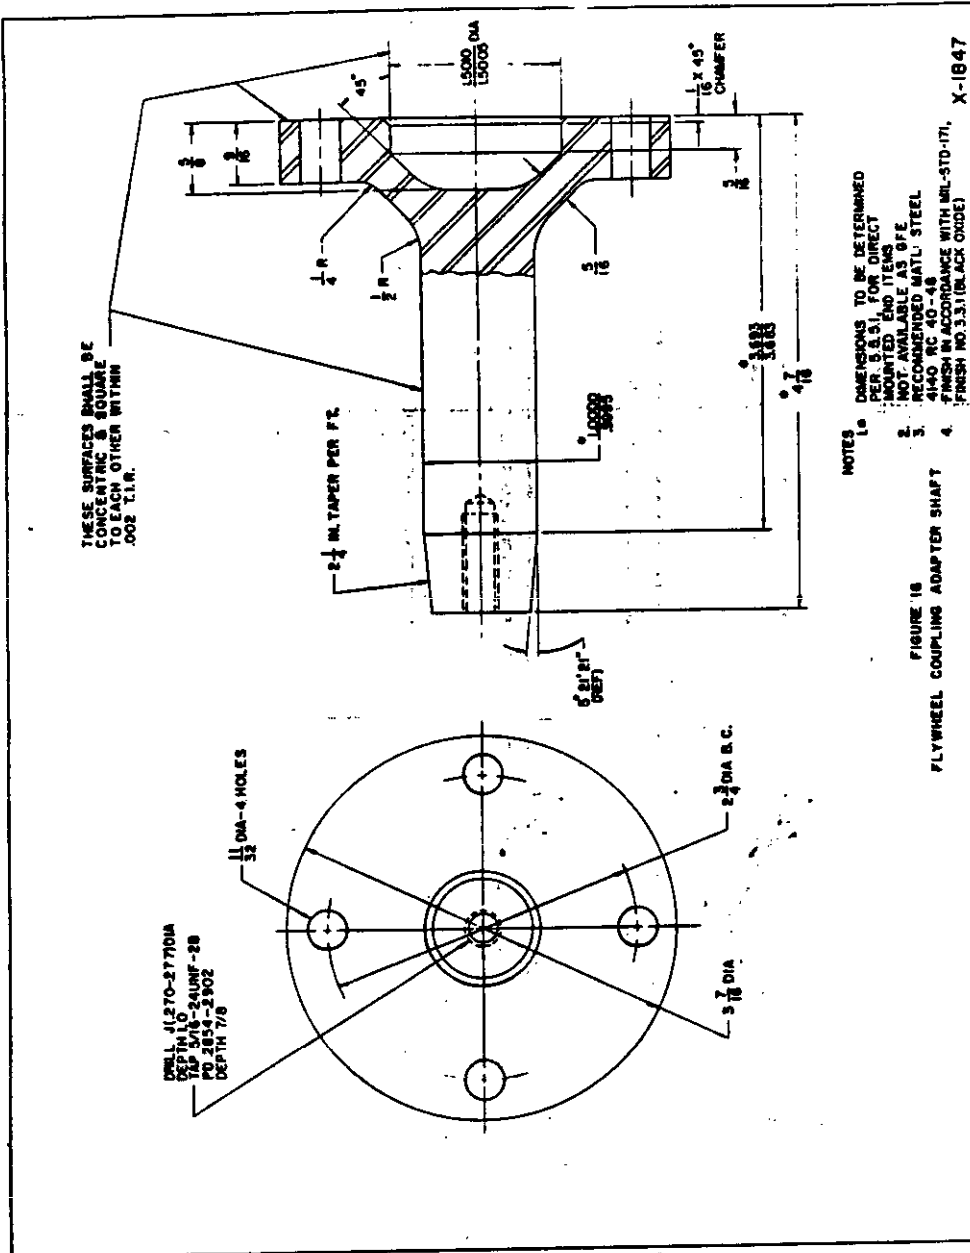

COUPLING ADAPTER SHAFT STIFFNESS

LENGTH FROM FLYWHEEL TO  
INERTIA MASS DIAMETER AT  
MINIMUM SECTION IN LENGTH  
SOLID STEEL SHAFTING

EQUATION:

$$K = \frac{1}{32} \frac{G D^4}{L}$$

G = 12 X 10<sup>6</sup> LB/IN<sup>2</sup>  
(STEEL)


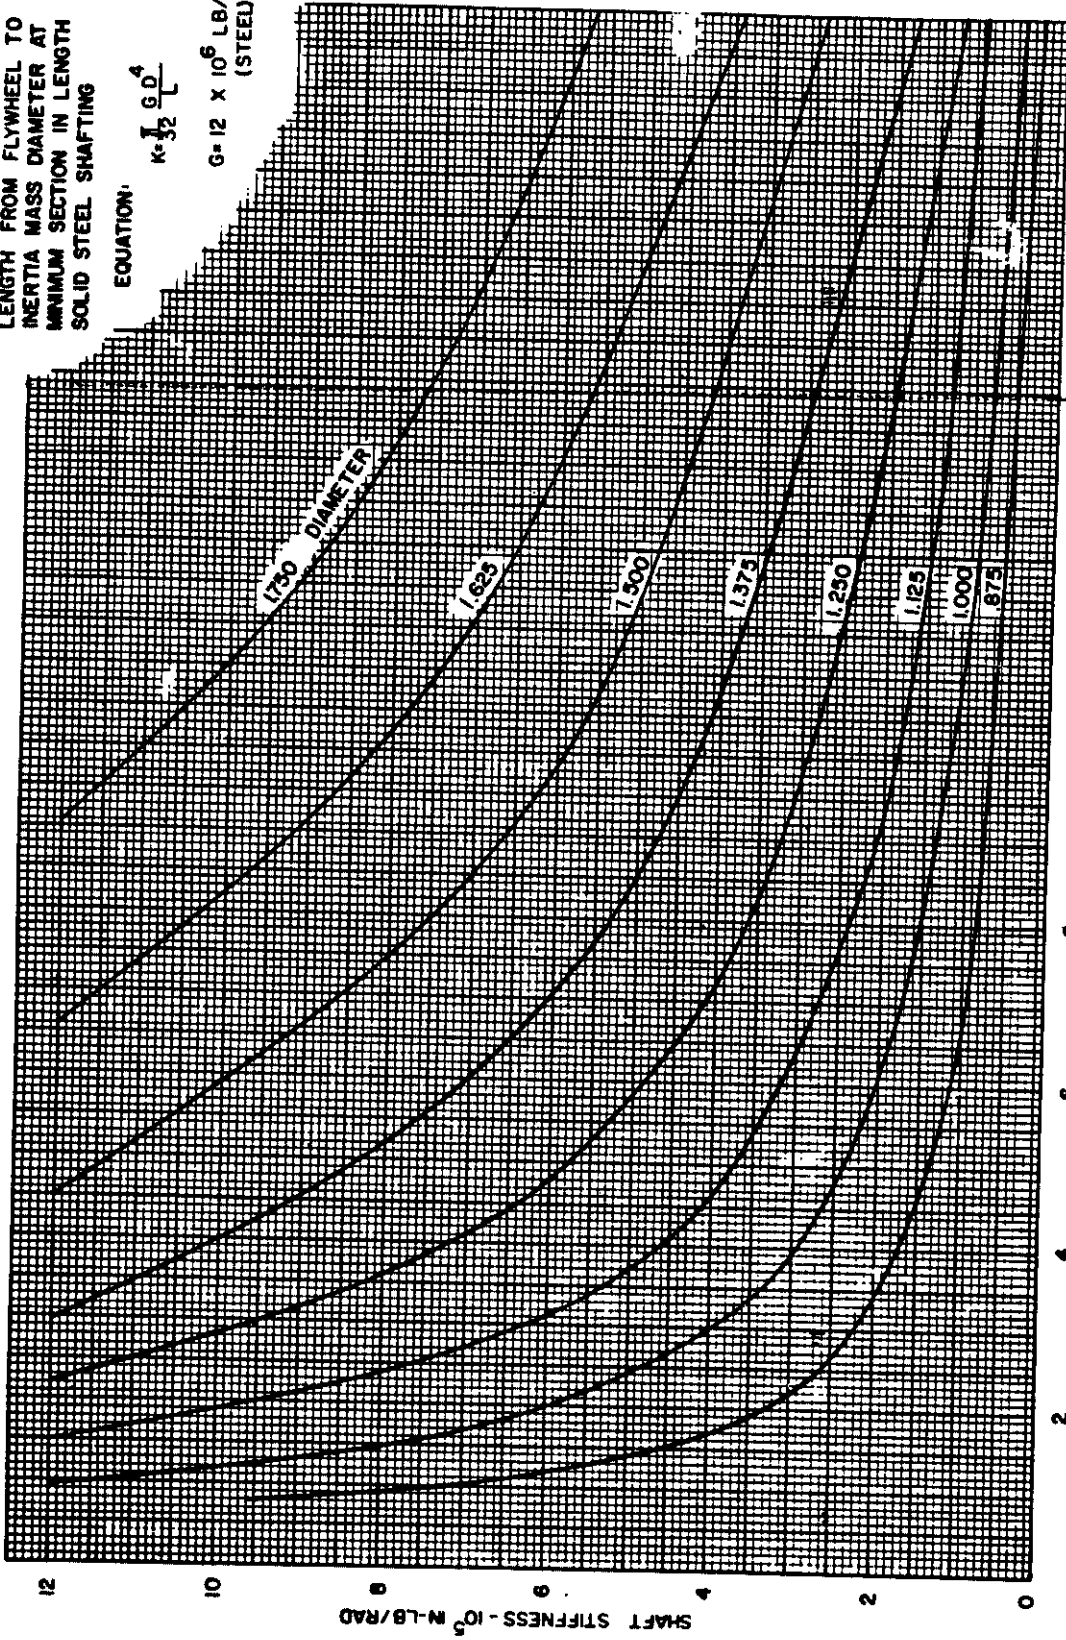


FIGURE 19  
COUPLING ADAPTER SHAFT STIFFNESS

X-1849

FUEL TANK MOUNTED ABOVE PUMP LEVEL  
(MAX. LENGTH OF FUEL LINE IS 20 FEET)

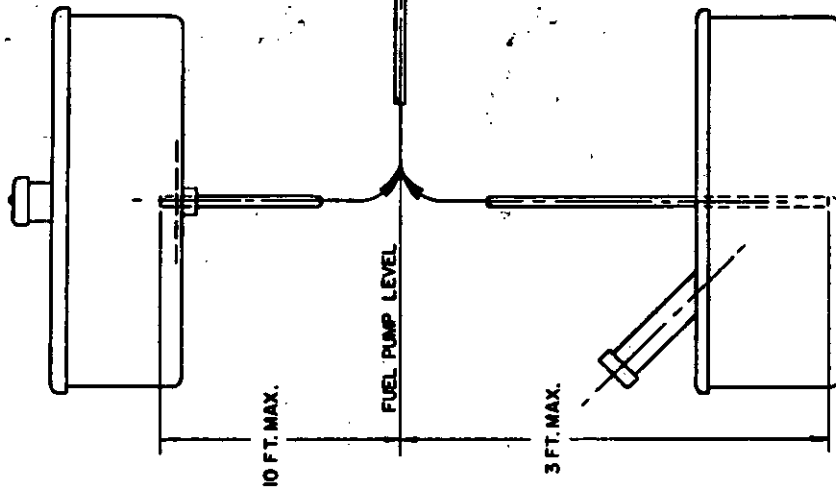

FUEL TANK MOUNTED BELOW PUMP LEVEL  
(MAX. LENGTH OF FUEL LINE IS 10 FEET)

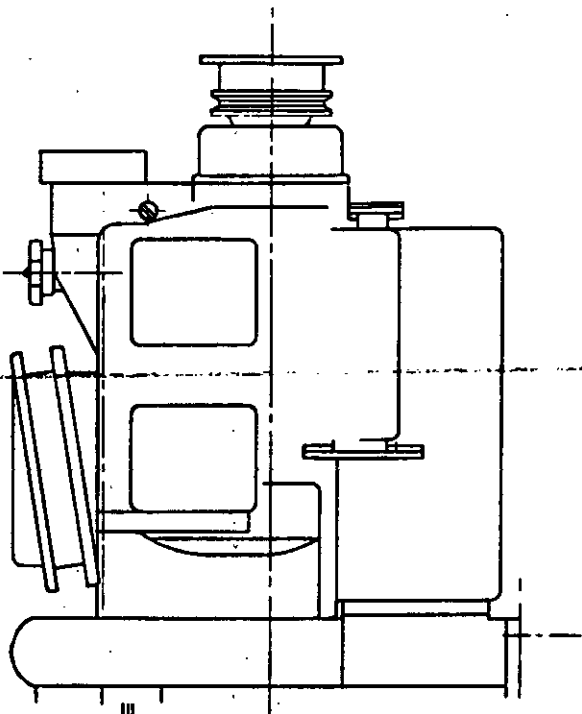


FIGURE 20  
MAXIMUM LIMITS FOR FUEL TANK LOCATIONS

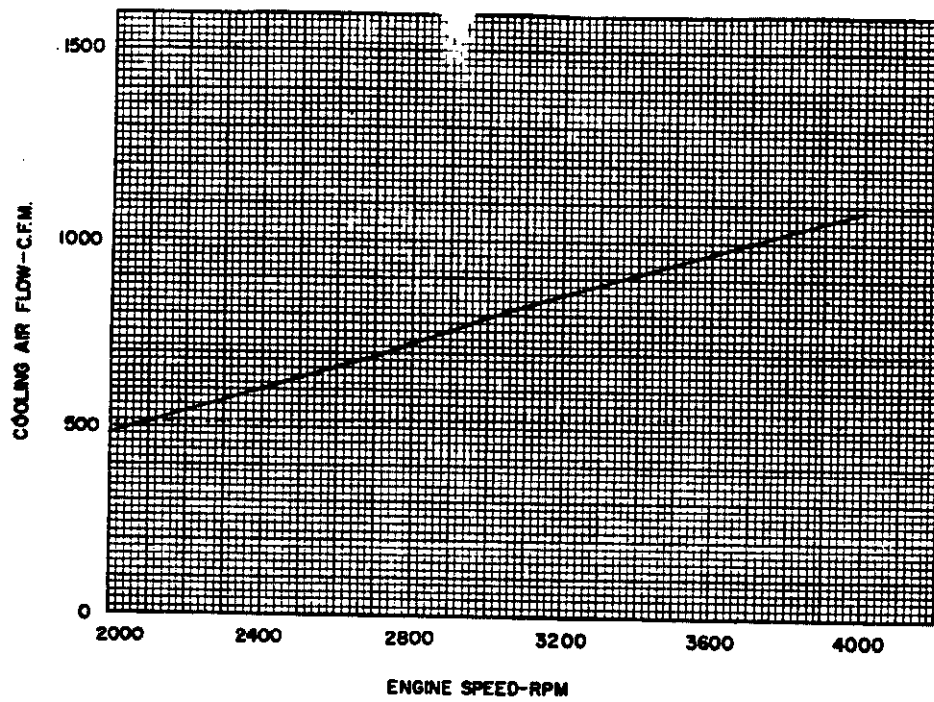


FIGURE 21  
COOLING AIR CAPACITY

X-1851

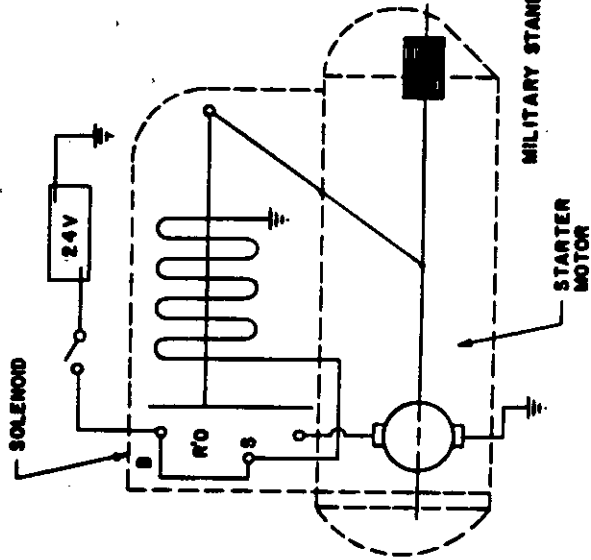
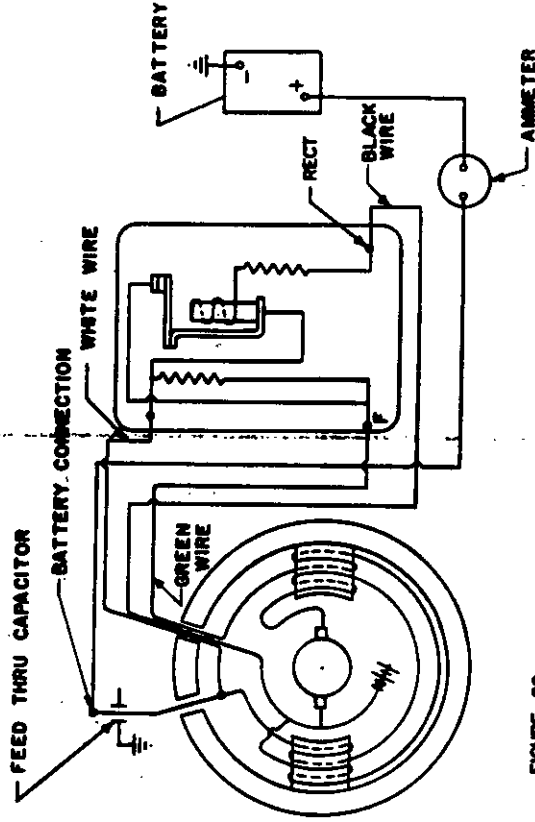
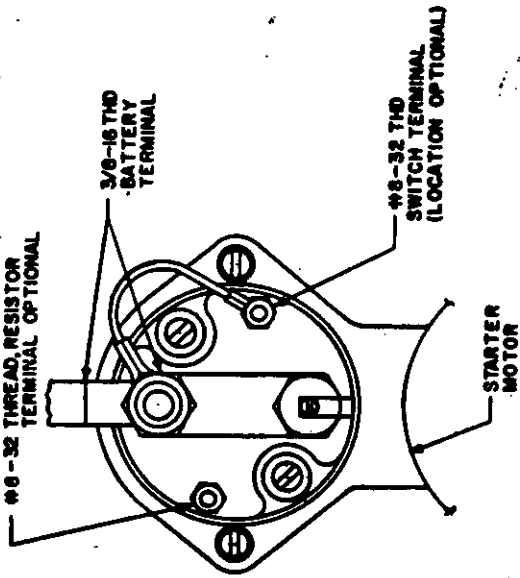
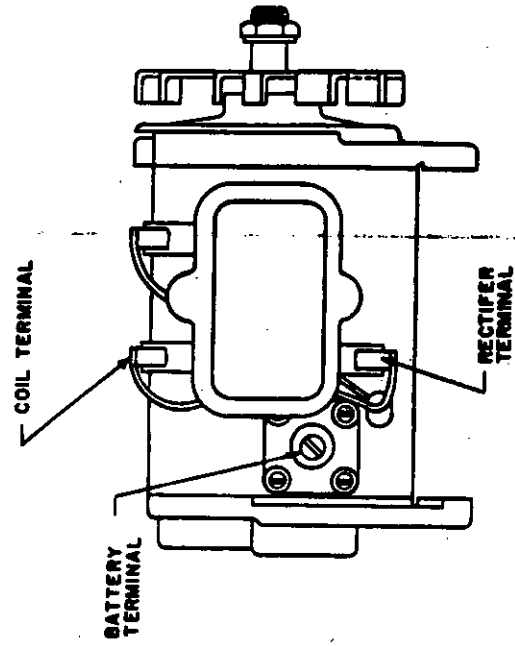


FIGURE 22

MILITARY STANDARD GENERATOR DAMPERE 24 VOLT AND ELECTRIC STARTER WIRING DIAGRAM

## STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER		2. DOCUMENT TITLE	
3a. NAME OF SUBMITTING ORGANIZATION		4. TYPE OF ORGANIZATION (Mark one) <input type="checkbox"/> VENDOR <input type="checkbox"/> USER <input type="checkbox"/> MANUFACTURER <input type="checkbox"/> OTHER (Specify): _____	
b. ADDRESS (Street, City, State, ZIP Code)			
5. PROBLEM AREAS			
a. Paragraph Number and Wording:			
b. Recommended Wording:			
c. Reason/Rationale for Recommendation:			
6. REMARKS			
7a. NAME OF SUBMITTER (Last, First, MI) - Optional		b. WORK TELEPHONE NUMBER (Include Area Code) - Optional	
c. MAILING ADDRESS (Street, City, State, ZIP Code) - Optional		8. DATE OF SUBMISSION (YYMMDD)	

(TO DETACH THIS FORM CUT ALONG THIS LINE.)