


OPEN POSITION (FREE)

SIDE VIEW

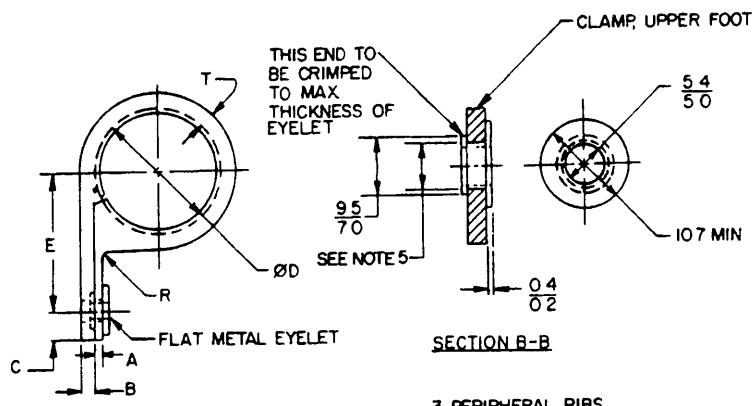

CLOSED POSITION (INSTALLED)

SECTION B-B




TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	$\pm 0.5$	$\pm 0.6$	A	B	C	F	G MIN RADIUS	$\pm 0.2$	$\pm 0.3$	T
03	3.2	10.2		± 2.1						
04	4	12.7		± 0.5						± 1.5
06	6	12.9			± 6.0	± 13.0	6.5	1.6	14.0	± 0.5
08	8	13.9		± 2.4		± 0.2				
10	10	14.9		± 0.2						
12	12	15.9	± 1.8							
14	14	19.1	± 0.3							
16	16	20.1								
18	18	21.1		± 2.8						± 1.8
20	20	22.1		± 0.6						± 0.5
22	22	23.1								
24	24	24.1	2.4							
26	26	25.1	± 0.9							
28	28	26.8								
30	30	27.8								
32	32	28.8			8.0	± 15.0			15.5	
34	34	29.8			± 0.3	± 1.5	7.5	2.8		
36	36	30.8								
38	38	31.8	± 2.8	± 3.2						± 3.0
40	40	32.8	± 0.6	± 0.2						± 1.0
42	42	34.0								
44	44	35.2								
46	46	36.4								
48	48	37.6								
50	50	38.8								

USER ACTIVITIES  
ARMY—M1  
NAVY—MC, OS, SH

REVIEWER ACTIVITIES  
ARMY—AV/CR  
NAVY—EC  
AIR FORCE—82  
DLA—IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited  
This military standard is approved for use by all Departments and Agencies of the Department of Defense  
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A NAVY—AS Other Cost ARMY—AR AIR FORCE—99	INTERNATIONAL INTEREST	TITLE <b>CLAMP, LOOP, PLASTIC, WIRE SUPPORT, RIBBED INNER DIAMETER, METRIC</b>	<b>MILITARY STANDARD</b>	
			<b>DS14488</b>	
PROCUREMENT SPECIFICATION MIL-S-23190	SUPERSEDES:		PAGE	1 OF 2

FED. SUP CLASS  
5 3 4 0

REQUIREMENTS:

1. MATERIAL:

CLAMP: POLYAMIDE PLASTIC (NYLON) IN ACCORDANCE WITH ASTM D4066, GROUP 1, CLASS 1, GRADE 1.  
COLOR SHALL BE NATURAL.  
EYELET: ALUMINUM ALLOY 6061, ANODIZED IN ACCORDANCE WITH MIL-A-8625.


2. MARKING: MARKING SHALL CONSIST OF MANUFACTURER'S NAME, FSCM OR TRADEMARK AND THE COMPLETE PART NUMBER. (SEE REQUIREMENT 5).

3. DIMENSIONS: DIMENSION ØD SHALL CHECK TO DIMENSIONS INDICATED IN TABLE I WITH ENDS HELD AS SHOWN.

4. TENSILE STRENGTH: TENSILE STRENGTH FOR DASH NUMBERS 03 THRU 10 SHALL BE 445 NEWTONS MINIMUM AND FOR DASH NUMBERS 12 THRU 50 SHALL BE 1000 NEWTONS MINIMUM.

5. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC DS SHEET NUMBER FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I.

EXAMPLE: DS14488-08



DS14488-08 INDICATES: CLAMP, LOOP, PLASTIC, WIRE SUPPORT, METRIC, NOMINAL CLAMPING DIAMETER OF 8mm.

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE  $\pm 0.25$  FOR DECIMAL DIMENSIONS AND  $\pm 5^\circ$  FOR ANGULAR DIMENSIONS.
- CLAMPS SHALL BE FREE OF BURRS AND SHARP EDGES. MOLD MARKS AND NORMAL VENT FLASH ARE PERMISSIBLE.
- SIDE GATE CUT-OFF IS PERMISSIBLE, PROVIDED ØD DIAMETER AND INNER EDGE RADIUS IS NOT DISTURBED.
- THESE CLAMPS ARE INTENDED FOR TYING AND SUPPORT OF CABLE, CABLE ASSEMBLIES AND WIRE IN ELECTRICAL AND ELECTRONIC EQUIPMENT OF NONCRITICAL AREAS WHERE TEMPERATURES DO NOT EXCEED 100° C.
- DIAMETER OPTIONAL TO ASSURE FIT TO EYELET.
- IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
- REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:  
ARMY-MI  
NAVY-MC, OS, SH

REVIEWER ACTIVITIES:  
ARMY-AV, CR  
NAVY-EC  
AIR FORCE-82  
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 2 APR 86  
REVISED

P. A. NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE  <b>CLAMP, LOOP, PLASTIC, WIRE SUPPORT, RIBBED INNER DIAMETER, METRIC</b>	<b>MILITARY STANDARD</b>	
			<b>DS14488</b>	
PROCUREMENT SPECIFICATION MIL-S-23190		SUPERSEDES:	PAGE	2 OF 2