Downloaded from https://www.everyspec.com

FED. SUP CLASS
2240

FOR FOREIGN SERVICE LOCOMOTIVES AND CARS

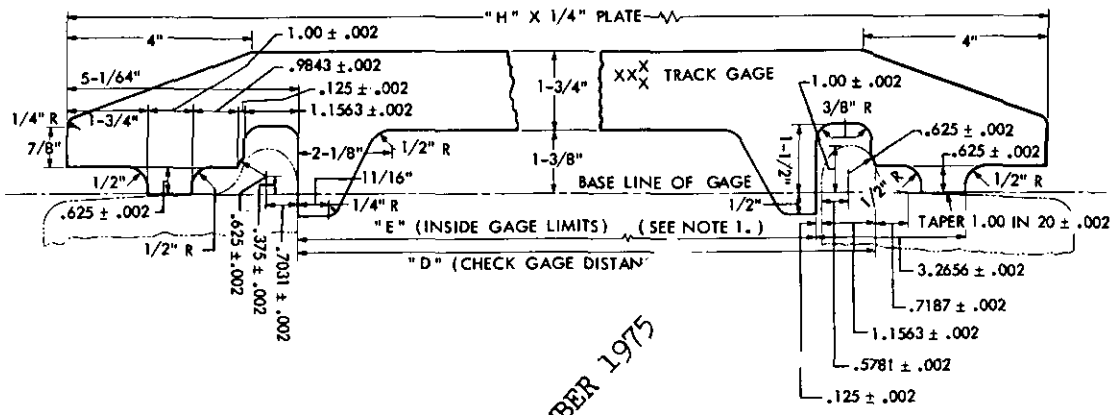

MATERIAL: SAE-1020

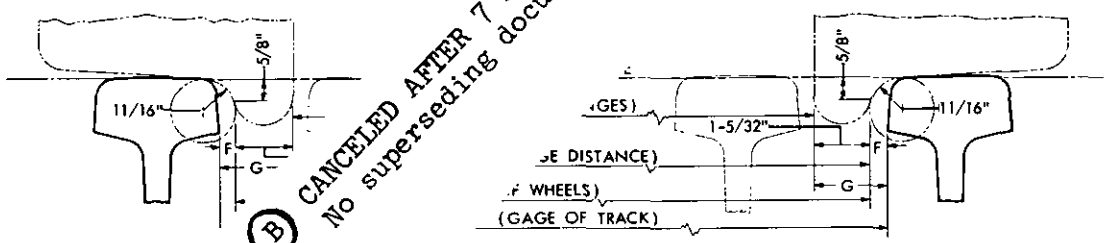

(B) CANCELED AFTER 7 NOVEMBER 1975
No superseding document.

LINE	A		C	D	E	F	G	H	
1	36"	32-7/8	35-3/16	34-1/32	32-3/4	13/32	1-9/16	42-25/32	
2	39-3/8"	36-13/32	38-23/32	37-9/16	36-9/32	21/64	1-31/64	46-5/16	
3	42"	39-1/32	41-11/32	40-3/16	38-29/32	21/64	1-31/64	48-15/16	
(A) 4	56-1/2"	53-17/32	55-27/32	54-11/16	53-13/32	21/64	1-31/64	63-7/16	
5	60"	56-11/16	59	57-27/32	56-9/16	1/2	1-21/32	66-19/32	
6	63"	60	62-5/16	61-5/32	59-7/8	11/32	1-1/2	69-29/32	
7	66"	63	65-5/16	64-5/32	62-7/8	11/32	1-1/2	72-29/32	

NOTE 1.
IN MOUNTING STEEL WHEELS WITH WORN FLANGES, MOUNT TO INSIDE GAGE LIMITS PLUS 1/8 INCH.

NOTE 2.
THE TOLERANCE OF ALL DIMENSIONS SHALL NOT EXCEED ± 1/64 INCH, UNLESS OTHERWISE SPECIFIED.

APPROVED 25 February 1964 REVISED (A) 18 August 1966 (B) 7 November 1975

This Military Standard has been approved by the Mobility Equipment Command, Department of the Army and is mandatory for use by that activity. All other Military activities are required to employ this standard where suitable.

P.A. Army - ME Other Cust NONE	TITLE CHECK GAGE, MOUNTING, STEEL WHEELS, LOCOMOTIVES AND CARS, 36, 39-3/8, 42, 56-1/2, 60, 63, AND 66 IN. GAGES, FOREIGN SERVICE	MILITARY STANDARD MS87012(ME)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: TC DWG. 95-D-49	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

*U.S. GOVERNMENT PRINTING OFFICE: 1966-251-514/X-3808