

INCH-POUND

MIL-DTL-71186A
5 August 2009
SUPERSEDING
MIL-C-71186 (AR)
31 January 1994

DETAIL SPECIFICATION

CARBINE, 5.56 Millimeter – M4A1

Inactive for new design after 27 February 1997

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This detail specification prescribes the requirements and identifies the verification procedures for the lightweight, air-cooled, gas operated, magazine-fed, 5.56 millimeter (mm) weapon designed for a full automatic burst or semi-automatic fire, hereafter referred to simply as the weapon.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Comments, suggestions, or questions on this document should be addressed to Commander ARDEC, ATTN: RDAR-QES-E, Picatinny Arsenal, NJ 07806-5000 or emailed to ardecstdzn@conus.army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at <http://assist.daps.dla.mil>.

AMSC N/A

FSC 1005

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

MIL-DTL-71186A

2.2 Government documents.

2.2.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-372	-	Cleaning Compound Solvent (for Bore of Small Arms and Automatic Aircraft Weapons)
MIL-PRF-63460	-	Lubricant, Cleaner and Preservative for Weapons and Weapons Systems
MIL-W-13855	-	Weapons: Small Arms and Aircraft Armament Systems, General Specification for
MIL-W-63150	-	Weapons and Support Material, Standard Quality Assurance Provisions for

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-130	-	Identification Marking of US Military Property
MIL-STD-1916	-	DOD Preferred Methods for Acceptance of Product

(Copies of these documents are available online at <http://assist.daps.dla.mil/quicksearch/> or from the Standardization Documents Order Desk, 700 Robbins Avenue, Bldg 4D, Philadelphia, PA 19111-5904.)

2.2.2 Other government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ARMY TECHNICAL MANUALS

TM9-1005-319-10	Operator's Manual for Carbine, 5.56MM, M4A1 (1005-01-382-0953) (EIC:4GC)
-----------------	--

(These TMs may be viewed and printed at <https://www.logsa.army.mil/etms/online.htm>.)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC) DRAWINGS

12972700	Carbine, 5.56 MM, M4A1
9342868	Cartridge, 5.56MM, Ball, M855
7274758	Gage, Trigger Pull-Field Service
8440218	Gage, Indicator
8440219	Gage, Plug

MIL-DTL-71186A

8440220	Gage, Plug
8440920	Cylinder, Pressure
8443572	Computer, Rate of Fire
8443915	Gage, Headspace (Min)
8443949	Gage, Headspace (Max)
8440878	Gage, Fixture, Dial Indicating
8443733	Gage, Plug, Straightness
8443957	Gage, Location
8448202	Gage, Bore Straightness
8448510	Bolt
12991850	Barrel and Barrel Extension Assembly
12972652	Marking, Lower Receiver Model M4A1
10533839	Cartridge, 5.56MM, Test, High Pressure, M197
11837922	Gage, indicating
11837943	Targeting and Accuracy Test Firing Fixture
11837944	Barrel and Bolt Proof Testing Fixture
11837945	Function Firing Test Stand
11838443	Gage, Flush Pin
13004788	Bolt Carrier Assembly

(Copies of these drawings maybe requested online at pica.drawing.request@conus.army.mil or from US Army ARDEC, ATTN: RDAR-EIS-PE, Picatinny Arsenal, NJ 07806-5000.)

2.3 Non-government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR TESTING AND MATERIALS INTERNATIONAL
(ASTM International)

ASTM E1444 - Standard Practice for Magnetic Particle Examination

(Copies of ASTM standards may be ordered online at <http://www.astm.org/> or from the ASTM International, 100 Barr Harbor Drive, Conshohocken, PA 19428-2959.)

SPORTING ARMS AND AMMUNITION MANUFACTURERS' INSTITUTE
STANDARD (SAAMI)

ANSI/SAAMI-Z299.4 - Voluntary Industry Performance Standards for Pressure and Velocity of Centerfire Weapon Sporting Ammunition for the Use of Commercial Manufacturers

(Copies of SAAMI standards may be ordered online at <http://www.saami.org/>.)

MIL-DTL-71186A

2.4 Order of precedence. Unless otherwise noted herein or in contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article inspection. When specified a sample (see 6.2) of the weapon shall be subjected to first article inspection in accordance with Table II and 4.2.

3.2 Conformance inspection. Unless otherwise specified, all weapons shall be subjected to conformance inspection in accordance with Table II and 4.3.

3.3 Upper receiver and lower receiver assemblies.

3.3.1 Upper receiver and lower receiver assembly retention. When the upper receiver assembly and lower receiver assembly are attached and the takedown and pivot pins are pushed to their extreme in positions, the upper receiver assembly and lower receiver assembly shall be held securely in the closed position.

3.3.2 Opening of the upper receiver and lower assembly. When the takedown pin is withdrawn to its extreme out position, the upper receiver assembly and lower receiver assembly shall not be held securely in the closed position.

3.3.3 Detachment of the upper receiver assembly from the lower receiver assembly. The upper receiver assembly shall detach from the lower receiver assembly when the pivot and takedown pins are in their extreme out positions.

3.4 Lower receiver assembly.

3.4.1 Hammer. When the hammer is released from the cocked position, it shall pivot forward to the stop position under spring action without binding (see 6.10.4).

3.4.2 Automatic sear.

3.4.2.1 Automatic sear motion. When the selector is placed in the "AUTO" position, the fire control selector shall rotate the automatic sear from its neutral position to its active position (able to engage the hammer). When the selector is removed from the "AUTO" position, the sector shall rotate the automatic sear to its neutral position (unable to engage the hammer) without binding.

3.4.2.2 Automatic sear action. When the fire control selector is in the "AUTO" position and the hammer has been cocked by backward motion of the bolt carrier, the automatic sear shall engage and restrain the hammer until the sear is tripped by the forward motion of the bolt carrier.

3.4.3 Fire control selector.

MIL-DTL-71186A

3.4.3.1 Fire control selector positions. The fire control selector shall have three positions; safe, semi-automatic and automatic. On the weapon, these positions shall be labeled as SAFE, SEMI, and AUTO.

3.4.3.2 Fire control selector motion. When the hammer is cocked, the fire control selector shall rotate manually from one position to another without binding.

3.4.3.3 Fire control selector position retention. The fire control selector shall remain in place in each position by a perceptible spring detent load until manually reset. The load shall be evidenced by a tactile (see 6.10.8) resistance as the selector is arriving and leaving the position. In addition an audible click shall be heard when the detent engages.

3.4.3.4 Fire control selector in SAFE position functioning. With the hammer cocked and the fire control selector in the "SAFE" position, the hammer shall not be released when the trigger is pulled. As a result the weapon shall be incapable of being fired.

3.4.3.5 Fire control selector in SEMI position functioning. When the selector is placed in the "SEMI" position, the selector shall allow the disconnect to engage the hammer, so that the weapon is capable of semi-automatic firing only (single shot with each pull of the trigger).

3.4.3.6 Fire control selector in AUTO position functioning. When the selector is placed in the "AUTO" position, it shall permit the automatic sear to engage the hammer, so that the carbine is capable of automatic firing (continuous firing until the trigger is released or all cartridges are expended).

3.4.4 Bolt catch.

3.4.4.1 Bolt catch motion. The bolt catch shall move from its recessed position, out of the bolt carrier's way, to its raised position, a position where it can retain the bolt. Movement from the raised to recessed position shall be under spring action.

3.4.4.2 Bolt catch retention. The bolt catch shall be securely retained on the lower receiver by the bolt catch spring pin.

3.4.4.3 Bolt catch passive action. When positioned manually, the bolt catch shall remain engaged and shall hold the bolt carrier in the open position. When positioned by action of the magazine follower, the bolt catch shall remain engaged and shall hold the bolt carrier in the open position.

3.4.4.4 Bolt catch release. When the bolt catch release is depressed (held in the "down" position by the bolt catch plunger and spring), the bolt catch shall recess and allow a retained bolt carrier to return to the battery position (see 6.10.11).

3.4.5 Magazine catch.

MIL-DTL-71186A

3.4.5.1 Magazine catch action. The magazine catch, under spring action, shall securely retain the magazine in the magazine well. An audible click shall be heard when the catch engages.

3.4.5.2 Magazine catch tension adjustment. The spring tension of the magazine catch shall be adjustable by depressing the magazine release button and rotating the magazine catch clockwise to tighten; counterclockwise to loosen. Spring tension shall be measured by the tactile resistance observed as the magazine overcomes the magazine catch.

3.4.6 Magazine release button.

3.4.6.1 Magazine release button action. When the magazine release button is depressed, it shall disengage the magazine catch from the magazine and permit removal of the magazine.

3.4.6.2 Magazine release button and bolt catch interaction. When the bolt is held open (rearward) by the bolt catch, and the magazine release button is depressed, the empty magazine shall be ejected by the spring tension in the magazine follower spring.

3.4.7 Disconnect.

3.4.7.1 Disconnect motion. When the fire control selector is placed in the "SEMI" position, the fire control selector shall rotate the disconnect from its neutral position (not engaging the hammer) to its active position (engaging the hammer). When the selector is removed from the "SEMI" position, the selector shall rotate the disconnect back to its neutral position.

3.4.7.2 Disconnect action. When the selector is in the "SEMI" position and the trigger is held back, the disconnect shall engage and restrain the hammer in the cocked position until the trigger is released. When the trigger is released, the disconnect shall allow the hammer to return to the normal cocked position (when the hammer is held back by only the trigger). The transfer from the disconnect to the normal cocked position shall cause an audible click as the trigger engages the hammer.

3.4.8 Trigger.

3.4.8.1 Trigger hammer cocked position. The trigger shall hold the hammer in the cocked position until the trigger is pulled.

3.4.8.2 Trigger normal position upon full trigger pull. After a full trigger pull (see 6.10.9), the trigger shall return to its normal forward position under spring action.

3.4.8.3 Trigger normal position upon partial pull. After a partial trigger pull (see 6.10.10), the trigger shall return to its normal forward position under spring action.

3.4.9 Trigger guard.

MIL-DTL-71186A

3.4.9.1 Trigger guard motion. The trigger guard shall move from its closed position to its fully open position (resting against the pistol grip) and back without binding.

3.4.9.2 Trigger guard open retention. The trigger guard shall be securely retained in the open position against the pistol grip by the trigger guard spring pin.

3.4.9.3 Trigger guard closed retention. The trigger guard shall be securely retained in the closed position by the trigger guard spring loaded detent.

3.4.10 Pivot pin.

3.4.10.1 Pivot pin motion. The pivot pin shall move between its extreme in and extreme out positions without binding.

3.4.10.2 Pivot pin retention in extreme in position. The pivot pin shall be securely retained in the extreme in position by spring action of the detent.

3.4.10.3 Pivot pin retention in extreme out position. The pivot pin shall be securely retained in the extreme out position by spring action of the detent.

3.4.11 Takedown pin.

3.4.11.1 Takedown pin motion. The takedown pin shall move between its extreme in and extreme out positions without binding.

3.4.11.2 Takedown pin retention in extreme in position. The takedown pivot pin shall be securely retained in the extreme in position by spring action of the detent.

3.4.11.3 Takedown pin retention in extreme out position. The takedown pin shall be securely retained in the extreme out position by spring action of the detent.

3.4.12 Pistol grip.

3.4.12.1 Pistol grip retention. The pistol grip shall be securely retained on the lower receiver.

3.4.12.2 Pistol grip position. The pistol grip shall not interfere with operation of the selector lever.

3.4.13 Buttstock assembly.

3.4.13.1 Buttstock assembly retention. The buttstock assembly shall not rotate on the lower receiver extension.

3.4.13.2 Buttstock assembly motion. Pressure on the release lever (rear end) towards the buttstock shall withdraw the lock pin allowing movement between the extended and extracted

MIL-DTL-71186A

positions. Release of the lever when the buttstock is positioned in the extended or retracted position shall allow the lock pin to secure the buttstock in that position.

3.4.13.3 Buttstock assembly removal. Pulling the rear end of the release lever away from the buttstock shall allow the buttstock to slide rearward off the lower receiver extension.

3.4.14 Buffer assembly.

3.4.14.1 Buffer assembly motion. The buffer assembly shall move between its retained position and its fully compressed position without binding. Movement from compressed to retained shall be under spring action.

3.4.14.2 Buffer assembly retention. The buffer assembly shall be securely retained in the lower receiver assembly by the spring loaded buffer retainer.

3.4.14.3 Buffer assembly disassembly removal. The buffer assembly shall be capable of being disassembled from the lower receiver assembly when the spring loaded buffer retainer is manually depressed.

3.5 Upper receiver assembly.

3.5.1 Barrel assembly.

3.5.1.1 Barrel assembly straightness. The barrel assembly shall be straight to the extent that a cylindrical plug with a diameter of $.2173 + .0001$ inches, and six (6) inches in length shall drop through the barrel bore, both directions, of its own weight.

3.5.1.2 Barrel assembly angular deviation. The barrel shall have a maximum angular deviation of zero degrees and three minutes ($0^{\circ} 3'$) from the axial centerline of the barrel.

3.5.2 Gas tube.

3.5.2.1 Gas tube retention. The gas tube shall be securely retained to the front sight assembly by the gas tube spring pin.

3.5.2.2 Gas tube alignment. The gas tube shall be positioned for proper alignment with the bolt carrier key. Proper alignment shall allow for the gas tube to freely move in and out of the bolt carrier key without binding.

3.5.3 Rail cover.

3.5.3.1 Rail cover mounting. The rail covers shall be capable of being disassembled from and assembled to the rail adapter system by applying thumb pressure to the retaining clip and sliding rail covers onto the rail adapter system until the retaining clip automatically engages. The retaining clips shall only engage with the two end recoil slots.

MIL-DTL-71186A

3.5.3.2 Rail cover retention. The rail covers shall be securely retained on the rail adapter system by the retaining clip.

3.5.4 Vertical pistol grip.

3.5.4.1 Vertical pistol grip motion. When the lock assembly is unlocked, the vertical pistol grip shall move freely along the rail adapter system without binding.

3.5.4.2 Vertical pistol grip retention. The vertical pistol grip shall be securely retained on the rail adapter system by the lock assembly.

3.5.5 Front sight assembly.

3.5.5.1 Front sight assembly retention. The front sight assembly shall be securely retained on the barrel assembly by two taper pins.

3.5.5.2 Front sight post retention. The front sight post shall be held in position by the spring loaded front sight detent.

3.5.5.3 Front sight post adjustment. The detent, when depressed, shall disengage the front sight post and allow vertical adjustment of the post. Clockwise rotation of the front sight post, as indicated by the arrow on the top of the front sight, shall lower the front sight post. When the weapon is zeroed, there shall be at least 16 additional clicks of adjustment available in a downward direction.

3.5.6 Back-up iron sight.

3.5.6.1 Back-up iron sight retention. The back-up iron sight shall be securely retained in the rearmost slot on the upper receiver using the recoil screw and the locking bar.

3.5.6.2 Back-up iron sight motion. The rear sight shall pivot to full vertical position under spring action when at the extreme left and extreme right windage positions.

3.5.6.3 Back-up iron sight windage knob position retention. The windage knob shall be held in position by the spring loaded detent.

3.5.6.4 Back-up iron sight windage knob motion. The windage knob shall be capable of rotating seven complete revolutions moving the rear sight from the extreme left to the extreme right without binding.

3.5.6.5 Back-up iron sight trajectory compensation. The rear sight shall be capable of elevating, by means of the sight cam, to compensate for trajectory for ranges from 200 meters to 600 meters.

3.5.7 Ejection port.

MIL-DTL-71186A

3.5.7.1 Ejection port cover motion. The ejection port cover shall operate between its closed position and its open position (resting on the lower receiver) without binding. Movement from the open to closed position shall be under spring action.

3.5.7.2 Ejection port cover action. The ejection port cover shall open under spring action when the bolt carrier is moved from the locked position rearward, or from the open position forward.

3.5.7.3 Ejection port cover retention. The cover shall be securely retained in the closed position by the cover detent.

3.5.8 Forward assist assembly.

3.5.8.1 Forward assist assembly motion. When depressed, the forward assist assembly shall move from its fully outward position (where the pawl is completely disengaged from the bolt carrier) to a position where the pawl engages the bolt carrier, in battery position. When released, the forward assist assembly shall return under spring action to its fully outward position.

3.5.8.2 Forward assist assembly action. Depressing and releasing the forward assist shall cause progressive movement of the bolt carrier assembly into the battery position.

3.5.9 Compensator alignment. The third (middle) slot shall be straight up at top dead center (TDC). TDC is defined by the front sight post. The alignment may vary as much as one half the width of the slot either direction.

3.5.10 Front sling swivel.

3.5.10.1 Front sling swivel motion. The front sling swivel shall move between its forward position, touching the barrel, to its rear position, touching the rail adapter system, without binding.

3.5.10.2 Front sling swivel retention. The front sling swivel shall not disassemble from the weapon because it is securely retained to the front sight assembly by the rivet.

3.5.11 Bolt carrier assembly.

3.5.11.1 Key and bolt carrier assembly lock. The bolt carrier and key assembly shall move through its full range of travel without binding in the upper receiver.

3.5.11.2 Firing pin.

3.5.11.2.1 Firing pin motion. The firing pin shall move from a recessed position, a position below the bolt face, to a maximum protrusion of 0.036 inches without binding.

3.5.11.2.2 Firing pin retention. The firing pin shall be securely retained in the bolt carrier

MIL-DTL-71186A

assembly by the firing pin retaining pin.

3.5.11.2.3 Firing pin protrusion. The firing pin protrusion shall be a maximum of 0.036 inches and a minimum 0.028 inches.

3.5.11.2.4 Firing pin plating workmanship. The chromium plating of the firing pin shall be free of nodules, flaking, stripping, anode burns and evidence of etched base steel, except as specified on the applicable drawing 8448503.

3.5.12 Charging handle retention. When the charging handle is placed in the forward position it shall engage and lock securely in the upper receiver by the charging handle release.

3.5.13 Bolt assembly.

3.5.13.1 Bolt assembly motion. The bolt assembly shall move through its full range of travel and lock in the battery position.

3.5.13.2 Bolt assembly retention. The bolt assembly shall be securely retained in the bolt carrier by the bolt cam pin.

3.5.13.3 Extractor.

3.5.13.3.1 Extractor motion. The extractor shall move between its rest position (no cartridge present) and its active position (cartridge present) without binding in the bolt.

3.5.13.3.2 Extractor action. The extractor shall be capable of engaging and extracting cartridge cases from the barrel chamber when the weapon is function fired or manually operated.

3.5.13.3.3 Extractor retention. The extractor shall be securely retained in the bolt by the extractor pin.

3.5.13.4 Ejector.

3.5.13.4.1 Ejector motion. The ejector shall move between its raised position (no cartridge present) and its recessed position (cartridge present) without binding. Ejector movement from its recessed position to its raised position shall be under spring action.

3.5.13.4.2 Ejector action. The ejector shall eject cartridge cases completely out of the weapon when the weapon is function fired or manually operated.

3.5.13.4.3 Ejector retention. The ejector shall be securely retained in the bolt by the ejector pin.

3.5.13.5 Cam pin.

3.5.13.5.1 Cam pin motion. The cam pin shall move through its full range of travel in the

MIL-DTL-71186A

bolt carrier without binding.

3.5.13.5.2 Cam pin retention. The cam pin shall be securely retained in the bolt assembly by the firing pin.

3.5.13.5.3 Cam pin disassembly. The cam pin shall be capable of being removed from the bolt carrier without removal of the bolt carrier key assembly.

3.5.13.5.4 Cam pin symmetry. The cam pin shall be capable of being disassembled from the bolt and bolt carrier assembly and reassembled 180° about its vertical axis from its original position without causing binding in the assembly.

3.6 Functional characteristics.

3.6.1 Firing pin indents.

3.6.1.1 Firing pin indent. The weapon shall meet the requirement of the bolt action indent, muzzle down position indent and firing pin indent position.

3.6.1.2 Bolt action indent. When the bolt is closed and the firing mechanism is released, the firing pin indent shall not be less than 0.020 inches.

3.6.1.3 Muzzle down position indent. When in a muzzle down position, the bolt carrier assembly shall be released from the full recoil position and the firing mechanism shall not be actuated, the firing pin indent shall not be greater than 0.008 inches.

3.6.1.4 Firing pin indent location. The firing pin indent shall not be off-center more than one half the maximum diameter of the indent.

3.6.1.5 Firing pin protrusion. The firing pin protrusion shall not be greater than 0.036 inches and shall not be less than 0.028 inches.

3.6.2 Trigger pull.

3.6.2.1 Minimum trigger pull. The minimum trigger pull shall not be less than 5.5 pounds.

3.6.2.2 Maximum trigger pull. The maximum trigger pull shall not be greater than 8.5 pounds.

3.6.2.3 Creep. The M4A1 trigger shall be free of perceptible rough movement between the time the trigger slack is taken up and the hammer is released.

3.6.3 High pressure resistance.

3.6.3.1 High pressure resistance test. The barrel assembly in accordance with drawing

MIL-DTL-71186A

12991850 and bolt in accordance with drawing 8448510 shall withstand the firing of one M197, 5.56mm high pressure test cartridge in accordance with drawing 10533839 or commercial equivalent conforming to SAAMI-Z299.4 specifications. Unless otherwise specified, the barrel assembly and bolt shall be tested concurrently.

3.6.3.2 Headspace. After the high pressure resistance test, each weapon shall be gaged to meet headspace requirement after proof firing.

3.6.3.2.1 Minimum headspace. After the high pressure resistance test, the headspace shall not be less than 1.4646 inches when measured to the 0.330 inches datum diameter on the first shoulder of the chamber.

3.6.3.2.2 Maximum headspace. After the high pressure resistance test, the headspace shall not be greater than 1.4706 inches when measured to the 0.330 inches datum diameter on the first shoulder of the chamber.

3.6.3.3 Barrel assembly integrity. After the high pressure resistance test, the barrel assembly shall be free of cracks, seams, or other defects.

3.6.3.4 Bolt assembly integrity. After the high pressure resistance test, the bolt assembly shall be free of cracks, seams, or other defects.

3.6.3.5 High pressure test cartridge integrity. After the high pressure resistance test, the cartridge cases shall be examined for bulges, splits, rings and other defects caused by defective chambers of the barrel assembly.

3.6.4 Function firing.

3.6.4.1 Function firing semi-automatic. The weapon shall operate without malfunctions or unserviceable parts (see 6.10.3), as defined by Table I, during one 30-round cycle in semi-automatic mode. Rounds number 5 thru 15 shall be used for the target and accuracy verification in support of 3.6.6.

3.6.4.2 Function firing automatic. The weapon shall operate without malfunctions or unserviceable parts, as defined by Table I, during one (1) thirty (30) round cycle in automatic mode. The weapon shall fire all thirty (30) rounds as long as the trigger is held fully rearward position. Any of the twenty (20) rounds shall be used for the cyclic rate of fire verification in support of cyclic rate of fire (see 3.6.5).

3.6.5 Cyclic rate of fire. The cyclic rate of fire for a thirty (30) round continuous burst firing using a 30 round magazine shall be within 700 to 1025 rounds per minute when firing M855, 5.56mm ball cartridges, in accordance with drawing 9342868. The cyclic rate of fire measurement shall be taken on a thirty round burst on any continuous twenty (20) rounds of the function firing automatic (3.6.4.2) verification.

3.6.6 Targeting and accuracy. Ten (10) rounds shall be fired from each weapon at a

MIL-DTL-71186A

target, the heavy outline specified in Figure 1, located at 100 yards. The extreme spread shall be in accordance with Figure 1. The M855, 5.56mm ball cartridges shall be in accordance with drawing 9342868 and shall have an average vertical and horizontal standard deviation between 3.4 inches and 4.0 inches at 600 yards. For each weapon, the target and accuracy measurement shall be taken using rounds number 5 thru 15 of the function firing semi-automatic (see 3.6.4.1) verification.

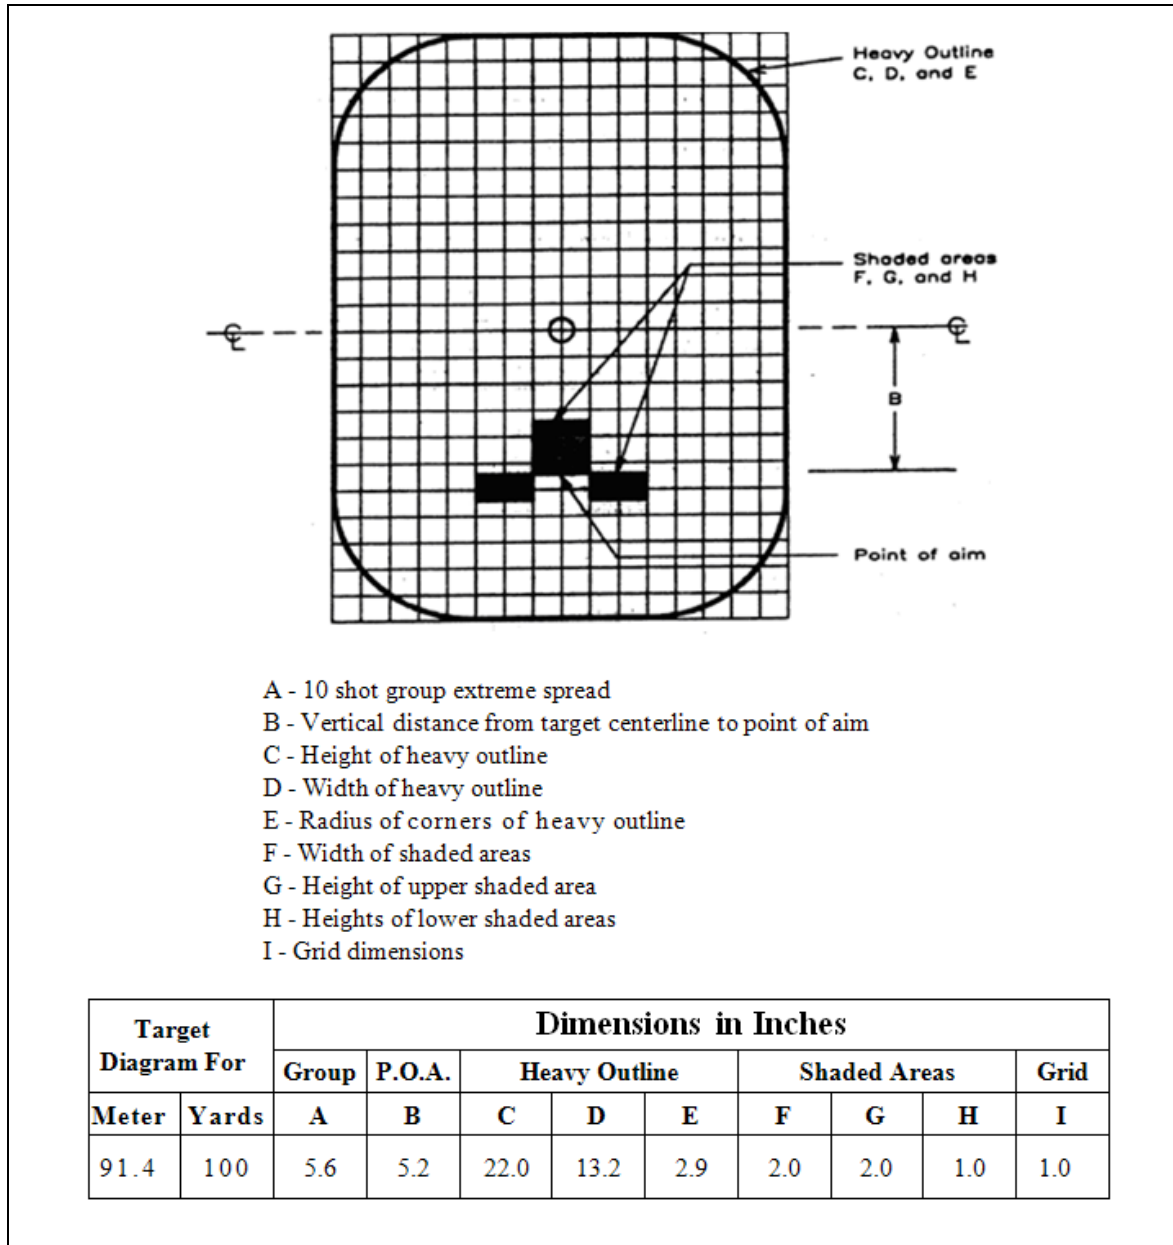


FIGURE 1. Targeting and accuracy diagram

3.6.7 Endurance.

3.6.7.1 Endurance functioning. The weapon shall fire 6,000 rounds of M855, 5.56mm

MIL-DTL-71186A

ball cartridge in accordance with drawing 9342868. There shall be no more than the number of malfunctions and unserviceable parts allowed in Table I.

TABLE I. Malfunctions and unserviceable components

Malfunctions <u>1/</u>	Single Weapon (number permitted in 6000 rounds) <u>7/</u>	Four Weapons (number permitted in 6000 rounds) <u>7/</u>
Failure of bolt to lock <u>2/</u>	2	4
Failure to fire	2	4
Failure to feed (from magazine)	5	10
Failure to eject	3	5
Failure to chamber	3	6
Failure to extract	1	2
Bolts fails/hold rear	2	4
All other malfunctions <u>4/</u>	1	2
Total – Above malfunctions combined	9	22
Unserviceable Parts <u>1/</u>	Minimum Life <u>5/</u> Rounds	Four Weapons <u>6/</u> Combined
Ejector spring	3,000	2
Extractor spring	3,600	4
Bolt ring	1,200	2
Other parts <u>3/</u>	3,000	2
Total unserviceable parts - (above unserviceable parts combined)		5
Notes:		
<p><u>1/</u> All malfunctions and unserviceable parts occurring during the test shall be recorded and properly identified regardless of whether they are chargeable to the weapon. Malfunctions that are traceable to components determined unserviceable after meeting minimum life round requirements may be replaced and charged against the weapon. Once verified that previously recorded malfunctions are attributable to the unserviceable part, they shall not be counted against the weapon provided they occurred within the previous 200 rounds of firing. Malfunctions determined not to be chargeable to the weapon as a result of failure analysis shall be verified and shall not be counted (see 6.4).</p>		
<p><u>2/</u> In the event of any failure of bolt to lock malfunction, the forward assist assembly shall be operated. Failure of the forward assist assembly to remain engaged with the bolt carrier assembly during manual attempt to lock bolt shall be considered an additional malfunction in the category of "other malfunctions".</p>		
<p><u>3/</u> Other parts shall be limited to trigger spring, disconnect springs, hammer spring, extractor pin and extractor.</p>		

MIL-DTL-71186A

TABLE I. Malfunctions and unserviceable components – Continued

4/ Other malfunctions include, but are not limited to: occurrence of doubling (two shots fired with a single trigger pull) during semi-automatic firings; failure to immediately stop firing when the trigger is released (uncontrolled fire) during automatic firing; and failure of forward bolt assist assembly to remain engaged with bolt carrier assembly during manual attempt to lock the bolt, loosening of the nuts securing the carrying handle assemble to the upper receiver, etc.

5/ Minimum life rounds is defined as the minimum service life of an individual part, whether it is the original part or a replacement part, expressed in the number of weapon rounds fired with the part assembled in the weapon. For example, an extractor spring failing prior to firing 3,600 rounds on a new weapon, has not met the minimum life rounds. The failure shall be recorded and shall be cause for test failure.

6/ The allowable number of serviceable parts shown for 4 weapons combined applies only to parts failing after the minimum life rounds have been fired on the weapon. For example, ejector springs failing at 3,500 rounds on one weapon, and 4,100 rounds on a second weapon, fall within the allowable limits of 2 unserviceable parts on 4 weapons combined however, failure of an ejector spring on a third weapon after firing 3,000 rounds which exceeds the allowance, shall be cause for test failure.

7/ Each individual weapon tested shall not exceed the allowable number for each malfunction in the list or the test shall have failed. When the weapon meets the individual allowable malfunctions and exceeds the cumulative total allowable malfunctions for a weapon, the test shall have failed. The combined four weapons tested shall not exceed the allowable number for each malfunction in the list or the test shall have failed. When the weapons meet the combined four weapons allowable malfunctions in the list and exceed the cumulative total allowable malfunctions for four weapons, the test shall have failed.

3.6.7.2 Endurance firing cycle rate. During the endurance functioning test (see 3.6.7.1), the cyclic rate of fire of the each weapon shall be obtained. The cyclic rate of fire of not more than one reading on a single weapon or not more than two readings on four weapons combined shall fall outside of 700 to 1025 rounds per minute. Ammunition used shall be Government standard M855, 5.56mm ball cartridges shall be in accordance with drawing 9342868.

3.6.7.3 Endurance target and accuracy. After completion of the endurance functioning test, each weapon shall be retested for accuracy and shall meet a seven (7) inch extreme spread requirement for a series of 10 rounds fired. Ammunition shall be Government standard M855, 5.56mm ball cartridges in accordance with drawing 9342868, and shall have a vertical and horizontal standard deviation at 600 yards between 3.4 inches and 4.0 inches.

3.6.7.4 Endurance barrel assembly integrity. After completion of the endurance functioning test, the barrel of each weapon shall be free of cracks, seams and other injurious defects, and the bore and chamber shall be free of pockets, rings, bulges and other deformations. The chromium plating in the chamber and bore shall be free of nodules, flaking, pits, stripping, anode burns and evidence of etched base steel. Burrs and sharp edges shall be removed from

MIL-DTL-71186A

chamber edges, and barrel locking lugs. Scratches or marks occurring in a chamber which otherwise meets the surface roughness requirements, shall be permitted.

3.6.7.5 Endurance bolt assembly integrity. After completion of the endurance functioning test, the bolt of each weapon shall be free of cracks, seams and other injurious defects. Burrs and sharp edges shall be removed from chamber edges, and bolt locking lugs.

3.6.7.6 Endurance headspace measurement. Headspace for weapons being fired with 30 round magazines shall be measured and recorded at the beginning of the test and at the completion of the 50th cycle. After the 50th cycle, the headspace shall not be more than .0028 inch greater than the initial measurement and shall not exceed .0024 inch over maximum (1.4706 inches when measured to the 0.330 inches datum diameter on the first shoulder of the chamber).

3.6.7.7 Endurance bolt action indent. After completion of the endurance functioning test, the bolt action indent shall be measured. The bolt is closed and the firing mechanism is released, the firing pin indent shall not be less than 0.020 inches.

3.6.7.8 Endurance muzzle down position indent. After completion of the endurance functioning test, the muzzle down position indent shall be measured. When in a muzzle down position, the bolt carrier assembly shall be released from the full recoil position and the firing mechanism shall not be actuated, the firing pin indent shall not be greater than 0.008 inches.

3.6.7.9 Endurance firing pin indent location. After completion of the endurance functioning test, the firing pin indent location shall be measured. The firing pin indent shall not be off-center more than one half the maximum diameter of the indent.

3.6.7.10 Endurance firing pin protrusion. After completion of the endurance functioning test, the firing pin protrusion shall be measured. The firing pin protrusion shall not be greater than 0.036 inches and shall not be less than 0.028 inches.

3.6.8 Interchangeability. All weapon parts shall be interchangeable, unless otherwise specified, and shall comply with the requirements for headspace, firing pin indent, trigger pull, function firing, cyclic rate of fire, and target and accuracy tests before and after interchange of parts.

3.6.9 Unique Identification (UID). A UID label shall be firmly affixed to the lower receiver assembly in accordance with drawing 12972652. Each weapon shall be identified by a serial number which shall appear on both the side plate of the receiver assembly and on the UID label. The UID label shall not negatively affect the receiver's protective finish and shall withstand all requirements.

3.6.10 Workmanship. Workmanship shall be in accordance with the workmanship requirements of MIL-W-13855 and MIL-W-63150. Finished items and parts shall not exhibit poor material and processing such as seams, laps, laminations, cracks, visible steps, sharp edges, nicks, scratches, burrs, deformations and missing operations which may affect serviceability, functioning, operation, appearance or safety. Fins and other extraneous metal shall be removed

MIL-DTL-71186A

from cast or forged parts.

4. VERIFICATION

TABLE II. Requirement/verification cross-reference matrix

Method of Verification		Classes of Verification						
1 - Analysis 2 - Demonstration 3 - Examination 4 - Test		A - First article inspection B - Conformance lot inspection						
Section 3 Requirement		Verification Methods				Verification Class/Qty.		Section 4 Method
		1	2	3	4	A	B	
3.1	First article inspection	-	-	-	-	-	-	4.2
3.2	Conformance inspection	-	-	-	-	-	-	4.3
3.3.1	Upper receiver and lower receiver assembly retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.3.2	Opening of the upper receiver and lower assembly	-	-	x	-	100% 1/	100% 1/	Table IV
3.3.3	Detachment of the upper receiver assembly from the lower receiver assembly	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.1	Hammer	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.2.1	Automatic sear motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.2.2	Automatic sear action	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.3.1	Fire control selector positions	-	-		-	100% 1/	100% 1/	
3.4.3.2	Fire control selector motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.3.3	Fire control selector position retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.3.4	Fire control selector in SAFE position functioning	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.3.5	Fire control selector in SEMI position functioning	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.3.6	Fire control selector in AUTO position functioning	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.4.1	Bolt catch motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.4.2	Bolt catch retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.4.3	Bolt catch passive action	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.4.4	Bolt catch release	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.5.1	Magazine catch action	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.6.1	Magazine release button action	-	-	x	-	100% 1/	100% 1/	Table IV

MIL-DTL-71186A

TABLE II. Requirement/verification cross-reference matrix – Continued

Section 3 Requirement		Verification Methods				Verification Class/Qty.		Section 4 Method
		1	2	3	4	A	B	
3.4.6.2	Magazine release button and bolt catch interaction	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.7.1	Disconnect motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.7.2	Disconnect action	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.8.1	Trigger hammer cocked position	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.8.2	Trigger normal position upon full trigger pull	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.8.3	Trigger normal position upon partial pull	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.9.1	Trigger guard motion	-	-	x	-	100% 1/	100% 1/	
3.4.9.2	Trigger guard open retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.9.3	Trigger guard closed retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.10.1	Pivot pin motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.10.2	Pivot pin retention in extreme in position	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.10.3	Pivot pin retention in extreme out position	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.11.1	Takedown pin motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.11.2	Takedown pin retention in extreme in position	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.11.3	Takedown pin retention in extreme out position	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.12.1	Pistol grip retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.12.2	Pistol grip position	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.13.1	Buttstock assembly retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.13.2	Buttstock assembly motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.13.3	Buttstock assembly removal	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.14.1	Buffer assembly motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.14.2	Buffer assembly retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.4.14.3	Buffer assembly disassembly from lower receiver	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.1.1	Barrel assembly straightness	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.1.2	Barrel assembly angular deviation	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.2.1	Gas tube retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.2.2	Gas tube alignment	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.3.1	Rail cover mounting	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.3.2	Rail cover retention	-	-	x	-	100% 1/	100% 1/	Table IV

MIL-DTL-71186A

TABLE II. Requirement/verification cross-reference matrix – Continued

Section 3 Requirement		Verification Methods				Verification Class/Qty.		Section 4 Method
		1	2	3	4	A	B	
3.5.4.1	Vertical pistol grip motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.4.2	Vertical pistol grip retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.5.1	Front sight assembly retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.5.2	Front sight post retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.5.3	Front sight post adjustment	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.6.1	Back-up iron sight retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.6.2	Back-up iron sight motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.6.3	Back-up iron sight windage knob position retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.6.4	Back-up iron sight windage knob motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.6.5	Back-up iron sight trajectory compensation	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.7.1	Ejection port cover motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.7.2	Ejection port cover action	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.7.3	Ejection port cover retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.8.1	Forward assist assembly motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.8.2	Forward assist assembly action	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.9	Compensator alignment	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.10.1	Front sling swivel motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.10.2	Front sling swivel retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.11.1	Key and bolt carrier assembly lock	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.11.2.1	Firing pin motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.11.2.2	Firing pin retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.11.2.3	Firing pin protrusion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.11.2.4	Firing pin plating workmanship	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.12	Charging handle retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.1	Bolt assembly motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.2	Bolt assembly retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.3.1	Extractor motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.3.2	Extractor action	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.3.3	Extractor retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.4.1	Ejector motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.4.2	Ejector action	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.4.3	Ejector retention	-	-	x	-	100% 1/	100% 1/	Table IV

MIL-DTL-71186A

TABLE II. Requirement/verification cross-reference matrix – Continued

Section 3 Requirement		Verification Methods				Verification Class/Qty.		Section 4 Method
		1	2	3	4	A	B	
3.5.13.5.1	Cam pin motion	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.5.2	Cam pin retention	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.5.3	Cam pin disassembly	-	-	x	-	100% 1/	100% 1/	Table IV
3.5.13.5.4	Cam pin symmetry	-	-	x	-	100% 1/	100% 1/	Table IV
3.6.1.1	Firing pin indent	-	-	-	x	100%	10 /2, /3	4.5.1.1
3.6.1.2	Bolt action indent	-	-	-	x	100%	10 /2, /3	4.5.1.2
3.6.1.3	Muzzle down position indent	-	-	-	x	100%	10 /2, /3	4.5.1.3
3.6.1.4	Firing pin indent location	-	-	-	x	100%	10 /2, /3	4.5.1.4
3.6.1.5	Firing pin protrusion	-	-	-	x	100%	10 /2, /3	4.5.1.5
3.6.2.1	Minimum trigger pull	-	-	-	x	100%	100%	4.5.2.1
3.6.2.2	Maximum trigger pull	-	-	-	x	100%	100%	4.5.2.2
3.6.2.3	Creep	-	-	-	x	100%	100%	4.5.2.3
3.6.3.1	High pressure resistance test	-	-	-	x	100%	100%	4.5.3.1
3.6.3.2.1	Minimum headspace	-	-	x	-	100%	100%	4.5.3.2.1
3.6.3.2.2	Maximum headspace	-	-	x	-	100%	100%	4.5.3.2.2
3.6.3.3	Barrel assembly integrity	-	-	-	x	100%	100%	4.5.3.3
3.6.3.4	Bolt assembly integrity	-	-	-	x	100%	100%	4.5.3.4
3.6.3.5	High pressure test cartridge integrity	-	-	-	x	100%	100%	4.5.3.5
3.6.4.1	Function firing semi-automatic	-	-	-	x	100%	100%	4.5.4.1
3.6.4.2	Function firing automatic	-	-	-	x	100%	100%	4.5.4.2
3.6.5	Cyclic rate of fire	-	-	-	x	100%	190 4/	4.5.5
3.6.6	Targeting and accuracy	-	-	-	x	100%	100%	4.5.6
3.6.7.1	Endurance functioning	-	-	-	x	4 5/	4 5/	4.5.7.1
3.6.7.2	Endurance firing cycle rate	-	-	-	x	0 6/	0 6/	4.5.7.2
3.6.7.3	Endurance target and accuracy	-	-	-	x	0 6/	0 6/	4.5.7.3
3.6.7.4	Endurance barrel assembly integrity	-	-	-	x	0 6/	0 6/	4.5.7.4
3.6.7.5	Endurance bolt assembly integrity	-	-	-	x	0 6/	0 6/	4.5.7.5
3.6.7.6	Endurance headspace measurement	-	-	-	x	0 6/	0 6/	4.5.7.6
3.6.7.7	Endurance bolt action indent	-	-	-	x	0 6/	0 6/	4.5.7.7
3.6.7.8	Endurance muzzle down position indent	-	-	-	x	0 6/	0 6/	4.5.7.8
3.6.7.9	Endurance firing pin indent location	-	-	-	x	0 6/	0 6/	4.5.7.9

MIL-DTL-71186A

TABLE II. Requirement/verification cross-reference matrix – Continued

Section 3 Requirement		Verification Methods				Verification Class/Qty.		Section 4 Method
		1	2	3	4	A	B	
3.6.7.10	Endurance firing pin protrusion	-	-	-	x	0 6/	0 6/	4.4.7.10
3.6.8	Interchangeability	-	-	-	x	10 2/	10 2/	4.5.8
3.6.9	Unique Identification (UID)	-	-	-	x	100%	100%	4.5.9
3.6.10	Workmanship	-	-	-	x	100%	100%	4.5.10

Notes:

1/ Per 4.2 and 4.3 the results of verification 4.7 shall be used to provide supporting information for this requirement.

2/ Test ten (10) - Accept with zero (0) failures - Reject with one (1) failure. Not applicable for 100% inspections.

3/ If the allocated sample is rejected, double sampling shall be allowed with: Test double sample (2X) - Accept one (1) failure - Reject with two (2) failures. X is defined as the original allocated sample quantity. Not applicable for 100% inspections.

4 1/90 consecutive weapons from the function firing test.

5/ Two (2) weapons which have been through the interchange tests and two (2) weapons which have not been through the interchange tests shall be used for this verification.

6/ Weapons from the endurance functioning test shall be used for this test.

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

- a. First article inspection (see 4.2).
- b. Conformance inspection (see 4.3).

4.2 First article inspection. When specified, a sample of the weapon shall be subjected to all tests in the order specified in Table II. For requirements 3.3.1 through 3.5.13.5.4, Table IV provides rejection criteria and verification.

4.2.1 First article sample. The first article sample shall be representative of the manufacturing methods and processes to be used for quantity production. The first articles shall consist of the quantities specified in Table III unless otherwise specified.

MIL-DTL-71186A

TABLE III. First article sample lot size

NOMENCLATURE	DRAWING	QUANTITY
M4A1 Carbine	12972700	12

4.2.2 First article rejection. If any weapon fails to comply with any of the first article requirements or any drawing requirements, the first article sample shall be rejected.

4.2.2.1 First article rejection examination. Any non-conforming weapon shall be inspected by performing a dimensional, physical, and visual examination, as required, of the weapon and magazine component that are suspected to be the cause of the test failure.

4.3 Conformance inspection. Unless otherwise specified, all weapons shall be subjected to all tests in the order specified in Table II. For requirements 3.3.1 through 3.5.13.5.4, Table IV provides rejection criteria and verification.

4.3.1 Lot size. Unless otherwise specified, an inspection lot shall initially consist of 1,000 weapons or a single month's production, whichever is smaller (see 6.7 and 6.8).

4.3.1.1 Inspection lot formation. The formation and presentation of inspection lots shall be in accordance with MIL-STD-1916.

4.3.2 Lot identification. Each inspection lot shall be identified with a lot number. When a rejected inspection lot is resubmitted after reconditioning, it shall be identified as such.

4.3.3 Conformance procedures. Conformance inspections and tests are specified in the requirement/verification cross-reference matrix, Table II.

4.3.4 Conformance lot inspection rejection. If any weapon fails to comply with any of the conformance lot inspection requirements or any drawing requirements, the inspection lot shall be rejected.

4.3.4.1 Conformance lot inspection rejection examination. Any non-conforming weapon shall be inspected by performing a dimensional, physical, and visual examination, as required, of the weapon and magazine component that are suspected to be the cause of the test failure.

MIL-DTL-71186A

TABLE IV. Classification of defects

Section	Requirement	Rejection	Verification
3.3.1	Upper receiver and lower receiver assembly retention	The sample shall be rejected if the lower receiver and lower receiver disassemble from each other.	steps 1, 2, and 3 of 4.4
3.3.2	Opening of the upper receiver and lower assembly	The sample shall be rejected if the lower receiver does not rotate about the pivot pin and away from the upper receiver.	step 32 of 4.4
3.3.3	Detachment of the upper receiver assembly from the lower receiver assembly	The sample shall be rejected if the upper receiver does not disassemble from the lower receiver.	step 33 of 4.4
3.4.1	Hammer	The sample shall be rejected if the hammer does not move from its normal cocked position to the stop position (under spring action) without binding.	step 11 of 4.4
3.4.2.1	Automatic sear motion	The sample shall be rejected if the automatic sear does not rotate between its neutral and active positions.	steps 42 and 43 of 4.4
3.4.2.2	Automatic sear action	The sample fails if the hammer falls before the sear is tripped.	step 42 of 4.4
3.4.3.1	Fire control selector positions	The sample shall be rejected if the weapon fails to present the safe, semi and auto positions.	step 4 of 4.4
3.4.3.2	Fire control selector motion	The sample shall be rejected if the selector fails to move from one position to the other without binding.	step 8 of 4.4
3.4.3.3	Fire control selector position retention	The sample shall be rejected if the tactile resistances and audible clicks are not observed.	step 8 of 4.4
3.4.3.4	Fire control selector in SAFE position functioning.	The sample shall be rejected if the hammer falls.	step 9 of 4.4
3.4.3.5	Fire control selector in SEMI position functioning.	The sample fails if the hammer does not fall.	step 11 of 4.4

MIL-DTL-71186A

TABLE IV. Classification of defects – Continued

Section	Requirement	Rejection	Verification
3.4.3.6	Fire control selector in AUTO position functioning.	The sample shall be rejected if the hammer does not fall each time the weapon is charged.	step 18 of 4.4
3.4.4.1	Bolt catch motion	The sample shall be rejected if the bolt catch does not move between its recessed position and its fully raised position.	steps 24 and 26 of 4.4
3.4.4.2	Bolt catch retention	The sample shall be rejected if the bolt catch is not retained on the lower receiver.	step 36 of 4.4
3.4.4.3	Bolt catch passive action	The sample shall be rejected if the bolt catch fails to rise and does not retain the bolt carrier in the open position.	step 24 of 4.4
3.4.4.4	Bolt catch release	The sample shall be rejected if the bolt catch does not recess and allow the bolt carrier to return to the battery position.	step 26 of 4.4
3.4.5.1	Magazine catch action	The sample shall be rejected if the magazine is released or an audible click is not observed.	step 21 of 4.4
3.4.5.2	Magazine catch tension adjustment	The sample shall be rejected if the tactile resistance does not increase.	step 28 of 4.4
		The sample shall be rejected if the tactile resistance does not decrease.	step 30 of 4.4
3.4.6.1	Magazine release button action	The sample shall be rejected if the magazine is not released.	step 27 of 4.4
3.4.6.2	Magazine release button and bolt catch interaction	The sample shall be rejected if the empty magazine is not ejected.	step 25 of 4.4
3.4.7.1	Disconnect motion	The sample shall be rejected if the disconnect does not rotate between its neutral and active positions.	step 40 of 4.4
3.4.7.2	Disconnect action	The sample shall be rejected if the hammer falls.	steps 13 of 4.4
3.4.8.1	Trigger hammer cocked position	The sample shall be rejected if the hammer falls.	step 13 and 17 of 4.4

MIL-DTL-71186A

TABLE IV. Classification of defects – Continued

Section	Requirement	Rejection	Verification
3.4.8.2	Trigger normal position upon full trigger pull	The sample shall be rejected if the trigger does not return to its normal forward position.	step 14 of 4.4
3.4.8.3	Trigger normal position upon partial pull	The sample shall be rejected if the trigger does not return to the normal forward position.	step 15 of 4.4
3.4.9.1	Trigger guard motion	The sample shall be rejected if the trigger guard does not move between it closed and fully open position or binding occurs.	steps 37 and 39 of 4.4
3.4.9.2	Trigger guard open retention	The sample shall be rejected if the trigger guard moves.	step 38 of 4.4
3.4.9.3	Trigger guard closed retention	The sample shall be rejected if the trigger guard opens.	steps 1, 2, and 3 of 4.4
3.4.10.1	Pivot pin motion	The sample shall be rejected if the pivot pin fails to move between the two positions or binding occurs.	step 34 of 4.4
3.4.10.2	Pivot pin retention in extreme in position	The sample shall be rejected if the pivot pin moves.	step 2 of 4.4
3.4.10.3	Pivot pin retention in extreme out position	The sample shall be rejected if the pivot pin moves.	step 36 of 4.4
3.4.11.1	Takedown pin motion	The sample shall be rejected if the takedown pin fails to move between the two positions or binding occurs.	step 35 of 4.4
3.4.11.2	Takedown pin retention in extreme in position	The sample shall be rejected if the takedown pin moves.	step 2 of 4.4
3.4.11.3	Takedown pin retention in extreme out position	The sample shall be rejected if the takedown pin moves.	step 36 of 4.4
3.4.12.1	Pistol grip retention	The sample shall be rejected if the pistol grip detaches from the lower receiver.	step 1, 2, and 3 of 4.4
3.4.12.2	Pistol grip position	The sample shall be rejected if the pistol grip interferes with the fire control selector motion.	step 8 of 4.4

MIL-DTL-71186A

TABLE IV. Classification of defects – Continued

Section	Requirement	Rejection	Verification
3.4.13.1	Buttstock assembly retention	The sample shall be rejected if the buttstock rotates about the lower receiver extension.	steps 55 of 4.4
		The sample shall be rejected if forward or rearward movement is detected beyond the extended and retracted positions.	step 50, 51, 52 and 53 of 4.4
3.4.13.2	Buttstock assembly motion	The sample shall be rejected if the buttstock assembly fails to move between its retracted and extended positions.	steps 49 of 4.4
3.4.13.3	Buttstock assembly removal	The sample shall be rejected if the buttstock assembly fails to disassemble from the lower receiver extension	step 54 of 4.4
3.4.14.1	Buffer assembly motion	The sample shall be rejected if the buffer assembly fails to move between the retained and the fully compressed positions or binding occurs. The sample shall fail if movement from compressed to retained is not caused by spring action.	step 46 of 4.4
3.4.14.2	Buffer assembly retention	The sample shall be rejected if the buffer assembly detaches from the lower receiver.	step 46 of 4.4
3.4.14.3	Buffer assembly disassembly from lower receiver	The sample shall fail if the buffer assembly fails to disassemble from the lower receiver.	step 47 of 4.4
3.5.1.1	Barrel assembly straightness	The sample shall be rejected if the bore straightness gage does not pass freely through the bore, when dropped from the muzzle end.	step 89 of 4.4
		The sample shall be rejected if the bore straightness gage does not pass freely through the bore, when dropped from the chamber end.	step 89 of 4.4
3.5.1.2	Barrel assembly angular deviation	The sample shall be rejected if the angular deviation of the barrel is greater than zero degrees and three minutes ($0^{\circ} 3'$).	step 90 of 4.4

MIL-DTL-71186A

TABLE IV. Classification of defects – Continued

Section	Requirement	Rejection	Verification
3.5.2.1	Gas tube retention	The sample shall be rejected if the gas tube is not retained in the front sight assembly.	step 1 of 4.4
3.5.2.2	Gas tube alignment	The sample shall be rejected if the gas tube hits the bolt carrier key, or if the gas tube binds in the bolt carrier key.	step 70 of 4.4
3.5.3.1	Rail cover mounting	The sample shall be rejected if the rail covers do not slide on and off the rail adaptor system when the retaining clips are depressed.	step 63 of 4.4
3.5.3.2	Rail cover retention	The sample shall be rejected if the rail covers disassemble from the rail adaptor system.	steps 1, 2, and 3 of 4.4
3.5.4.1	Vertical pistol grip motion	The sample shall be rejected if the vertical pistol grip does not move from one end to the other of the rail cover or binding occurs.	step 61 of 4.4
3.5.4.2	Vertical pistol grip retention	The sample shall be rejected if the vertical pistol grip disassembles from the rail adaptor system.	steps 1, 2, and 3 of 4.4
3.5.5.1	Front sight assembly retention	The sample shall be rejected if the front sight assembly disassembles from the barrel.	steps 1, 2, and 3 of 4.4
3.5.5.2	Front sight post retention	The sample shall be rejected if the front sight post disassembles from the front sight assembly.	steps 1, 2, and 3 of 4.4
3.5.5.3	Front sight post adjustment	The sample shall be rejected if the front sight post does not lower or less than 16 clicks are observed.	step 60 of 4.4
3.5.6.1	Back-up iron sight retention	The sample shall be rejected if the back-up iron sight disassembles from the upper receiver.	steps 1, 2, and 3 of 4.4
3.5.6.2	Back-up iron sight motion	The sample shall be rejected if the rear sight does not pivot to a full vertical position.	step 65 of 4.4

MIL-DTL-71186A

TABLE IV. Classification of defects – Continued

Section	Requirement	Rejection	Verification
3.5.6.3	Back-up iron sight windage knob position retention	The sample shall be rejected if the windage knob changes position.	steps 1, 2, and 3 of 4.4
3.5.6.4	Back-up iron sight windage knob motion	The sample shall be rejected if the back-up iron sight does not move from extreme left to extreme right (after 7 complete revolutions) or binding occurs.	step 66 of 4.4
3.5.6.5	Back-up iron sight trajectory compensation	The sample shall be rejected if the rear sight does not elevate.	step 67 of 4.4
3.5.7.1	Ejection port cover motion	The sample shall be rejected if the ejection port cover fails to move between the closed and open positions or binding occurs.	step 6 of 4.4
3.5.7.2	Ejection port cover action	The sample shall fail if the ejection port cover fails to open (Rearward)	step 5 of 4.4
		The sample shall fail if the ejection port cover fails to open (Forward)	step 7 of 4.4
3.5.7.3	Ejection port cover retention	The sample shall be rejected if the ejection port cover fails to stay closed.	steps 1, 2, and 3 of 4.4
3.5.8.1	Forward assist assembly motion	The sample shall be rejected if the forward assist assembly fails to engage the bolt carrier or fails to return, under spring action, to its fully outward position.	step 56 of 4.4
3.5.8.2	Forward assist assembly action	The sample shall be rejected if the bolt carrier fails to reach the battery position.	step 57 of 4.4
3.5.9	Compensator alignment	The sample shall be rejected if no portion of the middle slot coincides with TDC line.	step 58 of 4.4
3.5.10.1	Front sling swivel motion	The sample shall be rejected if the front swivel does not move from between its forward position and rear position or binding occurs.	step 59 of 4.4
3.5.10.2	Front sling swivel retention	The sample shall be rejected if the front swivel disassembles from the front sight assembly.	steps 1, 2, and 3 of 4.4

MIL-DTL-71186A

TABLE IV. Classification of defects – Continued

Section	Requirement	Rejection	Verification
3.5.11.1	Key and bolt carrier assembly lock	The sample shall be rejected if the key and bolt assembly does not lock.	step 69 of 4.4
3.5.11.2.1	Firing pin motion	The sample shall be rejected if the firing pin does not move from its recessed position to a maximum protrusion of 0.028 inches.	step 73 of 4.4
3.5.11.2.2	Firing pin retention	The sample shall be rejected if the firing pin disassembles from the bolt assembly.	step 72 of 4.4
3.5.11.2.3	Firing pin protrusion	The sample shall fail if the firing pin protrusion is greater than 0.036 in or less than 0.0028 in.	step 74 of 4.4
3.5.11.2.4	Firing pin plating workmanship	The sample shall be rejected if the plating shows evidence of nodules, flaking, stripping, anode burns and evidence of etched base steel, except as specified on the applicable drawing 8448503.	step 82 of 4.4
3.5.12	Charging handle retention	The sample shall be rejected if the charging handle moves without pressing the charging handle release.	step 3 of 4.4
3.5.13.1	Bolt assembly motion	The sample shall be rejected if the key and bolt assembly does not lock.	step 69 and 70 of 4.4
3.5.13.2	Bolt assembly retention	The sample shall be rejected if the bolt assembly detaches from the bolt carrier assembly.	step 78 of 4.4
3.5.13.3.1	Extractor motion	The sample shall be rejected if the extractor fails to move between its rest and active positions or binding occurs.	step 22 of 4.4
3.5.13.3.2	Extractor action	The sample shall be rejected if the dummy round is not extracted from the chamber.	step 22 of 4.4
3.5.13.3.3	Extractor retention	The sample shall be rejected if the extractor disassembles from the bolt carrier assembly	step 85 of 4.4

MIL-DTL-71186A

TABLE IV. Classification of defects – Continued

Section	Requirement	Rejection	Verification
3.5.13.4.1	Ejector motion	The sample shall be rejected if the ejector fails to move between its recessed and raised positions or binding occurs.	step 22 of 4.4
3.5.13.4.2	Ejector action	The sample shall be rejected if the dummy round is not ejected from the weapon.	step 22 of 4.4
3.5.13.4.3	Ejector retention	The sample shall be rejected if the ejector disassembles from the bolt assembly.	step 84 of 4.4
3.5.13.5.1	Cam pin motion	The sample shall be rejected if the cam pin fails to move through the cam pin area causing the bolt carrier assembly to lock.	step 75 and 77 of 4.4
3.5.13.5.2	Cam pin retention	The sample shall be rejected if the cam pin disassembles from the bolt carrier assembly.	step 76 of 4.4
3.5.13.5.3	Cam pin disassembly	The sample shall be rejected if the cam pin does not disassemble from the bolt carrier assembly without removing the key.	step 82 of 4.4
3.5.13.5.4	Cam pin symmetry	The sample shall be rejected if the bolt carrier does not lock.	step 88 of 4.4

MIL-DTL-71186A

4.4 Weapon sequential verification procedure.

- a. Setup: Weapon shall be fully assembled with rail covers, vertical pistol grip and backup iron sight securely retained. Ejection port cover shall be in the closed position. No magazine shall be installed. Bolt assembly shall be in the battery position (see 6.10.11). Hammer shall be forward. The fire control selector shall be at the “SAFE” position. The weapon shall be clear of ammunition. Weapon shall be zeroed per the Operator’s Manual 9-1005-319-10.
- b. Verification shall be performed as follows:
 1. Hold the weapon horizontal to the floor with its ejection port perpendicular to the floor. For 10 seconds, move the weapon straight up and down over a 2-foot distance (a total of four feet for a round trip), at a speed of 4 feet per second. No components shall disassemble from the weapon during this step. No restrained components shall move from their restrained position during this step. Pay special attention that the gas tube has not been released.
 2. Repeat step 1, but the weapon shall be held with its ejection port parallel to and facing the floor. No components shall disassemble from the weapon during this step. No restrained components shall move from their restrained position during this step.
 3. Repeat step 1, but the weapon shall be held down with its ejection port perpendicular to the floor. No components shall disassemble from the weapon during this step. No restrained components shall move from their restrained position during this step.
 4. Visually examine the lower receiver for the presence of a fire control selector with three positions; SAFE, SEMI and AUTO.
 5. Pull charging handle assembly to the rear and hold. The ejection port cover shall open. (Ejection port cover action – rearward)
 6. Once released, the ejection port cover shall come to rest against the lower receiver under spring action. There shall be no binding. (Ejection port cover motion) Manually rotate the ejection port cover to the closed position. There shall be no binding. (Ejection port cover motion)
 7. Release the charging handle. The ejection port cover shall open. (Ejection port cover action – forward)
 8. Manually rotate the fire control selector from “SAFE”, to “SEMI”, to “AUTO”, to “SEMI”, and then to the “SAFE” position. There shall be no binding. A tactile resistance and an audible click shall be observed when arriving and achieving each position, respectively. (Fire control selector motion and position retention) Ensure that the pistol grip does not interfere with the fire control selector motion. (Pistol grip

MIL-DTL-71186A

- position)
9. Pull the trigger. The hammer shall not fall (see 6.10.6). (Fire control selector in SAFE position functioning)
 10. Place the fire control selector in the "SEMI" position. Charge (see 6.10.7) the weapon. The hammer shall not fall.
 11. Pull the trigger and hold to the rear. The hammer shall fall (see 6.10.5). (Fire control selector in SEMI position functioning, hammer)
 12. Charge the weapon.
 13. The hammer shall not fall. (Disconnect action) Slowly ($\frac{1}{4}$ to $\frac{1}{2}$ the rate of normal trigger release) release the trigger until the trigger is fully forward. An audible click shall be heard as the hammer transfers from the disconnect to the trigger. The hammer shall not fall. (Trigger hammer cocked position)
 14. Pull the trigger. Charge the weapon. The trigger shall return to its normal position. (Trigger normal position upon full trigger pull)
 15. Partially pull the trigger and release. The trigger shall return to its normal position. (Trigger normal position upon partial trigger pull)
 16. Place the fire control selector in the "AUTO" position, pull the trigger and hold it to the rear, and then charge the weapon thirty times.
 17. Release the trigger. The hammer shall not fall. (Trigger hammer cocked position)
 18. Pull the trigger and hold to the rear again. The hammer shall fall. Charge the weapon thirty times. The hammer shall fall each time the weapon is charged. (Fire control selector in AUTO position functioning)
 19. Release the trigger.
 20. Place the fire control selector in the "SEMI" position.
 21. Insert a magazine with one dummy round into the weapon until an audible click is heard. Once the click is heard, apply downward pressure on the magazine. The magazine shall not be released. (Magazine catch action)
 22. Charge the weapon. The dummy round shall be stripped from the magazine.
 23. Pull the charging handle to the rear and hold to the rear. The dummy round shall be extracted and then ejected. (Extractor action, extractor motion, ejector action, ejector motion)

MIL-DTL-71186A

24. The bolt catch shall rise as the now empty magazine's magazine follower engages and raises the bolt catch. Release the charging handle. The bolt catch shall retain the bolt carrier assembly. (Bolt catch passive action, bolt catch motion – raised)
25. Press and hold the magazine release button. The magazine shall be ejected. (Magazine release and bolt catch interaction)
26. Press the bolt catch release. The bolt catch shall move to its retracted position. The bolt shall return to the battery position. (Bolt catch release, bolt catch motion – retracted)
27. Insert an empty magazine into the weapon and observe the tactile resistance that is felt when overcoming the magazine catch (instrumentation may be used to measure this). Press the magazine release. The magazine shall be released. (Magazine release button action).
28. Press in on the magazine catch button until the left side of the magazine catch button sticks out beyond the receiver. Rotate the magazine catch clockwise. Release the magazine catch button. Re-insert the empty magazine into the weapon and observe the tactile resistance that is felt when overcoming the magazine catch. The tactile resistance shall be harder to overcome than before (instrumentation may be used to measure this). (Magazine catch tension adjustment – increase)
29. Press the magazine release. The magazine shall be released.
30. Press in on the magazine catch button until the left side of the magazine catch button sticks out beyond the receiver. Rotate the magazine catch counter clockwise. Release the magazine catch button. Re-insert the empty magazine into the weapon and observe the tactile resistance that is felt when overcoming the magazine catch. The tactile resistance shall be easier to overcome than before (instrumentation may be used to measure this). (Magazine catch tension adjustment – decrease)
31. Press the magazine release. The magazine shall be released.
32. The takedown pin shall be moved to its extreme out position. While holding the upper receiver, apply a downward pressure to the pistol grip. The lower receiver shall rotate about the pivot pin opening the upper and lower receiver assembly. (Opening of the upper receiver and lower receiver assembly)
33. The pivot pin shall be moved to its extreme out position. Pull the lower receiver assembly away from the upper receiver assembly. The receivers shall detach from each other. (Detachment of the upper receiver assembly from the lower receiver assembly)
34. Move the pivot pin from its extreme out position to its extreme in position. There

MIL-DTL-71186A

- shall be no binding. Move the pivot pin from its extreme in position to its extreme out position. There shall be no binding. (Pivot pin motion)
35. Move the takedown pin from its extreme out position to its extreme in position. There shall be no binding. Move the takedown pin from its extreme in position to its extreme out position. There shall be no binding. (Takedown pin motion)
 36. Hold the lower receiver horizontal to the floor with its ejection port parallel to and facing the floor. For 10 seconds, move the weapon straight up and down over a 2-foot distance (a total of four feet for a round trip), at a speed of 4 feet per second. The pivot pin shall not move from its extreme out position. (Pivot pin retention in extreme out position). The takedown pin shall not move from its extreme out position. (Takedown pin retention in extreme out position) (Bolt catch retention)
 37. Depress the trigger guard plunger and open the trigger guard until it is fully open and resting on the pistol grip. There shall be no binding (Trigger guard motion – opening)
 38. For 15 seconds, hold the lower receiver buttstock up. The trigger guard shall not move from its fully open position. (Trigger guard open retention)
 39. Depress the trigger guard plunger and manually rotate the trigger guard back to its fully closed position. There shall be no binding. (Trigger guard motion – closing)
 40. Compress the hammer and hold. Visually inspect that the disconnect does not engage the hammer. (Disconnect motion – neutral). Pull trigger and hold. Release the hammer. The hammer shall be restrained by the disconnect. (Disconnect motion – active)
 41. Release the trigger. Place the fire control selector in the “AUTO” position.
 42. Compress the hammer and release. There shall be no binding. The hammer shall be restrained by the automatic sear. The hammer shall not fall. (Automatic sear action, automatic sear – active)
 43. Compress the hammer and hold. Push the automatic sear forward and hold. Release the hammer. The automatic sear shall not engage the hammer. (Automatic sear – neutral).
 44. Pull the trigger and hold.
 45. Release the automatic sear. Place the fire selector in the “SAFE” position.
 46. Depress the buffer assembly until it contacts the rear of the lower receiver extension and release. Repeat this five times. The buffer shall return to its initial retained position. (Buffer assembly motion) Each time the buffer assembly is released from

MIL-DTL-71186A

- its compressed position and returns to its retained position, it shall not detach from the lower receiver. (Buffer assembly retention)
47. Compress the buffer assembly 1 inch and hold in place. Manually depress the spring loaded buffer retainer and hold it down. Slowly release the compressed buffer assembly until it overcomes the spring loaded buffer retainer position and disassembles from the lower receiver. (Buffer assembly disassembly)
 48. Manually depress the spring loaded buffer retainer and hold it down. Slowly insert the buffer assembly until it overcomes the spring loaded buffer retainer position. Release the spring loaded buffer retainer. Release the buffer assembly. It shall be retained.
 49. When the buttstock release lever is depressed, the buttstock assembly shall be free to slide on the lower receiver extension between the extended and retracted position. Depress the buttstock release lever and slide the buttstock assembly to its retracted position and back to its extended position. There shall be no binding. (Buttstock assembly motion)
 50. Depress the buttstock lever and move the buttstock into the retracted position. Release the lever. Manually attempt to push the buttstock towards the lower receiver (hold firmly in place). There shall be no forward movement of the buttstock assembly. (Buttstock assembly retention – retracted – forward)
 51. Manually attempt to pull the buttstock away from the lower receiver. There shall be no rearward movement of the buttstock assembly. (Buttstock assembly retention – retracted – rearward)
 52. Depress the buttstock lever and move the buttstock into the extended position. Release the lever. Manually attempt to push the buttstock towards the lower receiver (hold firmly in place). There shall be no forward movement of the buttstock assembly. (Buttstock assembly retention – extended – forward)
 53. Manually attempt to pull the buttstock away from the lower receiver. There shall be no rearward movement of the buttstock assembly. (Buttstock assembly retention – extended – rearward)
 54. Depress the buttstock lever and pull the buttstock rearward off the lower receiver extension. (Buttstock assembly removal)
 55. Manually attempt to rotate the buttstock around the lower receiver extension. (Buttstock assembly retention – rotation)
 56. Ensure that the bolt carrier assembly is in the battery position. Depress the forward assist assembly until the pawl engages the bolt carrier. Release the forward assist assembly. The forward assist shall return, under spring action, to its fully outward

MIL-DTL-71186A

- position. The pawl shall now be disengaged from the bolt carrier. (Forward assist assembly motion)
57. Using the charging handle assembly, retract the bolt carrier assembly about one-fourth of an inch, as determined from the front of the bolt carrier to the front of the receiver ejection port. Repeatedly depress and release the forward assist assembly until the bolt carrier progresses to the battery position. (Forward assist assembly action)
 58. Visually inspect that some portion of the compensator's third slot (middle slot) aligns with the Top Dead Center (TDC). (Compensator alignment)
 59. Manually rotate the front swivel between its forward position to its rear position and back. There shall be no binding. (Front sling swivel motion)
 60. Depress the front sight detent and turn the front sight post clockwise. The front sight post shall lower. The detent shall pop into the next front sight post slot. Repeat the previous step 16 more times. Each time the front sight post is turned the front sight post shall lower. (Front sight post adjustment).
 61. Unlock the vertical pistol grip from the rail adaptor system. Slide the vertical pistol grip all the way forward and all the way back on the rail. There shall be no binding. (Vertical pistol grip motion)
 62. Remove the vertical pistol grip from the weapon.
 63. For each rail cover, depress its retaining clip and slide it off the rail adaptor system. For each rail cover, depress its retaining clip and slide it onto the appropriate rail until the retaining clip automatically engages, locking the rail cover in place. (Rail cover mounting)
 64. For each rail cover, depress its retaining clip and slide it off the rail adaptor system. Remove the rail adapter system in accordance with the Operator's Manual 9-1005-319-10.
 65. Rotate the windage knob to move the rear sight to the extreme left. The rear sight shall pivot to the full vertical position under spring action. Rotate the windage knob to move the rear sight to the extreme right. The rear sight shall pivot to the full vertical position under spring action. (Back-up iron sight motion)
 66. Rotate the windage knob seven complete revolutions, moving the rear sight from the extreme left to the extreme right without binding. (Back-up iron sight windage knob motion)
 67. Elevate the rear sight by means of the sight cam, to compensate for trajectory for ranges from 200 meters to 600 meters. (Back-up iron sight trajectory compensation)

MIL-DTL-71186A

68. Hold the upper receiver muzzle down. Pull the charging handle to the rear. Hold the bolt carrier assembly to the rear and push charging handle forward.
69. Release the bolt carrier assembly into the upper receiver. The bolt carrier assembly shall lock into the chamber. (Key and bolt carrier assembly lock, bolt assembly motion)
70. Slide the bolt carrier assembly back and forth in the upper receiver to ensure that the gas tube is aligned with the key. There shall be no binding. (Bolt assembly motion, gas tube alignment)
71. Pull charging handle to the rear. Remove bolt carrier assembly.
72. Orient the bolt carrier assembly vertical, so that the locking lugs are skyward. The firing shall not drop out of the bolt assembly. (Firing pin retention)
73. Orient the bolt assembly vertical with the bolt face, facing skyward. Verify that the firing pin is recessed. (Firing pin motion)
74. Measure the firing pin protrusion using approved SM&TE with the firing pin in the fired position as specified in accordance with drawing 13004788. (Firing pin protrusion)
75. Push in (rearward) on the bolt assembly until it is in the locked position. The cam pin shall move with the bolt assembly without binding. (Cam pin motion – rearward)
76. Attempt to remove the cam pin from the bolt carrier assembly. The cam pin shall not disassemble due to the firing pin being in place. (Cam pin retention)
77. Move bolt assembly forward to the unlocked position and remove the firing pin retaining pin. The cam pin shall move with the bolt assembly without binding. (Cam pin motion – forward)
78. Orient the bolt carrier assembly vertical, so that the locking lugs are downward. The bolt assembly shall not disassemble from the bolt carrier assembly due to the cam pin being in place. (Bolt assembly retention)
79. Push in (rearward) on the bolt assembly until it is in the locked position.
80. Orient the bolt carrier assembly vertical, so that the locking lugs are skyward. Catch the firing pin as it drops out of the rear of the bolt carrier assembly.
81. Visually inspect the firing pin chromium plating for any nodules, flaking, stripping, anode burns or evidence of etched base steel. (Firing pin plating workmanship)

MIL-DTL-71186A

82. Verify that bolt assembly is in locked position. Note which face of the cam pin is perpendicular to the firing pin and facing towards the locking lugs. Turn the cam pin 90 degrees and then pull it out of the bolt carrier assembly. (Cam pin disassembly)
83. Remove the bolt assembly from the bolt carrier assembly.
84. Hold the bolt assembly perpendicular to the floor with the ejector face downward. For 10 seconds, move the bolt assembly straight up and down over a 2-foot distance (a total of four feet for a round trip), at a speed of 4 feet per second. No components shall disassemble from the bolt during this step. (Ejector retention)
85. Hold the bolt assembly parallel to the floor with the extractor facing downward. For 10 seconds, move the bolt assembly straight up and down over a 2-foot distance (a total of four feet for a round trip), at a speed of 4 feet per second. No components shall disassemble from the bolt during this step. (Extractor retention)
86. Reassemble the bolt carrier assembly with the cam pin inverted with respect to default position (see step 84).
87. Hold the upper receiver muzzle down. Pull the charging handle to the rear. Insert the bolt carrier assembly into the upper receiver and hold to the rear.
88. Release the bolt carrier assembly into the upper receiver. The bolt carrier assembly shall lock into the chamber. (Cam pin symmetry) Pull the charging handle to the rear and remove bolt carrier assembly.
89. Check barrel straightness with gage 8448202 by dropping the gage from the muzzle end and then the bore end of the barrel. The gage shall pass freely through the barrel from both directions. (Barrel assembly straightness)
90. Insert a self aligning plug into the bore end of the barrel and measure any angular deviation of the barrel, if any. (Barrel assembly angular deviation)

4.5 Functional characteristics.

4.5.1 Firing pin indents.

4.5.1.1 Firing pin indent. The firing pin indent shall be measured utilizing gage indicator in accordance with drawing 8440218, plug gage in accordance with drawing 8440219, plug gage in accordance with drawing 8440220, and copper compression cylinders in accordance with drawing 8440920 for insertion in the barrel chamber.

4.5.1.2 Bolt action indent. The bolt shall be retracted to the open rearward position and held open. A zero indicator reading shall be made on the height of the copper compression cylinder before insertion into the chamber adapter. The chamber adapter containing the copper compression cylinder shall then be inserted in the barrel chamber. The bolt shall be manually

MIL-DTL-71186A

returned to the battery position, the trigger shall be pulled to release the hammer and indent the copper compression cylinder. The chamber adapter shall be removed from the barrel chamber and the depth of the indent on the copper compression cylinder computed by measuring the distance from the original zero indicator reading to the bottom of the firing pin impression.

4.5.1.3 Muzzle down position indent. The weapon shall be held in a muzzle down position with the muzzle end supported. The bolt shall be retracted to the rearward position and held open. A zero indicator reading shall be made on the height of the copper pressure cylinder before insertion into the chamber adapter. The chamber adapter containing the copper compression cylinder shall then be inserted into the barrel chamber. The bolt shall be returned to the battery position under spring action. The trigger shall not be pulled. The chamber adapter shall be removed from the barrel chamber and the depth of the indent in the copper compression cylinder computed by measuring the distance from the original zero indicator reading to the bottom of the firing pin impression. The indent impression shall be visually examined to determine if the concentricity requirement has been met.

4.5.1.4 Firing pin indent location. The firing pin indent position on pressure cylinder shall be measured using approved Standard Measuring & Testing Equipment (SM&TE).

4.5.1.5 Firing pin protrusion. The firing pin protrusion shall be tested using approved SM&TE with the firing pin in the fired position as specified in accordance with drawing 13004788.

4.5.2 Trigger pull.

4.5.2.1 Minimum trigger pull.

- a. Clear the weapon. Place selector to AUTO. Pull the trigger and hold it to the rear. Pull the charging handle to the rear and return to the bolt closed position thirty times
- b. Release the trigger. Place the selector to SEMI. Hold the weapon in the vertical position. Using trigger pull measuring fixture, 7274758, gradually add 5.5 lbs (2.49 kg) to the center of the trigger and exerted in line parallel to the axis of the barrel bore. To be acceptable, the hammer shall not release.

4.5.2.2 Maximum trigger pull.

- a. Clear the weapon. Place selector to AUTO. Pull the trigger and hold it to the rear. Pull the charging handle to the rear and return to the bolt closed position thirty times.
- b. Release the trigger. Place the selector to SEMI. Hold the weapon in the vertical position. Using trigger pull measuring fixture, 7274758, gradually add 9.5 lbs (4.31 kg) to the center of the trigger and exerted in line parallel to the axis of the barrel bore. To be acceptable, the hammer shall release.

4.5.2.3 Creep. The weapon shall also be manually tested to assure that the trigger pull is

MIL-DTL-71186A

free of creep (see 3.6.2.3) and that the trigger returns under spring action to its normal forward position after partial or complete trigger pull.

4.5.3 High pressure resistance.

4.5.3.1 High pressure resistance test. One M197, 5.56mm high pressure test cartridge in accordance with drawing 10533839 or commercial equivalent conforming to SAAMI-Z299.2 shall be fired in each bolt in accordance with drawing 8448510 and barrel assembly in accordance with drawing 12991850.

4.5.3.2 Headspace.

4.5.3.2.1 Minimum headspace. After the high pressure resistance test (see 4.5.3.1), the bolt shall be moved rearward to the open position. The gage in accordance with drawing 8443915 shall be inserted in the chamber and the bolt shall be returned to the battery position. Only finger pressure shall be applied to close the bolt. To be acceptable the bolt shall fully close.

4.5.3.2.2 Maximum headspace. After the high pressure resistance test (see 4.5.3.1), the bolt shall then be retracted to the open position. The gage in accordance with drawing 8443949 shall be inserted in the chamber and the bolt returned to the battery position. Only finger pressure shall be used to close the bolt. To be acceptable the bolt shall not fully close.

4.5.3.3 Barrel assembly integrity. After the high pressure resistance test (see 4.5.3.1), the barrel assembly shall be magnetic particle inspected in accordance with ASTM E1444 utilizing a current of 400 to 500 amperes for circular continuous magnetization. The barrel assembly shall be examined for evidence of cracks, seams and other injurious defects.

4.5.3.4 Bolt assembly integrity. After the high pressure resistance test (see 4.5.3.1), the bolt shall be magnetic particle inspected in accordance with ASTM E1444 utilizing standard five turn magnetizing coil with a current of 200 to 300 amperes. Both circular and longitudinal continuous magnetization with wet fluorescent solution shall be used. The bolts shall be examined for evidence of cracks, seams and other injurious defects.

4.5.3.5 High pressure test cartridge integrity. Visually examine the test cartridge for presence of bulges, splits, rings and other defects.

4.5.3.6 Proof marking. After the high pressure resistance test (see 4.5.3.1), visually examine bolt and barrel assemblies that have passed high pressure resistance test for the presence of proof markings and magnetic particle inspection markings.

4.5.4 Function firing.

4.5.4.1 Function firing semi-automatic. Each weapon shall be fired in accordance with the Operator's Manual 9-1005-319-10 and shall be held in a firing stand simulating shoulder firing per 11837943 (semi-automatic/targeting and accuracy firing), using ammunition M855, 5.56mm ball cartridges in accordance with drawing 9342868.

MIL-DTL-71186A

4.5.4.2 Function firing automatic. Each weapon shall be fired in accordance with the Operator's Manual 9-1005-319-10 and shall be held in a firing stand simulating shoulder firing in accordance with drawing 11837945 (automatic firing), using ammunition M855, 5.56mm ball cartridges in accordance with drawing 11837945. The selector lever shall be set on "AUTO" for continuous burst firing. The M4A1 shall be fired using a fully loaded 30 round magazine fired in a continuous burst. Failure of the carbine to stop firing during the interrupted burst firing upon release of the trigger shall be cause for rejection and recorded malfunction.

4.5.5 Cyclic rate of fire. The cyclic rate of fire measurement shall be taken during the function firing auto test (see 4.5.4.2) occurring on a minimum twenty (20) round continuous burst from a 30 round magazine, while the selector lever is set on "AUTO". The cyclic rate of fire shall be measured using test equipment in accordance with drawing 8443572 and shall be recorded.

4.5.6 Target and accuracy. Target and accuracy measurements shall be taken during rounds 5 thru 15 of the function firing and semi-automatic test see (4.5.4.1)

4.5.6.1 Preparation for firing. The front and rear sights shall be set as specified in accordance with the Operator's Manual 9-1005-319-10.

4.5.6.2 Warm-up shots. No more than five warm-up shots, off the test target, shall be allowed before the weapons are tested for targeting and accuracy.

4.5.6.3 Firing procedure. The selector lever shall be set on "SEMI" and the firing sights shall be aligned on the point of aim specified in Figure 1. The allocated number of rounds shall be fired and then the target shall be checked to determine that the targeting and accuracy requirements have been met (see 3.6.5 and Figure 1). Targets with evidence of a flyer (see 6.10.1) or keyholing (see 6.10.2) shall be cause to repeat the test by firing a ten round complement.

4.5.6.4 Firing procedure. The selector lever shall be set on "SEMI" and the firing sights shall be aligned on the point of aim specified in Figure 1. The allocated number of rounds shall be fired and then the target shall be checked to determine that the targeting and accuracy requirements have been met (see 3.6.5 and Figure 1). Targets with evidence of a flyer (see 6.10.1) or keyholing (see 6.10.2) shall be cause to repeat the test by firing a ten round complement.

4.5.6.5 Sight setting. The optimum sight setting obtained during the targeting and accuracy test shall be maintained on accepted weapons being prepared for shipment.

4.5.7 Endurance.

4.5.7.1 Endurance functioning. Each weapon shall be fired in accordance with the Operator's Manual 9-1005-319-10 and shall be held in a firing stand simulating shoulder firing in accordance with drawing 11837945 (auto firing), using ammunition M855, 5.56mm ball

MIL-DTL-71186A

cartridges in accordance with drawing 9342868.

- a. Firing procedure. Firing shall be accomplished in 50 cycles using 30 round magazines. One (1) firing cycle shall be as specified in Table V. Cooling of the barrel shall be to the point that it is capable of being held by the bare hand. Supplemental cooling is permissible in the hand guard area.

TABLE V. Firing cycle

<u>MAGAZINE</u>	<u>REMARKS</u>
30 rounds	Automatic – bursts of approximately 5 rounds each.
30 rounds	Automatic – one continuous burst.
30 rounds	Semi-Automatic - rate of 10 to 30 rounds per minute.
30 rounds	Semi-Automatic - rate of 10 to 30 rounds per minute.
Total : 120 rounds per cycle	

- b. Cleaning and lubrication. Weapons shall be cleaned and lubricated at the beginning of the test and at the end of every 10 cycles. Weapons shall be lubricated after the fifth cycle and at every 10 cycle increment. No other cleaning and lubrication shall be performed during this test. At the close of each day's firing, the weapon shall be protected against corrosion.
- i. Lubrication. Weapons shall have been lubricated using lubricant in accordance with MIL-PRF-63460. Apply a light coat of oil to all surfaces of the bolt carrier group. (Do not apply excessive oil in the bolt firing pin recess.) Apply a moderate coat of oil on all firing mechanism components in lower receiver.
- ii. Cleaning. Weapons shall be cleaned with a cleaning solvent in accordance with MIL-PRF-372 and the following procedures:
1. Barrel. Brush bore thoroughly with a brush soaked in cleaning solvent. Brush the bore from the chamber to the muzzle using straight through strokes. Do not reverse direction of brush until it extends beyond the muzzle. Continue brushing until the bore is covered with solvent. Dry the bore by pushing clean dry swabs through the bore. Continue until the swab comes out clean and dry. Clean dry compressed air may be used for preliminary drying.
 2. Barrel chamber. Insert the cleaning rod section and chamber

MIL-DTL-71186A

brush that has been dipped in cleaning solvent into the chamber and use reciprocating plunge strokes and rotational 360⁰ motions. Dry chamber with cleaning swabs.

3. Barrel extension. Using a small bristle brush that has been dipped in cleaning solvent, clean the locking lugs in the barrel extension. Remove excess cleaning solvent.
 4. Bolt carrier group. With the exception of the bolt carrier key, bolt rings, extractor spring and the ejector, disassemble all parts, wash these parts in cleaning solvent and remove all carbon deposits. Particular attention shall be given to the areas under the face of the extractor and behind the three rings on the bolt. Clean the bolt carrier key hole with a worn bore brush that has been dipped in cleaning solvent by rotating the brush clockwise (repeat several times until clean). Remove excess solvent and dry.
 5. Upper receiver. Clean with cleaning solvent and remove all powder fouling. Clean the protruding gas tube using a bore brush attached to a section of the cleaning rod. Saturate the brush with cleaning solvent. (Do not use any type of abrasive material to clean the gas tube. Remove excess cleaning solvent.)
 6. Lower receiver. Remove all carbon residue from lower receiver group assembly using cleaning solvent. Drain excess solvent from lower receiver cavity and dry.
 7. Magazine. The twenty (20) 30 round magazines used in each weapon shall be numbered and used in rotation during this test. Magazines (13021312) for endurance testing. Magazines shall be fully loaded for each use. Each magazine used during this test shall be cleaned at the specified cleaning interval for the weapon with a cleaning solvent in accordance with MIL-PRF-372 and blown dry with prepared compressed air.
- c. Unrestrained firing. During the 18th and 36th firing cycle, the semi-automatic firing shall be conducted outside the firing stand by firing the weapon held in the hands not touching the shoulder and without restraining the normal recoil of the weapon.
 - d. Failure to lock. In the event of a failure of the bolt to lock, the forward assist assembly shall be operated.
 - e. Replacement of parts. No parts shall be altered during the test. Broken

MIL-DTL-71186A

parts that affect function and those parts that are worn to the extent they are unserviceable (see 6.10.3) shall be replaced.

- f. Analysis. When either a malfunction occurs or a weapon fails to meet a test requirement, a failure analysis shall be performed to determine the causes. The failure analysis shall include dimensional and physical tests. Components shall not be disassembled from the weapon for inspection and test unless determined necessary.

4.5.7.2 Endurance firing cycle rate. The cyclic rate of fire for weapons being fired shall be measured and recorded during the second magazine (AUTO) of the first cycle and the second magazine (AUTO) of every ninth cycle thereafter.

4.5.7.3 Endurance target and accuracy.

4.5.7.3.1 Endurance preparation for firing. The front and rear sights shall be set as specified in accordance with the Operator's Manual 9-1005-319-10.

4.5.7.3.2 Endurance warm-up shots. No more than five warm-up shots, off the test target, shall be allowed before the weapons are tested for targeting and accuracy.

4.5.7.3.3 Endurance firing procedure. The selector lever shall be set on "SEMI" and the firing sights shall be aligned on the point of aim specified in Figure 1. The allocated number of rounds shall be fired and then the target shall be checked to determine that the targeting and accuracy requirements have been met (see 3.6.5 and Figure 1). Targets with evidence of a flyer (see 6.10.1) or keyholing (see 6.10.2) shall be cause to repeat the test by firing a ten round complement.

4.5.7.3.4 Endurance sight setting. The optimum sight setting obtained during the targeting and accuracy test shall be maintained on accepted weapons being prepared for shipment.

4.5.7.4 Endurance barrel assembly integrity. Upon completion of 2,400 and 6,000 rounds, the barrel assembly shall be magnetic particle inspected in accordance with ASTM E1444 utilizing a current of 400 to 500 amperes for circular continuous magnetization. The barrel assembly shall be examined for evidence of cracks, seams and other injurious defects.

4.5.7.5 Endurance bolt assembly integrity. Upon completion of 2,400 and 6,000 rounds, the bolt shall be magnetic particle inspected in accordance with ASTM E1444 utilizing standard five turn magnetizing coil with a current of 200 to 300 amperes. Both circular and longitudinal continuous magnetization with wet fluorescent solution shall be used. The bolts shall be examined for evidence of cracks, seams and other injurious defects.

4.5.7.6 Endurance headspace measurement. Headspace for weapons shall be measured and recorded at the beginning of the test and at the completion of the 50th cycle in accordance with 4.5.3.2. If after the 50th cycle, the headspace is more than .0028 inches greater than the

MIL-DTL-71186A

initial measurement the sample shall be rejected. If after the 50th cycle, the headspace exceeds 1.4730 inches the sample shall be rejected.

4.5.7.7 Endurance bolt action indent. The bolt shall be retracted to the open rearward position and held open. A zero indicator reading shall be made on the height of the copper compression cylinder before insertion into the chamber adapter. The chamber adapter containing the copper compression cylinder shall then be inserted in the barrel chamber. The bolt shall be manually returned to the battery position, the trigger shall be pulled to release the hammer and indent the copper compressions cylinder. The chamber adapter shall be removed from the barrel chamber and the depth of the indent on the copper compression cylinder computed by measuring the distance from the original zero indicator reading to the bottom of the firing pin impression.

4.5.7.8 Endurance muzzle down position indent. The weapon shall be held in a muzzle down position with the muzzle end supported. The bolt shall be retracted to the rearward position and held open. A zero indicator reading shall be made on the height of the copper pressure cylinder before insertion into the chamber adapter. The chamber adapter containing the copper compression cylinder shall then be inserted into the barrel chamber. The bolt shall be returned to the battery position under spring action. The trigger shall not be pulled. The chamber adapter shall be removed from the barrel chamber and the depth of the indent in the copper compression cylinder computed by measuring the distance from the original zero indicator reading to the bottom of the firing pin impression. The indent impression shall be visually examined to determine if the concentricity requirement has been met.

4.5.7.9 Endurance firing pin indent location. The firing pin indent position on pressure cylinder shall be measured using approved Standard Measuring & Testing Equipment (SM&TE).

4.5.7.10 Endurance firing pin protrusion. The firing pin protrusion shall be tested using approved SM&TE with the firing pin in the fired position as specified in accordance with drawing 13004722.

4.5.8 Interchangeability. The allocated weapons shall be tested for interchangeability by disassembling and then reassembling parts using the parts and the prearranged system provided herein. Interchange of parts shall be accomplished by dividing the parts of each weapon into ten (10) groups of non-mating parts as shown Table IV (as applicable), and distributing the groups into 10 different trays until each tray contains parts for a complete weapon. Groups of parts from the first weapon shall be taken in order and placed in trays one (1) through ten (10) in that sequential order; groups of parts from the second weapon shall be taken in order and placed starting at tray two (2) through tray ten (10) and finishing in tray one (1); groups of parts from the third weapon shall be taken in order and placed starting in tray three (3) through tray ten (10) and finishing in tray two (2); and so on. Commercial parts such as screws, spring pins, etc., shall be placed in the same tray as their mating or associated part. Any commercial part rendered unserviceable by disassembly shall be replaced without penalty to the interchangeability test. The weapons shall be reassembled using only those parts which are in the same tray.

MIL-DTL-71186A

TABLE VI. Group of non-mating parts.

Group I	
Takedown Pin Detent	8448585 (2)
Upper Receiver	12972670
**Rear Sight Spring Pin	MS16562-103
Magazine Catch Spring	8448637
Trigger	8448592
Front Sight Post	9349056
Lock Washer	MS35335-61
Buttstock Lock Spring	9390027

Group II	
*Barrel	12991849
*Barrel Extension	9390030
*Barrel Indexing Pin	8448551
*Front Sight	12972681
*Taper Pin	8448575 (2)
*Handguard Cap	9390002
*Barrel Nut	8448553
Lower Receiver w/ Receiver Extension and Receiver Extension Nut and Receiver End Plate	12972652 w/ 9390019 and 9390020 and 9390021
Extractor Pin	8448513
Ejection Port Cover Assembly	8448525
Buttstock Lock Pin Nut	9390026

Group III	
Bolt w/ Bolt Rings	8448510 w/ 8448511 (3)
Ejection Port Cover Pin	8448533
Snap Ring	MS16632-3012
Front Sight Detent	8448573
**Trigger Guard Pivot Pin	MS16562-129
Trigger Spring	8448593
Takedown Pin	8448584
Magazine Release Button	8448636
**Spring Pin	MS16562-121

Group IV	
Key & Bolt Carrier Assembly	8448505
Takedown Detent Spring	8448586 (2)
Handguard Slip Ring	8448712
Ejector and Safety Detent Spring	8448516 (2)
Buffer Retainer	8448582
Trigger and Hammer Pin	8448609 (2)
Front Sight Detent Spring	8448574
Buttstock Release Lever	9390014
Swivel Mount w/ Sling Swivel and Rivet	12598617 w/ 8448971 and 8448697

Group V	
Buffer Retainer Spring	8448583
Sliding Buttstock	12012081
Ejection Port Cover Spring	8440532
**Ejector Pin	MS16562-98
Magazine Catch	8448638
Disconnect	8448635
Plunger Assembly	9349085
Frame Assembly	12996813
Pistol Grip Screw	AN501D-416-18
Handguard Spring Assembly	8448555

Group VI	
Bolt Cam Pin	8448502
Bolt Catch	8448628
Pistol Grip	9349127
Buffer Assembly	8448615
**Pawl Spring Pin	8448521-2
Handguard Retaining Ring	AER10X137000GF6LF1
Index Spring	9349069 (2)
Buttstock Lock Pin	9390025
**Swivel Mount Pin	MS39086-41 (2)

MIL-DTL-71186A

TABLE VI. Group of non-mating parts - Continued

Group VII		Group VIII	
Ejector	8448515	Receiver Pivot Pin	8448621
Spring	12996820	Firing Pin	8448503
Gas Tube Assembly	9390016	Windage Screw	12996822
Hammer & Hammer Pin Retainer Assembly	8448612	**Gas Tube Pin	MS16562-106
Compensator	9349051	Upper Handguard Assembly	12973096
Firing Pin Retaining Pin	8448504	Bolt Catch Spring	8448633
Catch Plunger	8448634	Automatic Sear Pin	8448599
Pawl	8448543	**Crush Washer	12991533
Plunger	12996821	**Recoil Screw	12996824
Swivel Mount Locking Bar	12598618	Pawl Detent	8448544
		Locking Bar	12996823
Group IX		Group X	
Rear Sight Windage Knob	9349077	Extractor w/	8448512 w/
Charging Handle Assembly	8448517	Spring Assembly	13004786
**Bolt Catch Pin	MS16562-119	Trigger Guard Assembly	8448587
Hammer Spring	8448611	Lower Handguard Assembly	12973099
Fire Control Selector	9381367	Automatic Sear Assembly	8448595
Bolt Spring	8448542	Action Spring	9390022
Sight Cam	12996819	Fire Control Selector Detent	8448631
**Buttstock Spring Pin	MS16562-202	Plunger Spring	8448540
** Retaining Ring	MS16624-3035	Rear Sight Ball	MS19060-4808 (2)
		Disconnect Spring	12972695
		Sight Base	12996818
Note:			
All items preceded by a single asterisk (*) shall form 1 (one) permanent Barrel and Front Sight Assembly. All items preceded by a double asterisk (**) shall be replaced during interchangeability test. Parts inadvertently damaged during interchange may be replaced without penalty when authorized and verified by the government representative witnessing the test.			

4.5.8.1 Interchangeability headspace.

4.5.8.1.1 Minimum headspace. After the high pressure resistance test (see 4.5.3.1), the bolt shall be moved rearward to the open position. The gage in accordance with drawing 8443915 shall be inserted in the chamber and the bolt shall be returned to the battery position. Only finger pressure shall be applied to close the bolt. To be acceptable the bolt shall fully close.

4.5.8.1.2 Maximum headspace. After the high pressure resistance test (see 4.5.3.1), the bolt shall then be retracted to the open position. The gage in accordance with drawing 8443949 shall be inserted in the chamber and the bolt returned to the battery position. Only finger pressure shall be used to close the bolt. To be acceptable the bolt shall not fully close.

4.5.8.2 Interchangeability firing pin indent.

4.5.8.2.1 Interchangeability firing pin indent. The firing pin indent shall be measured

MIL-DTL-71186A

utilizing gage indicator in accordance with drawing 8440218, plug gage in accordance with drawing 8440219, plug gage in accordance with drawing 8440220, and copper compression cylinders in accordance with drawing 8440920 for insertion in the barrel chamber.

4.5.8.2.2 Interchangeability bolt action indent. The bolt shall be retracted to the open rearward position and held open. A zero indicator reading shall be made on the height of the copper compression cylinder before insertion into the chamber adapter. The chamber adapter containing the copper compression cylinder shall then be inserted in the barrel chamber. The bolt shall be manually returned to the battery position, the trigger shall be pulled to release the hammer and indent the copper compressions cylinder. The chamber adapter shall be removed from the barrel chamber and the depth of the indent on the copper compression cylinder computed by measuring the distance from the original zero indicator reading to the bottom of the firing pin impression.

4.5.8.2.3 Interchangeability muzzle down position indent. The weapon shall be held in a muzzle down position with the muzzle end supported. The bolt shall be retracted to the rearward position and held open. A zero indicator reading shall be made on the height of the copper pressure cylinder before insertion into the chamber adapter. The chamber adapter containing the copper compression cylinder shall then be inserted into the barrel chamber. The bolt shall be returned to the battery position under spring action. The trigger shall not be pulled. The chamber adapter shall be removed from the barrel chamber and the depth of the indent in the copper compression cylinder computed by measuring the distance from the original zero indicator reading to the bottom of the firing pin impression. The indent impression shall be visually examined to determine if the concentricity requirement has been met.

4.5.8.2.4 Interchangeability firing pin indent location. The firing pin indent position on pressure cylinder shall be measured using approved Standard Measuring & Testing Equipment (SM&TE).

4.5.8.2.5 Interchangeability firing pin protrusion. The firing pin protrusion shall be tested using approved SM&TE with the firing pin in the fired position as specified in accordance with drawing 13004788.

4.5.8.3 Interchangeability trigger pull.

4.5.8.3.1 Interchangeability minimum trigger pull.

- a. Release the trigger. Place the selector to SEMI. Hold the weapon in the vertical position. Using trigger pull measuring fixture, 7274758, gradually add 5.5 lbs (2.49 kg) to the center of the trigger and exerted in line parallel to the axis of the barrel bore. To be acceptable, the hammer shall not release.

4.5.8.3.2 Interchangeability maximum trigger pull.

- a. Release the trigger. Place the selector to SEMI. Hold the weapon in the vertical position. Using trigger pull measuring fixture, 7274758, gradually

MIL-DTL-71186A

add 8.5 lbs (4.31 kg) to the center of the trigger and exerted in line parallel to the axis of the barrel bore. To be acceptable, the hammer shall release.

4.5.8.3.3 Interchangeability creep. The weapon shall also be manually tested to assure that the trigger pull is free of creep (see 3.6.2.3) and that the trigger returns under spring action to its normal forward position after partial or complete trigger pull.

4.5.8.4 Interchangeability function firing.

4.5.8.4.1 Interchangeability function firing semi-automatic. Each weapon shall be fired in accordance with the Operator's Manual 9-1005-319-10 and shall be held in a firing stand simulating shoulder firing per 11837943 (semi-automatic/targeting and accuracy firing), using ammunition M855, 5.56mm ball cartridges in accordance with drawing 9342868.

4.5.8.4.2 Interchangeability function firing automatic. Each weapon shall be fired in accordance with the Operator's Manual 9-1005-319-10 and shall be held in a firing stand simulating shoulder firing in accordance with drawing 11837945 (automatic firing), using ammunition M855, 5.56mm ball cartridges in accordance with drawing 9342868. The selector lever shall be set on "AUTO" for continuous burst firing. The M4A1 shall be fired using a fully loaded 30 round magazine by pulling the trigger and holding rearward until it stops firing.

4.5.8.5 Interchangeability cyclic rate of fire. The cyclic rate of fire measurement shall be taken during the function firing automatic test (see 4.5.8.4.2), on a minimum of twenty (20) round continuous burst when using a 30 round magazine, while the selector lever is set on "AUTO". The cyclic rate of fire shall be measured using test equipment in accordance with drawing 8443572 and shall be recorded.

4.5.8.6 Interchangeability target and accuracy.

4.5.8.6.1 Interchangeability preparation for firing. The targeting requirement criteria shall be with the BUIS set centrally in the slot for windage within plus or minus seventeen (17) clicks.

4.5.8.6.2 Interchangeability warm-up shots. No more than five warm-up shots, off the test target, shall be allowed before the weapons are tested for targeting and accuracy.

4.5.8.6.3 Interchangeability firing procedure. The selector lever shall be set on "SEMI" and the firing sights shall be aligned on the point of aim specified in Figure 1. The allocated number of rounds shall be fired and then the target shall be checked to determine that the targeting and accuracy requirements have been met (see 3.6.5 and Figure 1). Targets with evidence of a flyer (see 6.10.1) or keyholing (see 6.10.2) shall be cause to repeat the test by firing a ten round complement.

4.5.8.6.4 Interchangeability sight setting. The optimum sight setting obtained during the targeting and accuracy test shall be maintained on accepted weapons being prepared for shipment.

MIL-DTL-71186A

4.5.9 Unique identification (UID). The weapon shall be visually and electronically examined to determine compliance with drawing 12972652.

4.5.10 Workmanship. Workmanship shall be in accordance with the workmanship requirements of MIL-W-13855, MIL-W-63150 and visual inspections.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The M4A1 carbine is intended for use by military personnel as a combat weapon.

6.2 Acquisition requirements. Acquisition documents should specify the following:

- a. Title, number, and date of this specification.
- b. Lists of drawings and specifications pertinent to the carbine, showing applicable revision dates.
- c. Examination, testing criteria and alternate sample size for components and weapons (see 4.7.5, 4.14.1, 6.7.1-6.7.26).
- d. Disposition of interchangeability and endurance tested carbines.
- e. Requirements for submission of first article sample (see 3.1 and 4.2.1).
- f. Responsibility for furnishing ammunition.
- g. Quantity, shipping instructions and test procedures for M4A1 carbines required for interplant interchangeability test (see 4.17.1).
- h. Procedures and method's for demilitarizing and disposing of rejected material.
- i. Disposition of Government furnished property.
- j. Interplant interchangeability.

6.3 Testing firing facilities. Test firing facilities and operating procedures should be designed by the contractor in conformance with local, state, and Federal regulations and suitable for carrying out prescribed firing tests with safety of operating and visiting personnel.

MIL-DTL-71186A

6.4 Malfunction classifications.

- a. Failure of bolt to lock. Failure of bolt to fully close and rotate to the locked position in the barrel extension.
- b. Failure of the forward assist assembly to assist bolt closure. Failure of the pawl of the forward assist assembly to engage or remain engaged with the bolt carrier serrations during manual attempt to lock the bolt, when the bolt fails to lock on return to the battery position.
- c. Doubling. During semi-automatic firing, carbines should be checked to assure that no doubling occurs (i.e., two shots fired with a single trigger pull). Doubling should be recorded as a malfunction.
- d. Failure to fire. Failure of the carbine to fire the cartridge, when the cartridge has been fully chambered, bolt has been locked in the battery position, and the trigger has been pulled.
- e. Failure to feed from magazine. Failure of the bolt to completely strip the next round from the magazine.
- f. Failure to eject. Failure of the carbine to eject a round from the carbine, when the cartridge has been fired and the cartridge case has been completely extracted from the chamber.
- g. Failure to chamber. Failure of the carbine to chamber a cartridge that has been completely stripped from the magazine.
- h. Failure to extract. Failure of the carbine to remove a cartridge case or unfired cartridge from the chamber.
- i. Bolt fails to hold to the rear. Failure of the bolt to remain in the rearward position after the last round in the magazine has been fired.

6.4.1 Class of malfunction.

Class I. Clearable stoppages. A stoppage that can be cleared by the weapon operator within 10 seconds.

Class II. Clearable Operator correctable stoppages. A stoppage that cannot be cleared by the operator within 10 sec, but can be corrected at the operator level using only equipment immediately available to the operator.

Class III. System failures. A failure that is not correctable at the operator level and requires a higher level of maintenance.

6.4.2 Defective carbine. A defective carbine is a unit of product which contains one or more defects (end item assembly or component).

6.5 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: RDAR-QEW-C, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

MIL-DTL-71186A

6.6 Submission of alternative conformance provisions. Alternative conformance procedures, methods or equipment, such as statistical process control, tool control, other types of sampling procedures, etc. may be used by the contractor when they provide as a minimum the level of quality assurance required by the provisions specified herein. Prior to applying methods or equipment, the contractor should describe them in a written proposal submitted to the government for evaluation (see 6.2). When required, the contractor should demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality assurance provision(s) herein. In cases of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification should apply. All approved alternative provisions should be specifically incorporated into the contractor's quality program or detailed inspection system, as applicable.

6.7 Endurance alternate sample size. If five (5) successive inspection lots meet the requirements, the inspection lot size should be increased to 5,000 M4A1s or a month's production, whichever is smaller, and the inspection sample selected. If rejection of the inspection sample occurs at any time, the inspection lot size of 1,000 M4A1s (or smaller) should be reinstated and the above procedures repeated in returning to the 5,000 M4A1 (or smaller) lot size.

6.8 Interchangeability alternate sample size. If five successive inspection lots meet the requirements, the inspection lot size should be increased to 5,000 M4A1s or a month's production, whichever is smaller, and the inspection sample selected. If rejection of the inspection sample occurs at any time, the inspection lot size of 1,000 M4A1s (or smaller) should be reinstated and the above procedures repeated in returning to the 5,000 M4A1 (or smaller) lot size.

6.9 Interplant interchangeability. Each contractor should submit monthly, five M4A1s for verification, unless otherwise specified. An interplant interchangeability test should be performed using five (5) Government Furnished Equipment (GFE) (see 6.12) weapons representing production from each of the previous manufacturers and five (5) weapons of the contractor's manufacture. This test should be conducted for each set of five (5) GFE weapons. All GFE weapons should be inspected, and the Government should be informed of any non-compliance. The M4A1s subjected to interplant interchangeability test should be given a preliminary hand functioning to assure proper operation before parts are disassembled from the M4A1. The M4A1s should be tested for headspace, firing pin indent, trigger pull, function firing, cyclic rate of fire, and target and accuracy tests specified in methods of inspection 4.6, 4.7, 4.9, 4.13, 4.14, and 4.15 respectively. When assembling, every other M4A1 used should be produced by a different manufacturer. Inspection, tests and acceptance criteria normally associated with interchange weapons (see 4.17) should be performed. Parts should be identified with their manufacturer throughout the test.

6.10 Definitions.

6.10.1 Flyer. A flyer is defined as a shot hole which is a greater distance from the nearest shot hole than the extreme spread of the other nine holes (including the shot hole nearest the

MIL-DTL-71186A

flyer).

6.10.2 Keyholing. Keyholing is defined as any shot hole on the target that is not circular.

6.10.3 Unserviceable part. An unserviceable part is one that causes malfunction of the carbine or impairs the safety of the user. Parts which are worn, broken, deformed, cracked or contain defects to the extent that they may affect function or safety in operation of the carbine should also be considered unserviceable. If a part exhibits an indication of a crack, seam or other injurious defect, the government reserves the right to determine, through a destructive test (i.e. sectioning of the part and polishing), whether or not a crack, seam or other injurious defect is present. If the defect is verified by the destructive test, immediate action should be taken to correct this deficiency.

6.10.4 Binding. To become hindered from free movement due to unexpected contact between surfaces or parts not designed to do so.

6.10.5 Hammer (fall). Motion of the hammer under spring action from its cocked position to its stop position against the bolt carrier assembly.

6.10.6 Hammer (not fall). The hammer does not move from its cocked position to its stop position.

6.10.7 Charge. To pull the charging handle to the rear so that hammer becomes locked by the trigger.

6.10.8 Tactile. Perceptible by touch with an increase in force needed to remain in motion

6.10.9 Full trigger pull. The position where the trigger will not depress any further and the hammer has been released.

6.10.10 Partial trigger pull. Trigger position greater than 50% of the way to the point where the hammer is released.

6.10.11 Battery position. Bolt is forward and locking lugs are locked.

6.11 Recording Data.

6.11.1 Sight setting. The following data should be recorded:

- (1) Number of weapons tested and number of weapons rejected per shift.
- (2) Test date.
- (3) Ammunition lot number.
- (4) Extreme spread of shot group.
- (5) Reason for retest (flyer and keyholing).
- (6) For each weapon that fails, record the following:

MIL-DTL-71186A

- (i) Serial number.
- (ii) Type of malfunction or failure (see 6.4).
- (iii) Type of magazine (30 round magazine).

6.11.2 The following data should be recorded:

- (1) Inspection lot number.
- (2) Weapon serial numbers.
- (3) Each malfunction and unserviceable part (see 6.4 and 6.10.3).
 - (i) Weapon round at which it occurred.
 - (ii) Weapon serial numbers.
 - (iii) Type of firing (automatic or semi-automatic).
 - (iv) Class of malfunction.
- (4) Ammunition lot number.
- (5) Headspace measurement.
- (6) Each rate of fire measurement with identification of which cycle.
- (7) Each ammunition defect.
- (8) The cause of each weapon failure.
- (9) If applicable, cause of test failure.
- (10) Type of magazine (30 round magazine).

6.12 Government furnished equipment. The contracting officer should arrange to furnish the property listed if required:

- a. Weapon components used for interplant interchange

6.13 Subject term (key-word) listing.

Gun
Small arms
Weapon
Accuracy

MIL-DTL-71186A

6.14 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army – AR
Navy – OS
Air Force – 99

Preparing activity:
Army – AR
(Project 1005-2009-004)

Review activities:
Navy – AS, MC
Air Force – 84
DLA – CC
Other – FAS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil> .